
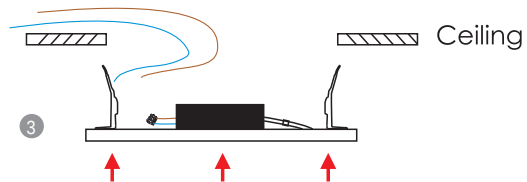
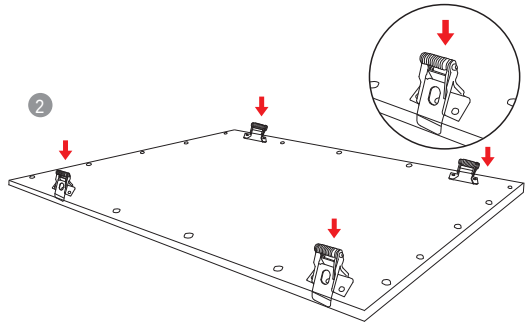



► RECESSED IN A CUT-OUT HOLE

Accessories	3030	3060	6060	6262	30120	60120
	X 4			X 6		

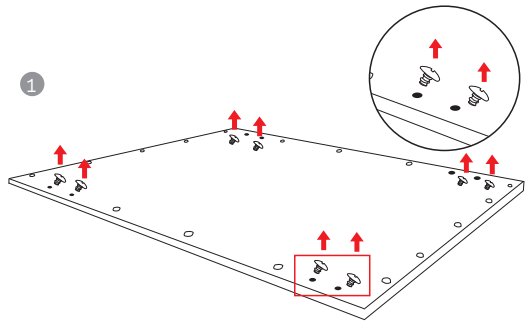

Cut-Out:

PL33: 280X280mm	PL66: 580X580mm
PL63: 580X280mm	PL6262: 600X600mm
PL1203: 1180X280mm	PL1206: 1180X580mm

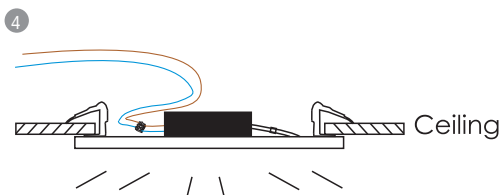

Storage Info

Environmental Operating	-10°C to +40°C
Environmental Rating	Dry or damp location rated
Environmental Storage	-40 ° C to +60 ° C



BEFORE YOU BEGIN

Read these instructions completely and carefully.

⚠ WARNING/AVERTISSEMENT

RISK OF ELECTRIC SHOCK

- Turn power off before inspection, installation or removal.
- Properly ground electrical enclosure.

RISK OF FIRE

- Follow all NEC and local codes.
- Use only UL or IEC approved wire for input/output connections. Minimum size 18 AWG (0.75mm²).

Prepare Electrical Wiring

Refer to PL Series LED Panel Specification for more lamp electronical data info.



Electrical Requirements

- The LED luminaire must be connected to the mains supply according to its ratings on the product label.



Grounding Instructions


- The grounding and bonding of the overall system shall be done in accordance to local electric code of the country where the luminaire is installed.



Light Up Your Health


SKY LIGHT PANEL USER MANUAL

► RECESSED IN FALSE-CEILING FRAME

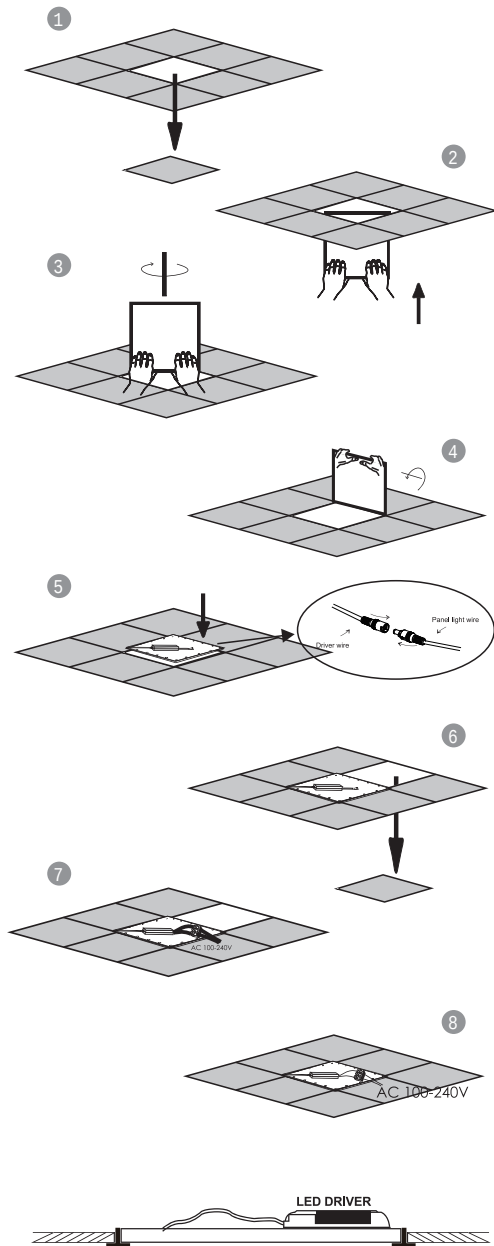

► FRAME MOUNTED

Accessories	3030	3060	6060	6262	30120	60120
Frame A		X 2			X 2	
Frame B		X 2			X 2	
		X 8			X 8	
		X 4			X 6	

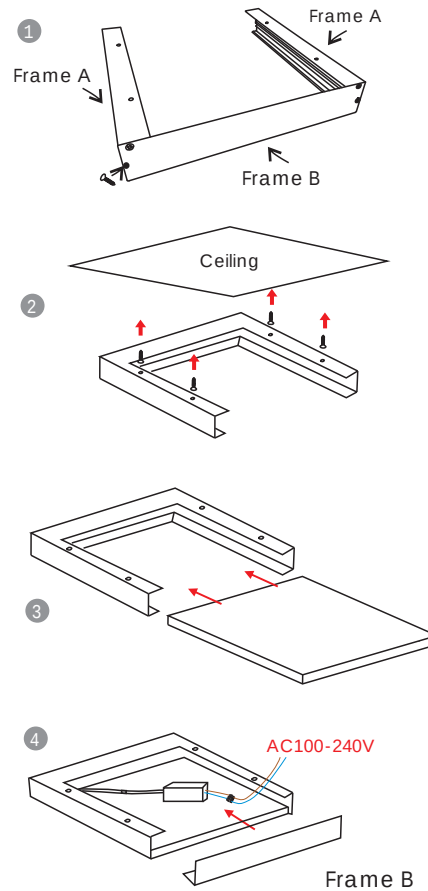

► SUSPENSION

Accessories	3030	3060	6060	6262	30120	60120
		X 2			X 3	
		X 2			X 3	
		X 4			X 6	
wire A		X 2			X 3	
wire B		X 2			X 3	

