


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.1V I:0.1222A P:25.631W PF:0.9533 Freq:49.99Hz Lamp Flux:3354.28x1 lm		
Name: LM-7550-E12-26	Type: LED	Cover color:
Model No:	DIM.: 1133*50mm	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.87 lm/W			
MODEL		I _{max} (cd)	3238	S/MH (C0/180)	0.99
NOMINAL POWER (W)	26	LOR (%)	100.0	S/MH (C90/270)	0.98
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	3354.3	η UP, DN (C0-180)	0.3, 46.0
NOMINAL FLUX (lm)	3354.28	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 53.0
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	220	η down (%)	99.0	CIBSE SHR MAX	1.05

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

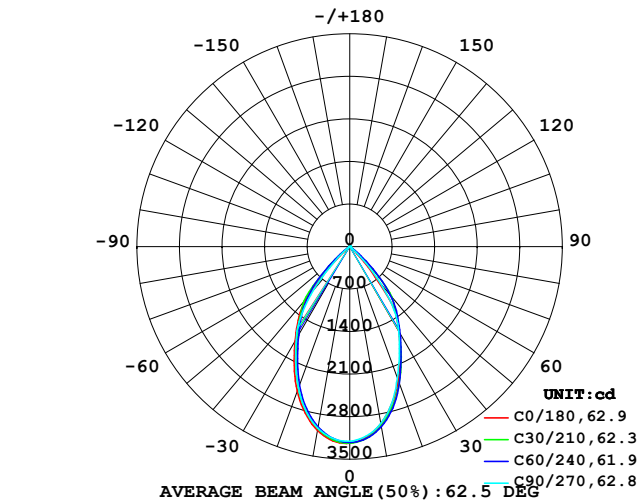

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

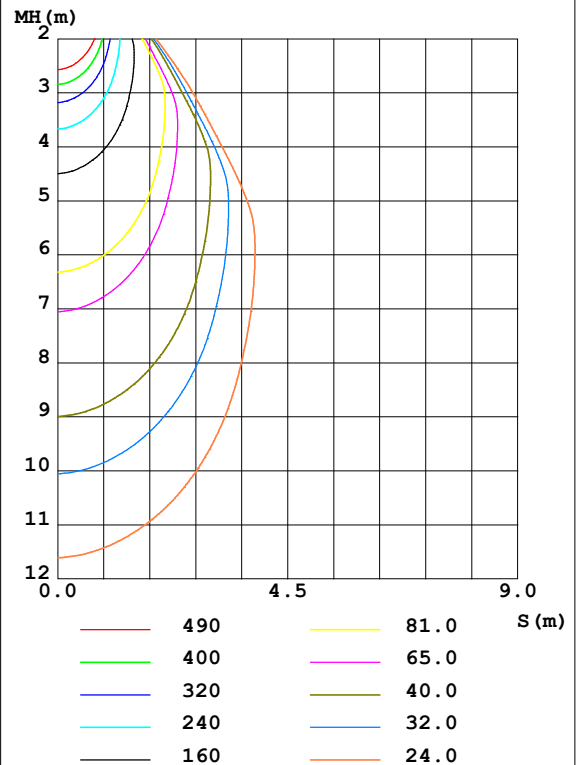

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-08-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2957	2998	2952	2878	3070	3025	3032	3095	0- 10	296.6	296.6	8.84,8.84
20	2339	2388	2299	2209	2531	2448	2472	2586	10- 20	765.1	1062	31.7,31.7
30	1625	1651	1616	1495	1803	1712	1768	1856	20- 30	933.5	1995	59.5,59.5
40	654.1	1057	781.9	872.3	1055	1115	917.6	1225	30- 40	846.9	2842	84.7,84.7
50	36.68	184.5	74.16	105.1	68.94	219.2	98.00	355.4	40- 50	411.0	3253	97,97
60	10.88	12.64	13.82	9.336	17.17	15.14	17.59	20.02	50- 60	47.70	3301	98.4,98.4
70	3.597	5.117	5.764	4.153	8.020	8.703	9.842	10.22	60- 70	9.827	3311	98.7,98.7
80	1.514	2.440	2.648	2.149	5.677	6.567	7.312	7.531	70- 80	5.803	3316	98.9,98.9
90	1.411	1.794	1.829	1.589	6.607	6.540	6.579	7.209	80- 90	4.710	3321	99,99
100	2.033	1.850	1.850	2.042	7.845	7.385	7.246	7.965	90-100	4.809	3326	99.2,99.2
110	2.739	2.496	2.444	2.694	8.765	8.210	7.963	8.460	100-110	5.433	3331	99.3,99.3
120	3.341	3.089	2.993	3.263	9.067	8.501	8.227	8.755	110-120	5.672	3337	99.5,99.5
130	3.809	3.530	3.397	3.702	8.572	8.234	8.077	8.451	120-130	5.352	3342	99.6,99.6
140	4.002	3.724	3.625	3.904	7.636	7.523	7.493	7.687	130-140	4.545	3347	99.8,99.8
150	4.004	3.686	3.646	3.902	6.508	6.538	6.602	6.645	140-150	3.438	3350	99.9,99.9
160	3.848	3.574	3.545	3.753	5.363	5.416	5.572	5.484	150-160	2.267	3353	100,100
170	3.731	3.526	3.471	3.684	4.201	4.381	4.589	4.528	160-170	1.222	3354	100,100
180	3.672	3.690	3.818	3.845	3.677	3.709	3.797	3.837	170-180	0.3724	3354	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3122.3 lm

%lum = 93.1%

%lamp = 93.1%

Conical surface Flux(120deg): 3300.8 lm

%lum = 98.4%


%lamp = 98.4%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-08-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.1V I:0.1222A P:25.631W PF:0.9533 Freq:49.99Hz Lamp Flux:3354.28x1 lm		
Name: LM-7550-E12-26	Type: LED	Cover color:
Model No:	DIM.: 1133*50mm	
MFR.:		

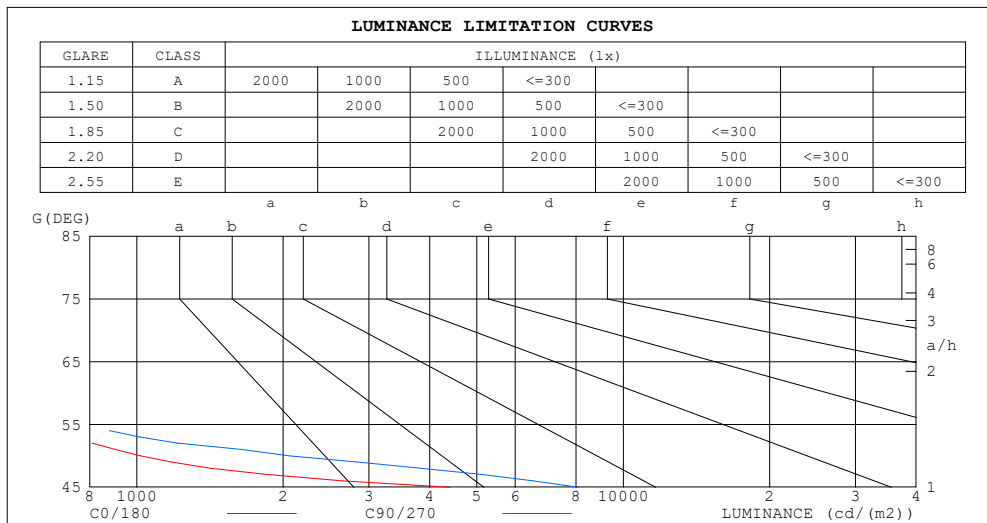

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	269	469
80	156	272
75	144	254
70	188	301
65	276	372
60	388	494
55	572	778
50	1019	2060
45	4403	8077


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-08-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.1V I:0.1222A P:25.631W PF:0.9533 Freq:49.99Hz Lamp Flux:3354.28x1 lm		
Name: LM-7550-E12-26	Type: LED	Cover color:
Model No:	DIM.: 1133*50mm	
MFR.:		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.10	1.07	1.05	1.08	1.05	1.03	1.03	1.01	.00	.99	.98	.97	.96	.95	.94	.92
2.0	1.01	.97	.94	.00	.96	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.94	.89	.84	.92	.87	.84	.90	.85	.82	.87	.84	.81	.85	.82	.79	.78
4.0	.87	.81	.77	.86	.80	.76	.83	.79	.75	.81	.77	.74	.79	.76	.73	.71
5.0	.81	.75	.70	.80	.74	.70	.78	.73	.69	.76	.72	.68	.74	.70	.67	.66
6.0	.75	.69	.64	.74	.68	.64	.73	.67	.63	.71	.66	.63	.70	.66	.62	.61
7.0	.70	.64	.59	.69	.63	.59	.68	.63	.59	.67	.62	.58	.65	.61	.58	.56
8.0	.66	.59	.55	.65	.59	.55	.64	.58	.54	.63	.58	.54	.62	.57	.54	.52
9.0	.62	.55	.51	.61	.55	.51	.60	.54	.51	.59	.54	.50	.58	.53	.50	.49
10.0	.58	.52	.48	.57	.51	.47	.56	.51	.47	.56	.51	.47	.55	.50	.47	.45

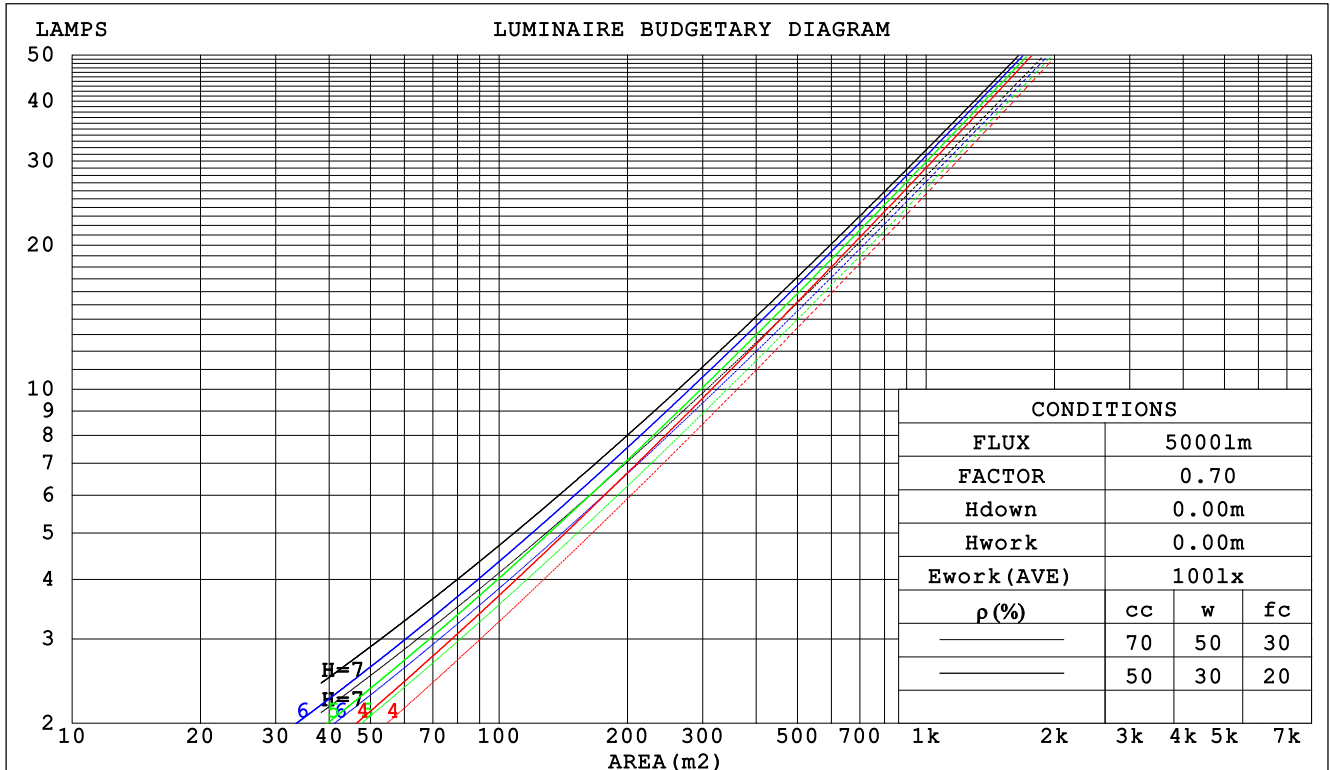

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-08-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

WEC AND CCEC

Test:U:220.1V I:0.1222A P:25.631W PF:0.9533 Freq:49.99Hz		
Lamp Flux:3354.28x1 lm		
Name: LM-7550-E12-26	Type: LED	Cover color:
Model No:	DIM.: 1133*50mm	
MFR.:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.190	.108	.034	.183	.105	.033	.170	.098	.031	.158	.091	.029	.147	.085	.027		
2.0	.183	.100	.031	.177	.098	.030	.166	.092	.029	.156	.087	.027	.146	.083	.026		
3.0	.175	.093	.028	.170	.091	.027	.161	.087	.026	.152	.083	.025	.143	.079	.025		
4.0	.167	.087	.026	.163	.085	.025	.154	.082	.024	.147	.079	.024	.139	.076	.023		
5.0	.160	.081	.024	.156	.080	.023	.148	.077	.023	.141	.075	.022	.135	.072	.022		
6.0	.152	.076	.022	.149	.075	.022	.142	.073	.021	.136	.071	.021	.130	.069	.020		
7.0	.146	.072	.020	.143	.071	.020	.137	.069	.020	.131	.067	.020	.126	.065	.019		
8.0	.139	.068	.019	.136	.067	.019	.131	.066	.019	.126	.064	.018	.122	.062	.018		
9.0	.133	.064	.018	.131	.064	.018	.126	.062	.018	.121	.061	.017	.117	.060	.017		
10.0	.128	.061	.017	.125	.061	.017	.121	.059	.017	.117	.058	.017	.113	.057	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.180	.165	.151	.154	.141	.130	.105	.097	.090	.061	.056	.052	.019	.018	.017	
2.0	.165	.140	.119	.142	.121	.103	.097	.083	.072	.056	.049	.042	.018	.016	.014	
3.0	.154	.121	.095	.132	.105	.083	.091	.073	.058	.052	.042	.034	.017	.014	.011	
4.0	.144	.107	.078	.124	.092	.068	.085	.064	.048	.049	.038	.028	.016	.012	.009	
5.0	.136	.096	.065	.117	.083	.057	.081	.058	.040	.047	.034	.024	.015	.011	.008	
6.0	.129	.086	.056	.111	.075	.049	.077	.052	.034	.044	.031	.020	.014	.010	.007	
7.0	.123	.079	.048	.106	.069	.042	.073	.048	.030	.043	.028	.018	.014	.009	.006	
8.0	.118	.073	.042	.101	.063	.037	.070	.044	.026	.041	.026	.016	.013	.009	.005	
9.0	.113	.068	.038	.097	.059	.033	.067	.041	.023	.039	.024	.014	.013	.008	.005	
10.0	.108	.064	.034	.093	.055	.030	.065	.039	.021	.038	.023	.013	.012	.008	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-08-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.1V I:0.1222A P:25.631W PF:0.9533 Freq:49.99Hz										
Lamp Flux:3354.28x1 lm										
Name: LM-7550-E12-26					Type: LED			Cover color:		
Model No:					DIM.: 1133*50mm					
MFR.:										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.7	17.7	16.9	17.9	18.1	17.1	18.1	17.3	18.3	18.5
3H	16.5	17.4	16.8	17.7	17.9	16.9	17.9	17.2	18.1	18.3
4H	16.4	17.3	16.7	17.5	17.8	16.8	17.7	17.1	18.0	18.2
6H	16.3	17.1	16.6	17.4	17.7	16.7	17.6	17.1	17.8	18.1
8H	16.3	17.1	16.6	17.3	17.6	16.7	17.5	17.0	17.8	18.0
12H	16.2	17.0	16.6	17.3	17.6	16.6	17.4	17.0	17.7	18.0
4H 2H	16.4	17.3	16.7	17.5	17.8	16.8	17.7	17.1	17.9	18.2
3H	16.2	17.0	16.6	17.3	17.6	16.6	17.4	17.0	17.7	18.0
4H	16.1	16.8	16.5	17.1	17.5	16.5	17.2	16.9	17.6	17.9
6H	16.0	16.6	16.4	17.0	17.4	16.5	17.1	16.8	17.4	17.8
8H	16.0	16.6	16.4	16.9	17.3	16.4	17.0	16.8	17.3	17.7
12H	15.9	16.5	16.4	16.8	17.3	16.4	16.9	16.8	17.3	17.7
8H 4H	16.0	16.5	16.4	16.9	17.3	16.4	17.0	16.8	17.3	17.7
6H	15.9	16.3	16.3	16.8	17.2	16.3	16.8	16.7	17.2	17.6
8H	15.8	16.2	16.3	16.7	17.1	16.3	16.7	16.7	17.1	17.6
12H	15.8	16.1	16.3	16.6	17.1	16.2	16.6	16.7	17.0	17.5
12H 4H	15.9	16.5	16.4	16.8	17.3	16.3	16.9	16.8	17.2	17.7
6H	15.8	16.2	16.3	16.7	17.1	16.3	16.7	16.7	17.1	17.6
8H	15.8	16.1	16.3	16.6	17.1	16.2	16.5	16.7	17.0	17.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.0 / -17.5					+ 2.8 / -15.8				
1.5H	+ 4.3 / -15.5					+ 4.0 / -13.0				
2.0H	+ 6.8 / -10.4					+ 6.7 / -11.6				

CIE Pub.117, 3354 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.2)
Area: 0.056 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-08-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.1V I:0.1222A P:25.631W PF:0.9533 Freq:49.99Hz Lamp Flux:3354.28x1 lm		
Name: LM-7550-E12-26	Type: LED	Cover color:
Model No:	DIM.: 1133*50mm	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	82	75	70	81	74	70	80	74	70	66
0.80	90	83	79	89	83	79	88	82	79	74
1.00	96	89	85	95	89	85	93	89	84	80
1.25	100	95	91	99	94	90	97	93	89	85
1.50	104	98	94	102	97	94	100	96	93	88
2.00	107	102	99	105	101	98	102	99	96	91
2.50	109	104	101	107	103	100	104	101	98	92
3.00	110	107	104	109	105	103	105	102	100	93
4.00	113	109	107	110	108	106	107	104	103	95
5.00	114	111	109	112	109	107	107	106	104	96
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-08-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.1V I:0.1222A P:25.631W PF:0.9533 Freq:49.99Hz Lamp Flux:3354.28x1 lm		
Name: LM-7550-E12-26	Type: LED	Cover color:
Model No:	DIM.: 1133*50mm	
MFR.:		

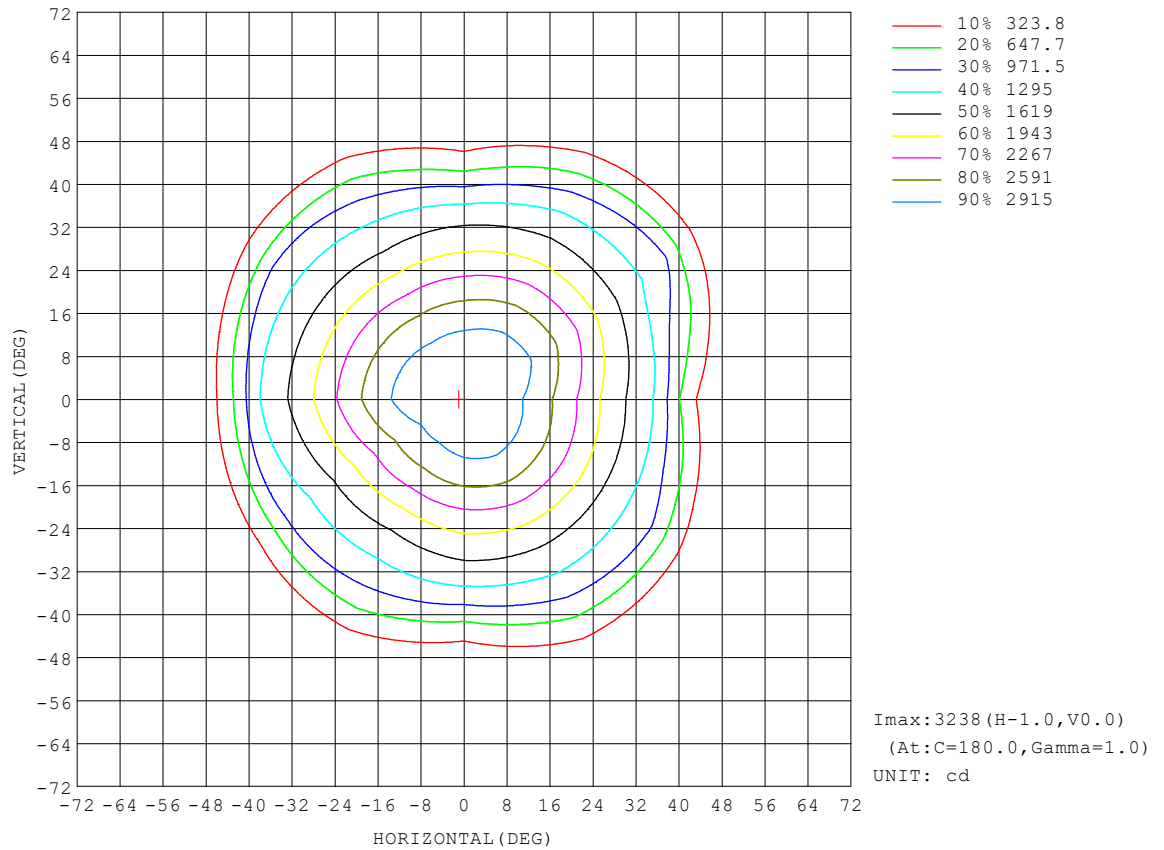


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-08-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

AAI Figure

Test:U:220.1V I:0.1222A P:25.631W PF:0.9533 Freq:49.99Hz Lamp Flux:3354.28x1 lm		
Name: LM-7550-E12-26	Type: LED	Cover color:
Model No:	DIM.: 1133*50mm	
MFR.:		

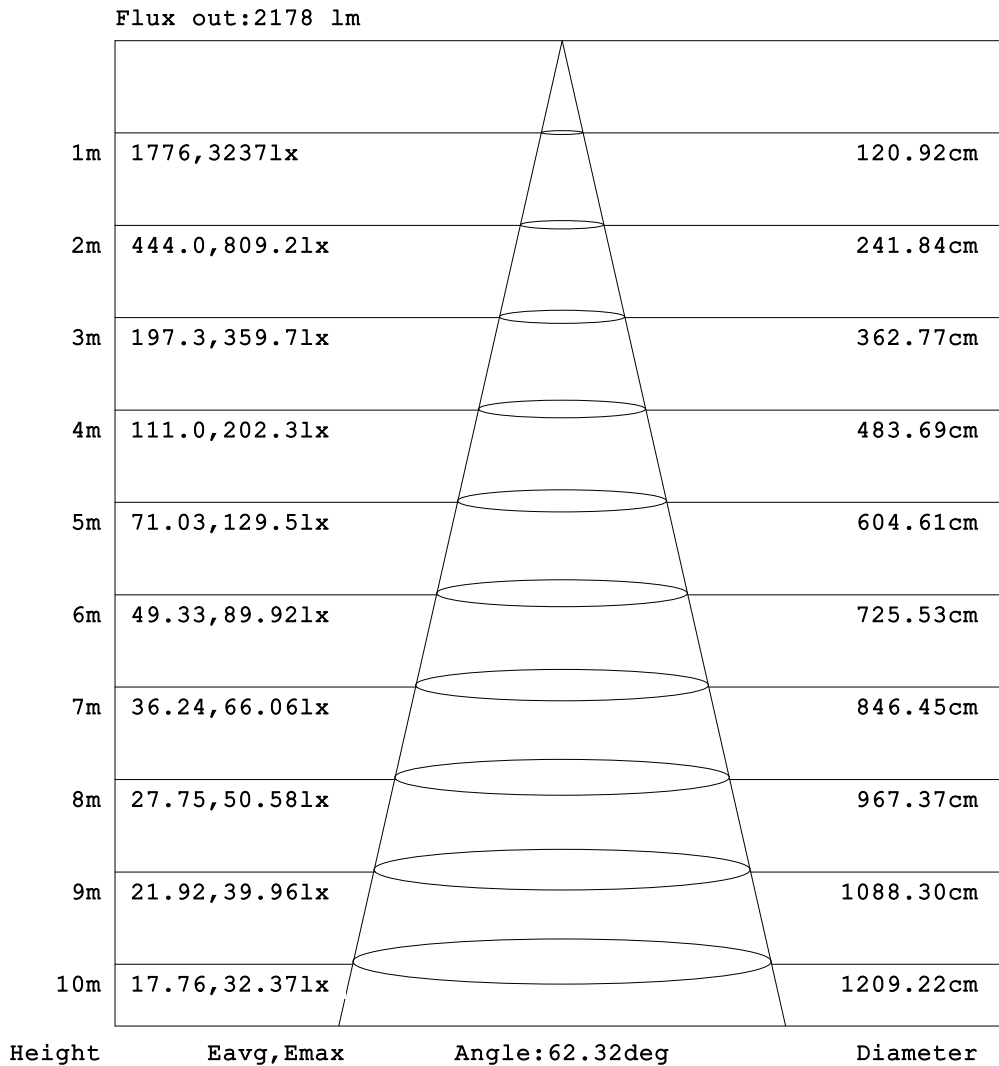


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-08-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

ISOLUX DIAGRAM


Test:U:220.1V I:0.1222A P:25.631W PF:0.9533 Freq:49.99Hz Lamp Flux:3354.28x1 lm		
Name: LM-7550-E12-26	Type: LED	Cover color:
Model No:	DIM.: 1133*50mm	
MFR.:		

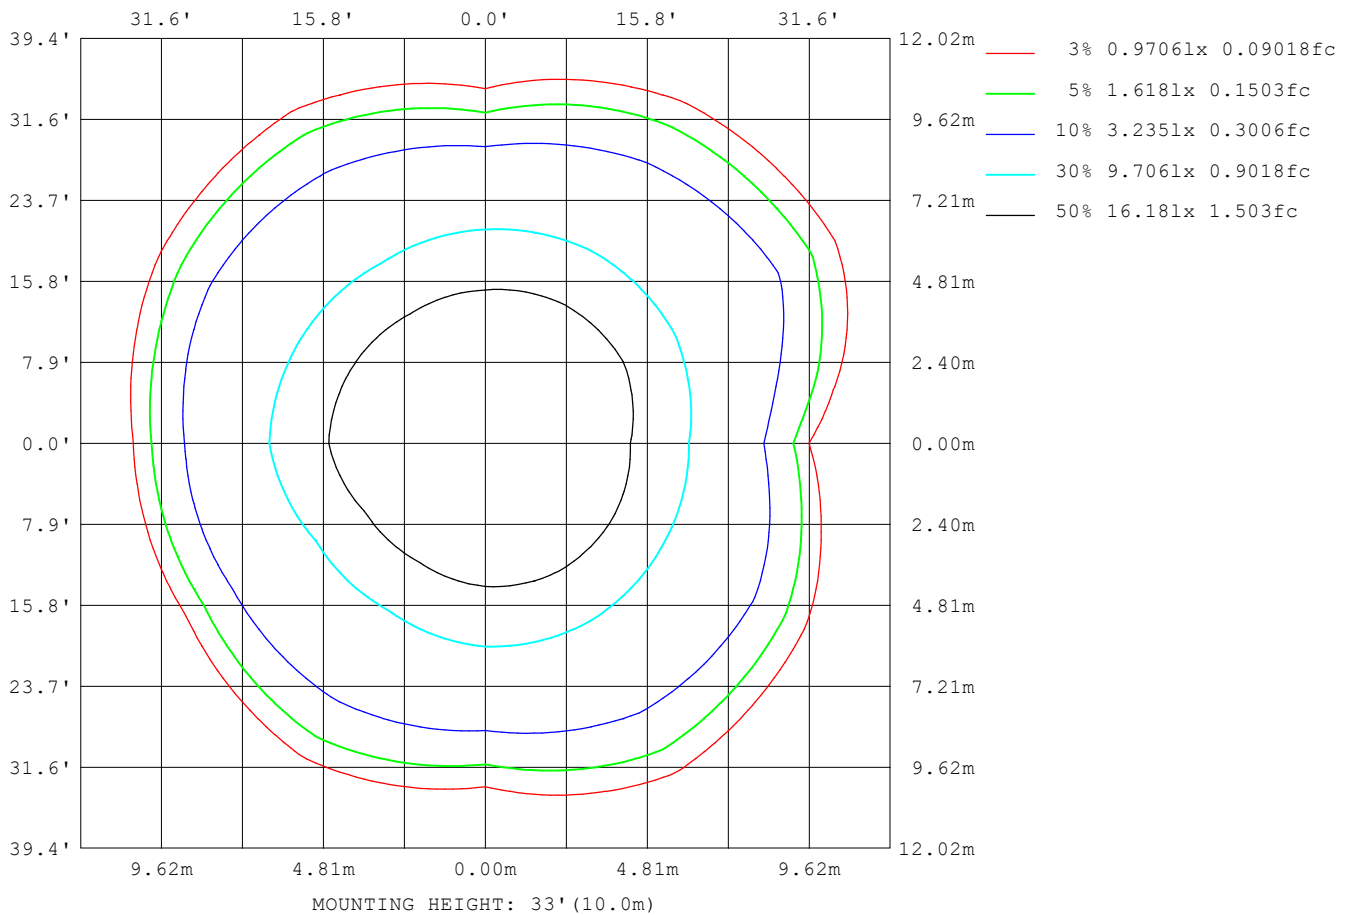

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-08-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks:

Planar Illuminance Curve

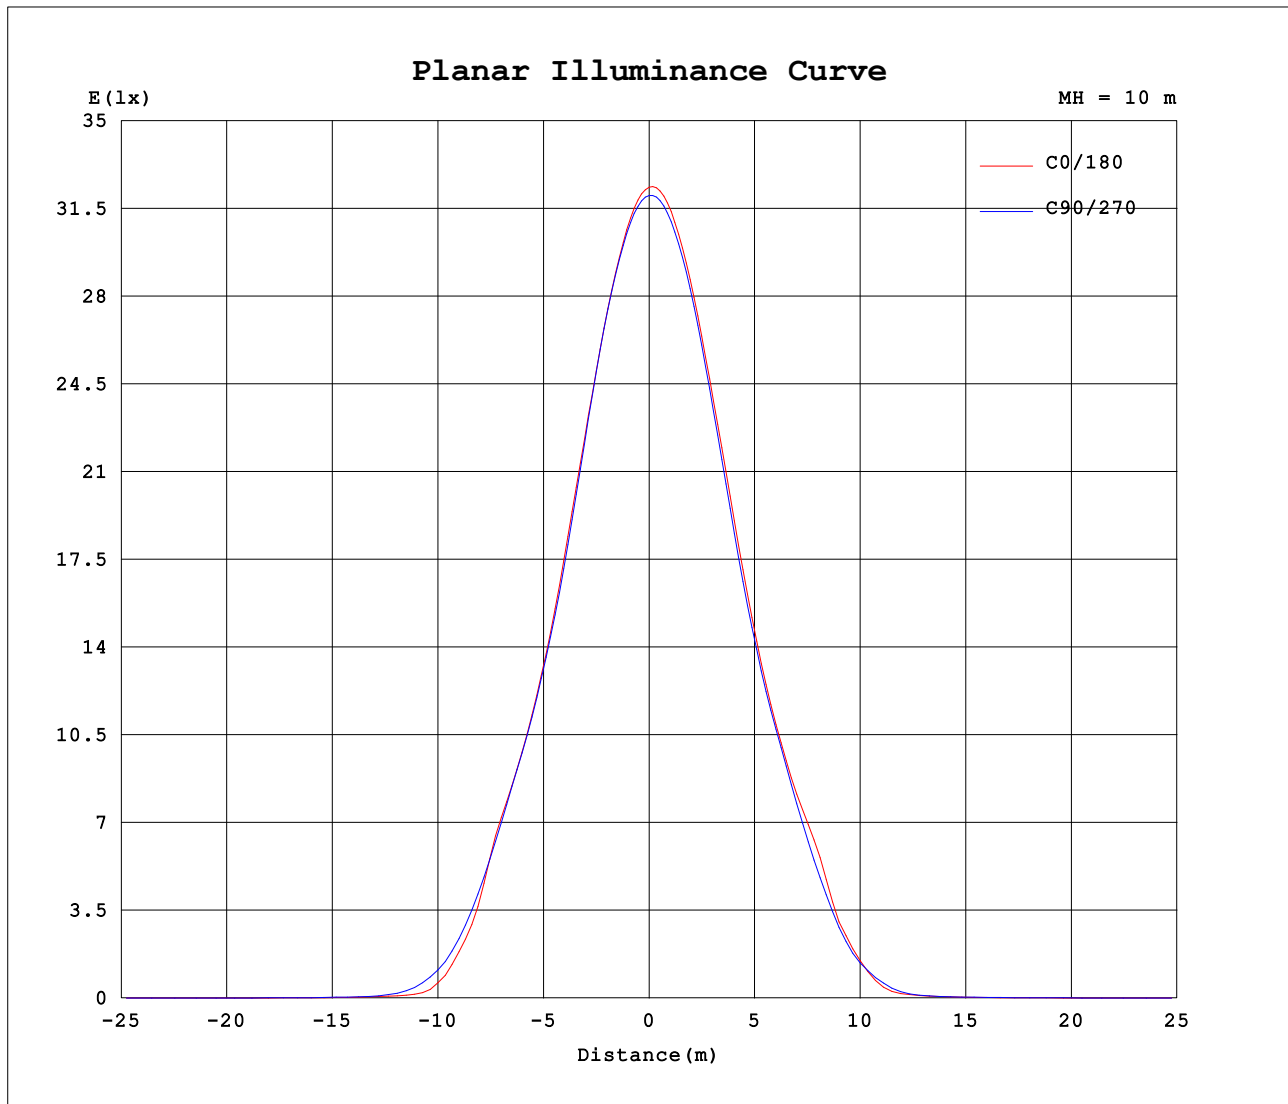

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2025-08-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.1222A P:25.631W PF:0.9533 Freq:49.99Hz Lamp Flux:3354.28x1 lm		
Name: LM-7550-E12-26	Type: LED	Cover color:
Model No:	DIM.: 1133*50mm	
MFR.:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3235	3234	3222	3202	3196	3206	3235	3234	3222	3202	3196	3206						
5	3148	3166	3169	3130	3086	3091	3209	3191	3167	3168	3197	3208						
10	2957	2991	3006	2952	2878	2879	3070	3041	3009	3032	3090	3099						
15	2681	2724	2747	2673	2576	2583	2837	2797	2756	2796	2882	2888						
20	2339	2385	2390	2299	2194	2225	2531	2477	2420	2472	2582	2589						
25	1962	2006	2002	1939	1795	1843	2166	2104	2038	2106	2218	2228						
30	1625	1641	1662	1616	1479	1511	1803	1741	1684	1768	1860	1852						
35	1311	1330	1365	1274	1207	1215	1482	1433	1387	1411	1540	1523						
40	654	1075	1038	782	878	866	1055	1171	1059	918	1195	1255						
45	174	558	616	320	476	346	424	615	660	401	757	952						
50	36.7	128	241	74.2	149	61.4	68.9	178	261	98.0	322	389						
55	18.4	22.3	46.7	25.0	26.2	16.4	30.2	27.8	54.9	30.6	75.6	51.4						
60	10.9	11.3	14.0	13.8	9.82	8.86	17.2	15.2	15.1	17.6	21.3	18.7						
65	6.53	7.17	8.30	8.80	6.56	5.80	11.7	10.9	10.9	12.5	13.5	12.3						
70	3.60	4.67	5.57	5.76	4.54	3.77	8.02	8.38	9.03	9.84	10.9	9.52						
75	2.09	3.02	3.85	3.68	3.24	2.49	6.10	6.75	7.86	8.20	9.51	7.54						
80	1.51	2.13	2.75	2.65	2.44	1.86	5.68	6.15	6.98	7.31	8.51	6.55						
85	1.31	1.73	2.18	2.29	2.14	1.62	5.96	6.22	6.61	6.96	7.92	6.39						
90	1.41	1.60	1.99	1.83	1.66	1.52	6.61	6.53	6.55	6.58	7.78	6.64						
95	1.69	1.61	1.50	1.55	1.71	1.73	7.28	6.94	6.71	6.71	7.78	7.08						
100	2.03	1.91	1.79	1.85	2.03	2.05	7.85	7.52	7.25	7.25	8.23	7.70						
105	2.39	2.24	2.11	2.15	2.35	2.39	8.35	8.03	7.69	7.66	8.03	8.25						
110	2.74	2.57	2.42	2.44	2.67	2.72	8.77	8.39	8.03	7.96	8.28	8.64						
115	3.06	2.90	2.73	2.73	2.96	3.03	9.03	8.62	8.24	8.14	8.48	8.89						
120	3.34	3.18	3.00	2.99	3.22	3.31	9.07	8.69	8.31	8.23	8.55	8.96						
125	3.60	3.44	3.22	3.22	3.45	3.56	8.88	8.59	8.26	8.20	8.49	8.85						
130	3.81	3.65	3.41	3.40	3.64	3.76	8.57	8.36	8.11	8.08	8.30	8.60						
135	3.95	3.78	3.55	3.54	3.79	3.87	8.16	8.01	7.84	7.84	8.02	8.22						
140	4.00	3.83	3.62	3.62	3.87	3.94	7.64	7.56	7.48	7.49	7.64	7.74						
145	4.01	3.83	3.62	3.66	3.89	3.97	7.08	7.08	7.05	7.08	7.19	7.19						
150	4.00	3.78	3.59	3.65	3.86	3.95	6.51	6.53	6.54	6.60	6.69	6.60						
155	3.95	3.72	3.54	3.60	3.80	3.87	5.90	5.95	6.01	6.09	6.15	5.97						
160	3.85	3.66	3.49	3.54	3.73	3.78	5.36	5.37	5.46	5.57	5.59	5.37						
165	3.75	3.60	3.46	3.49	3.67	3.79	4.83	4.81	4.93	5.06	5.10	4.85						
170	3.73	3.58	3.47	3.47	3.61	3.76	4.20	4.30	4.46	4.59	4.66	4.39						
175	3.75	3.62	3.54	3.55	3.73	3.77	3.78	3.89	4.08	4.16	4.27	3.97						
180	3.67	3.66	3.72	3.82	3.93	3.76	3.68	3.64	3.77	3.80	3.96	3.72						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2025-08-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: