


**Outdoor 18pcs 18W
RGBWA UV 6in1 Pixel Led Wall Wash**



USER MANUAL

1. Illustration:

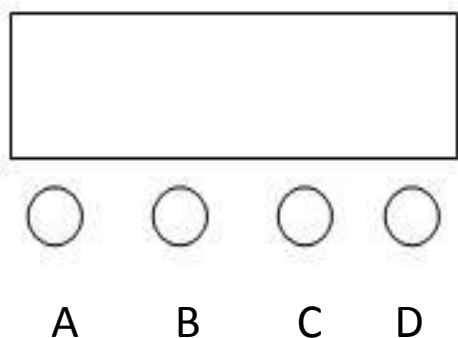

- A. Function key
- B. Add key
- C. Key reduction
- D. Confirm key
- E. LED display window

Operation instructions: press the function key a to cycle out 9 different function effects. The first two digits of the nixie tube represent the current function (refer to the menu). The last two digits represent the position of this function Address code Or parameters of speed and. Press B or C to modify the parameter value. Press D to confirm.

2. LED Display window function cross reference table,

Serial number	display	Function description
1	A001	Address code, (001-512) B. C key plus or minus address code value
2	6ch/11ch/29ch/36ch/ 119ch/108ch	Channel selection (6/11/29/36/119/108 channels) B. C key addition and subtraction
3	FF99	Running jump change, (00-12)
4	EE99	Running fade change, (00-99)
5	Tr01	Colorful gradient, (01-99)
6	To90	RGB Running Speed
7	UA04	Colorful voice control change
8	Uo99	sensitivity of sound
9	R255	Red color selection, (000-255)
10	G255	Green color selection, (000-255)
11	B255	Blue color selection, (000-255)
12	O255	White color selection, (000-255)
13	Y255	Amber color selection, (000-255)
14	P255	UV color selection, (000-255)

3. DMX512

6 Channels

Channel	Function	Value
1	Red Dimmer	001-255
2	Green Dimmer	001-255
3	Blue Dimmer	001-255
4	White Dimmer	001-255

5	Amber Dimmer	001-255
6	Purple Dimmer	001-255

11 Channels

Channel	Function	Value
1	Dimmer	001-255
2	Strobe	001-255
3	Function	001-255
4	Function Speed	001-255
5	Back color	Color select (1-37)
6	Red Dimmer	001-255
7	Green Dimmer	001-255
8	Blue Dimmer	001-255
9	White Dimmer	001-255
10	Amber Dimmer	001-255
11	Purple Dimmer	001-255

29 Channels

Channel	Function	Value
1	Dimmer	001-255
2	Strobe	001-255
3	Function	001-255
4	Function Speed	001-255
5	Back color	Color select (1-37)
6	Red Dimmer	001-255
7	Green Dimmer	001-255
8	Blue Dimmer	001-255
9	White Dimmer	001-255
10	Amber Dimmer	001-255
11	Purple Dimmer	001-255
12	Led1 Dimmer	001-255
.....		
29	Led18 Dimmer	001-255

36 Channels

Channel	Function	Value
1	Dimmer	001-255
2	Strobe	001-255
3	Red Dimmer	001-255
4	Green Dimmer	001-255
5	Blue Dimmer	001-255
6	White Dimmer	001-255
7	Amber Dimmer	001-255
8	Purple Dimmer	001-255
9	FDimmer	001-255
10	FStrobe	001-255
11	FRed Dimmer	001-255
12	FGreen Dimmer	001-255
13	FBlue Dimmer	001-255
14	FWhite Dimmer	001-255
15	FAmber Dimmer	001-255
16	FPurple Dimmer	001-255
17	Function Speed	001-255
18	Back color	Color select (1-37)
19	Led1 Dimmer	001-255
20	Led2 Dimmer	001-255
.....		
35	Led17 Dimmer	001-255
36	Led18 Dimmer	001-255

119 Channels

Channel	Function	Value
1	Dimmer	001-255
2	Strobe	001-255
3	Function	001-255
4	Function Speed	001-255
5	Back color	Color select (1-37)
6	Red Dimmer	001-255
7	Green Dimmer	001-255
8	Blue Dimmer	001-255
9	White Dimmer	001-255
10	Amber Dimmer	001-255
11	Purple Dimmer	001-255
12	R1 Dimmer	001-255
13	G1 Dimmer	001-255
14	B1 Dimmer	001-255

15	W1 Dimmer	001-255
16	Y1 Dimmer	001-255
17	P1 Dimmer	001-255
.....		
114	R18 Dimmer	001-255
115	G18 Dimmer	001-255
116	B18 Dimmer	001-255
117	W18 Dimmer	001-255
118	Y18 Dimmer	001-255
119	P18 Dimmer	001-255

108 Channels

Channel	Function	Value
1	R1 Dimmer	001-255
2	G1 Dimmer	001-255
3	B1 Dimmer	001-255
4	W1 Dimmer	001-255
5	Y1 Dimmer	001-255
6	P1 Dimmer	001-255
.....		
103	R18 Dimmer	001-255
104	G18 Dimmer	001-255
105	B18 Dimmer	001-255
106	W18 Dimmer	001-255
107	Y18 Dimmer	001-255
108	P18 Dimmer	001-255

4. Technical parameters:

Voltage: AC100~240V 50/60HZ

Power: 130W

Beads: 18 6-in-1 LED beads

Control mode: DMX512, self-propelled, master-slave, with RDM function.

Channels: 6ch/11ch/29ch/36ch/119ch/108ch

Dimming: 32bit 0-100% linear dimming

Features: Dyeing+Flash+Wall Wash Light

Working temperature: -30°C~50°C

Strobe frequency: 1-30Hz

Appearance: Metal, black

Connection method: DMX512 input/output/power input/output.

IP level: IP65