


LED Windmill Light


User Manual

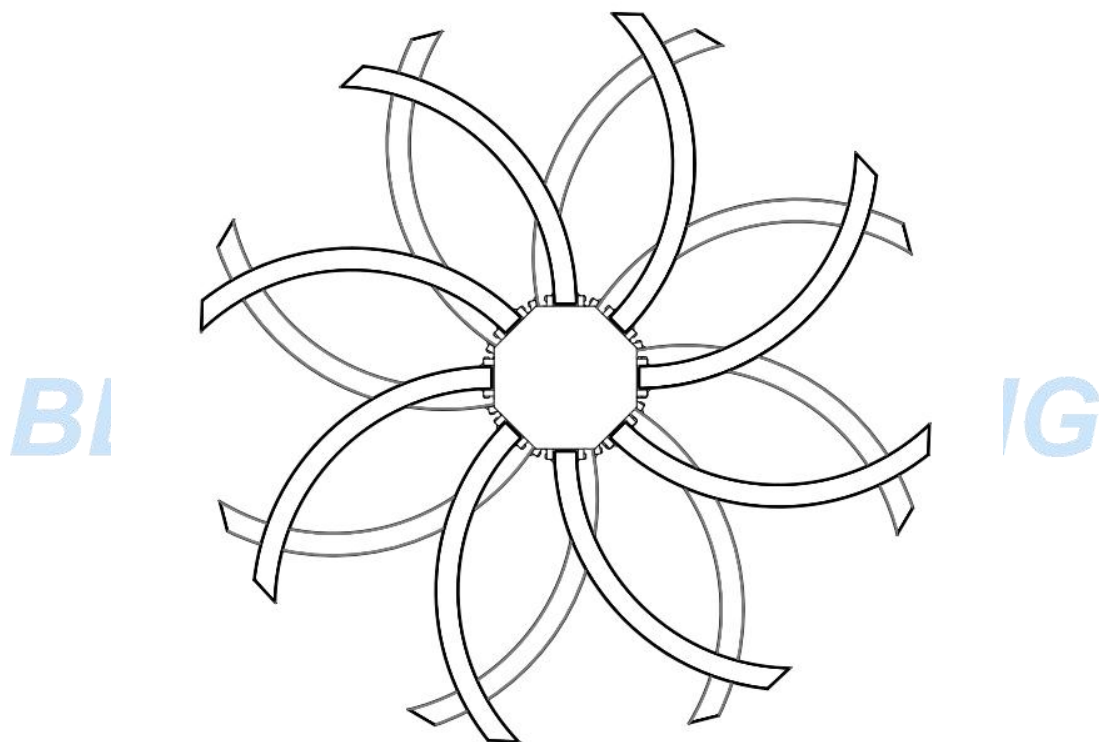

Please read this manual carefully before use

Light Bar Installation Instructions

Pay attention to the arc direction of the A and B layer light strips

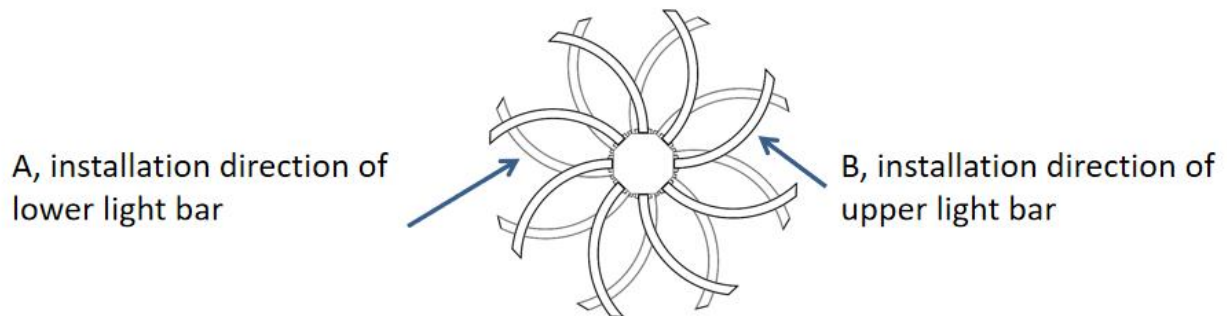

The pin socket of the light bar must be inserted accurately into the female pin socket of the lamp body



Lamp body socket



Light bar pin socket



Insert the pin socket of the light bar accurately into the female pin socket of the lamp body, then hook the buckle ring on the hook of the lamp body, press down the side safety device of the buckle to pop out

Display interface

Addr	A001-A512	512 address setting
CH	21CH	21 channel settings
	79CH	79 channel settings
SL	Auto	Host self-propelled mode
	Soun	Host voice control mode
	SL 1	Console Mode
SH	SH 0-17	Self-propelled effect
SPed	0-101	LED self-propelled speed
S E	0-99	Voice control sensitivity adjustment
Led	OFF	Screen turns off after 5 seconds
	ON	Screen always on
dISP	no	Show Inverse
	YES	Show positive
REST	YES	System Reset

21-channel mode

aisle	Function	illustrate
1	Motor 1 stepless	0-255
2	Motor 1 speed	0-255
3	Motor 2 stepless	0-255
4	Motor 2 speed	0-255
5	Total dimming	0-255
6	Strobe	0-255
7	LED1 red dimming/color selection	0-255
8	LED1 green dimming/color selection	0-255
9	LED1 blue dimming/color selection	0-255

10	LED1 self-propelled voice control effect	0-255
11	LED1 speed/sensitivity	0-255
12	LED1 background color selection	0-255
13	LED1 background dimming	0-255
14	LED2 red dimming/color selection	0-255
15	LED2 green dimming/color selection	0-255
16	LED2 blue dimming/color selection	0-255
17	LED2 self-propelled voice control effect	0-255
18	LED2 speed/sensitivity	0-255
19	LED2 background color selection	0-255
20	LED2 background dimming	0-255
21	Reset	250-255 (5 seconds)

79-channel
mode

aisle	Function	illustrate
1	Motor 1 stepless	0-255
2	Motor 1 speed	0-255
3	Motor 2 stepless	0-255
4	Motor 2 speed	0-255
5	Total dimming	0-255
6	Strobe	0-255
7	LED1 red dimming	0-255
8	LED1 green dimming	0-255
9	LED1 blue dimming	0-255
.....		
76	LED24 red dimming	0-255
77	LED24 green dimming	0-255
78	LED24 blue dimming	0-255
79	Reset	250-255 (5 seconds)