



光谱图

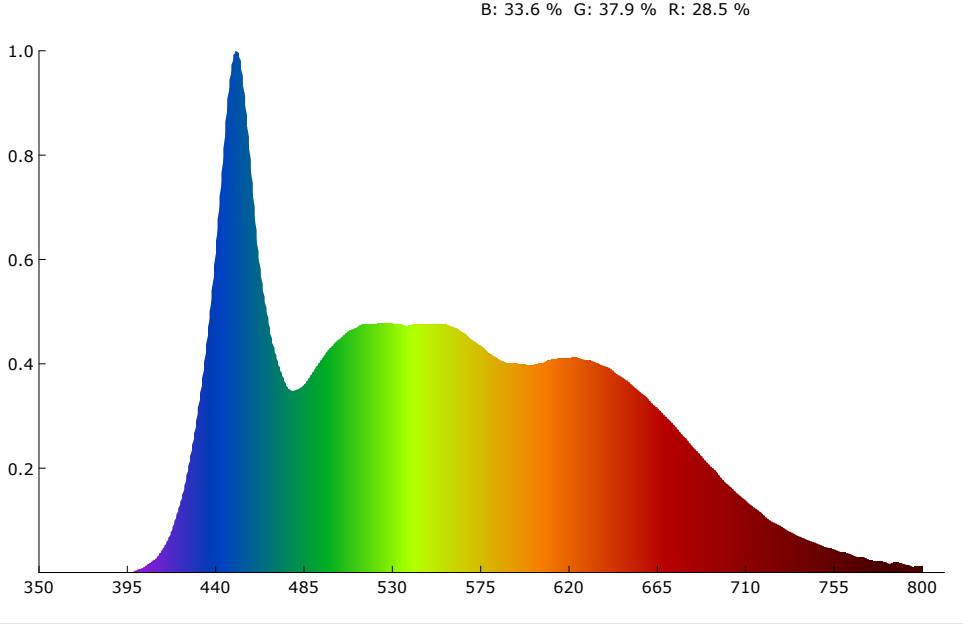

SDCM

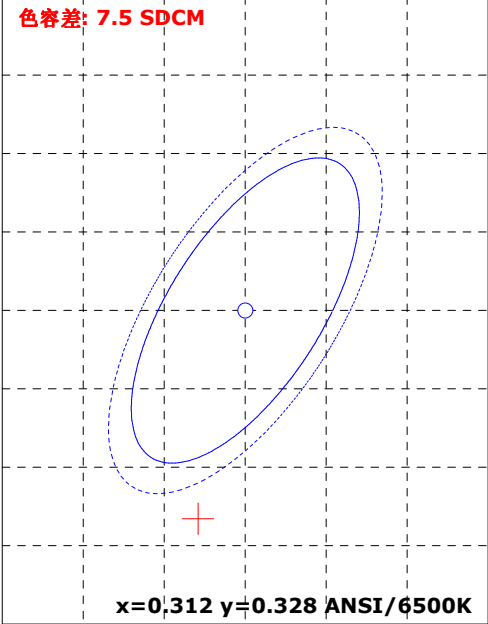

颜色参数:

坐标x: 0.3094 坐标y: 0.3149 坐标u: 0.2009 坐标v: 0.3067 坐标u': 0.2009 坐标v': 0.4600
红色比: 28.5 % 绿色比: 37.9 % 蓝色比: 33.6 % 光通量红色比: 15.2 % 光通量绿色比: 80.1 % 光通量蓝色比: 4.7 %

显色指数: 95.9 AvgR: 94.2
R1: 97.0 R2: 97.0 R3: 92.0 R4: 96.2 R5: 98.2 R6: 93.1 R7: 97.3 R8: 96.4
R9: 91.3 R10: 92.3 R11: 94.4 R12: 78.1 R13: 97.9 R14: 95.3 R15: 95.8


色温: 6834 K 光通量: 4057.992 lm 峰值波长: 450.6 nm 色容差: 7.5
明暗视觉比: 2.4 中心波长: 452.1 nm 主波长: 481.0 nm 质心波长: 554.8 nm
半宽度: 28.6 nm 色偏差: -0.00250 色纯度: 9.7 % 色质指数: 90.5
LER(TM-30): 257.4 辐射功率: 15763.6 mw 色域指数(Rg): 102.5 逼真度(Rf): 91.7
红光辐射功率: 4260.4 mw 近红辐射功率: 755.9 mw 远红辐射功率: 43.9 mw

电参数:





光效: 21.5 Lm/W 能效: 23.4 能效等级: G
电压: 221.2 V 电流: 0.894 A 功率: 188.900 W 功率因素: 0.955

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/26/14
备注:


Rf: 91.7 CCT: 6834K u': 0.2009
Rg: 102.5 LER: 257.4 Duv: -0.00250 v': 0.4600

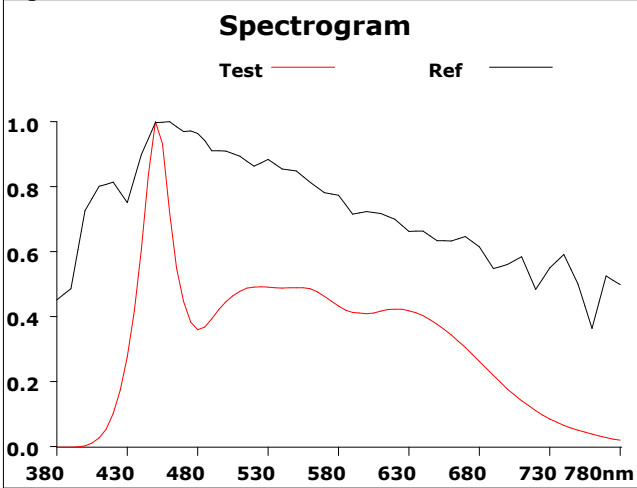


500			
Hue Bin	Rf	Chroma	Hue
1	94.5	0.1%	0.0%
2	96.0	-0.4%	1.6%
3	93.6	0.2%	2.0%
4	92.6	0.0%	2.9%
5	91.2	-1.0%	1.5%
6	95.7	1.2%	0.8%
7	97.9	-0.4%	0.5%
8	94.7	-1.2%	2.1%
9	91.4	-2.4%	6.1%
10	84.5	-0.9%	9.3%
11	80.8	1.9%	9.7%
12	90.3	2.2%	5.5%
13	91.4	5.0%	4.2%
14	85.4	11.5%	-0.0%
15	88.9	7.2%	-2.6%
16	96.4	1.2%	-0.7%

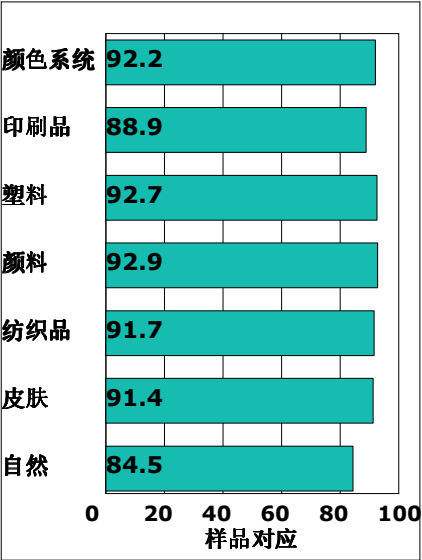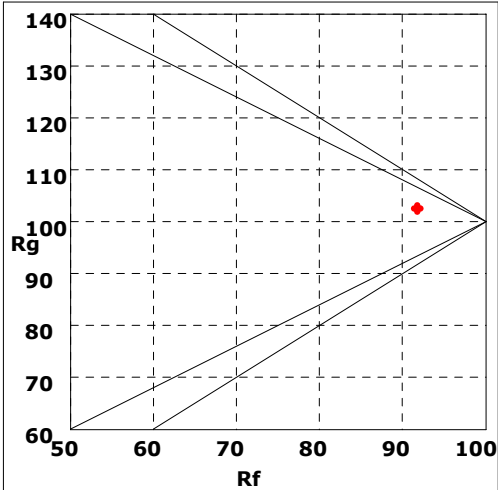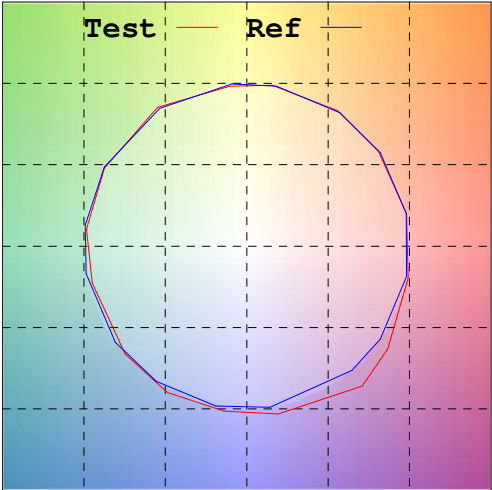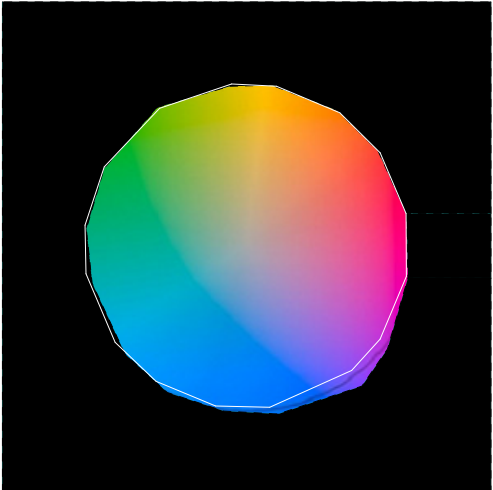

Rf by Bue

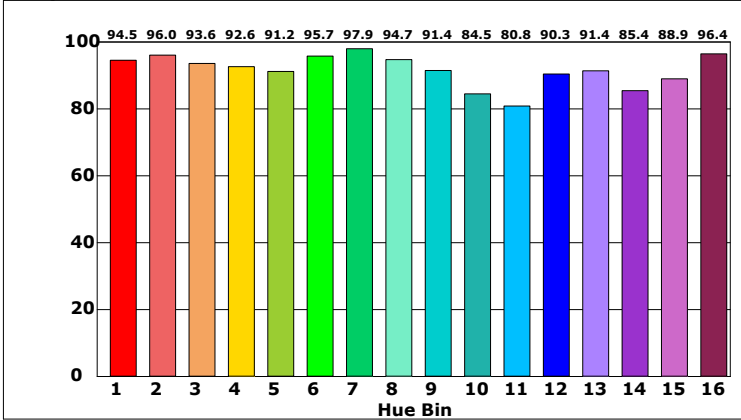

Chroma by Bue

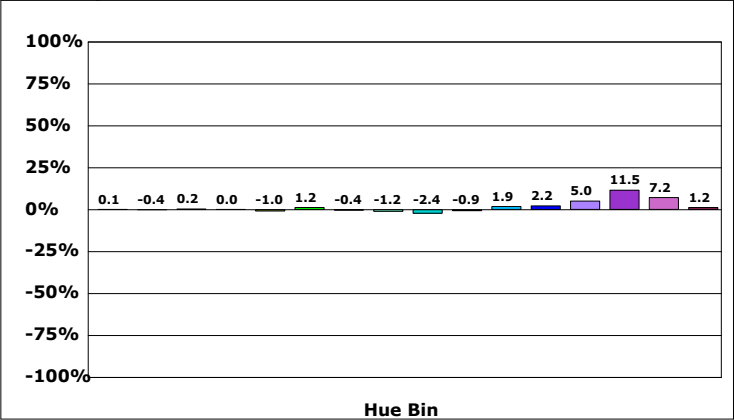

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:07/26/14

