



光谱图

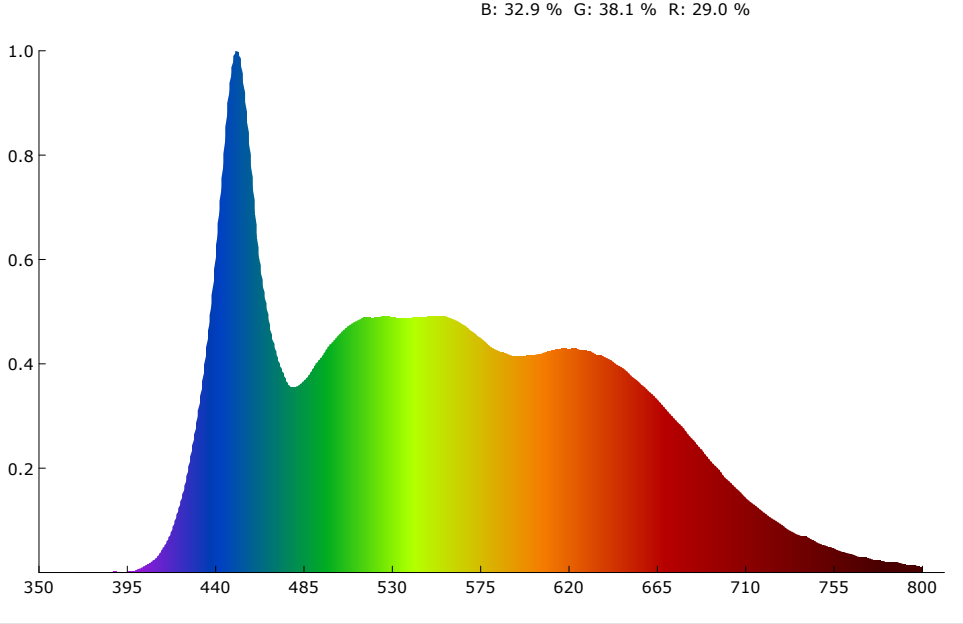

SDCM

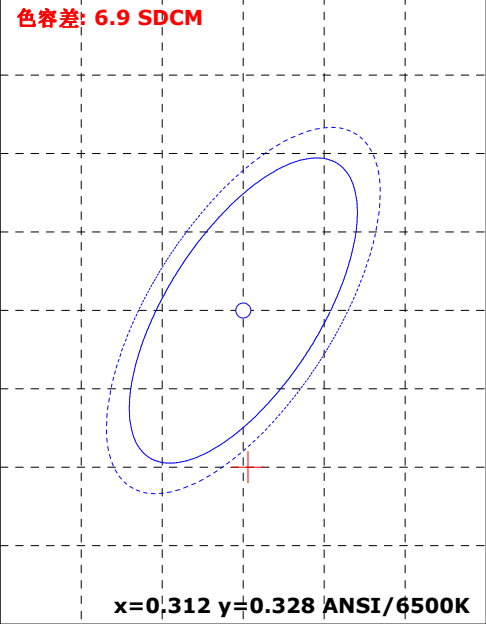

颜色参数:

坐标x: 0.3126 坐标y: 0.3182 坐标u: 0.2019 坐标v: 0.3083 坐标u': 0.2019 坐标v': 0.4624
红色比: 29.0 % 绿色比: 38.1 % 蓝色比: 32.9 % 光通量红色比: 15.4 % 光通量绿色比: 80.0 % 光通量蓝色比: 4.6 %

显色指数: 96.1 AvgR: 94.5
R1: 97.4 R2: 96.9 R3: 91.9 R4: 96.2 R5: 98.2 R6: 93.4 R7: 97.6 R8: 97.3
R9: 92.9 R10: 92.0 R11: 94.5 R12: 78.5 R13: 98.3 R14: 95.2 R15: 96.6


色温: 6598 K 光通量: 5168.416 lm 峰值波长: 450.6 nm 色容差: 6.9
明暗视觉比: 2.4 中心波长: 452.1 nm 主波长: 481.6 nm 质心波长: 556.1 nm
半宽度: 28.6 nm 色偏差: -0.00240 色纯度: 8.3 % 色质指数: 90.5
LER(TM-30): 258.9 辐射功率: 19965.1 mw 色域指数(Rg): 102.0 逼真度(Rf): 92.0
红光辐射功率: 5495.0 mw 近红辐射功率: 974.0 mw 远红辐射功率: 56.5 mw

电参数:





光效: 27.6 Lm/W 能效: 30.0 能效等级: G
电压: 221.5 V 电流: 0.886 A 功率: 187.400 W 功率因素: 0.954

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/26/14
备注:


Rf: 92.0 CCT: 6598K u': 0.2019
Rg: 102.0 LER: 258.9 Duv: -0.00240 v': 0.4624

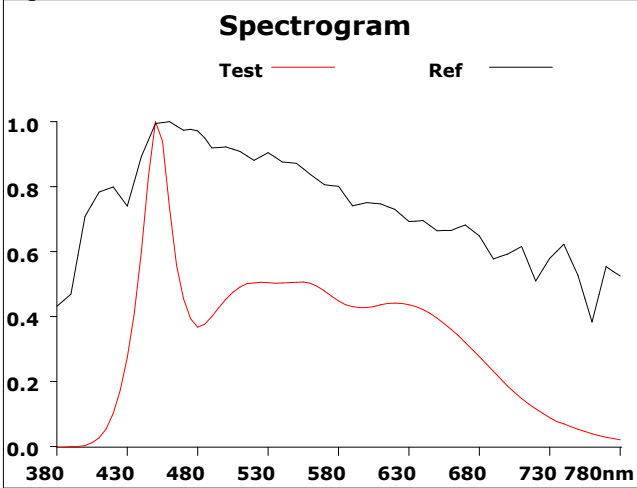


500			
Hue Bin	Rf	Chroma	Hue
1	94.7	0.0%	-0.0%
2	96.1	-0.4%	1.5%
3	93.7	0.2%	2.0%
4	92.8	-0.0%	2.8%
5	91.3	-1.0%	1.4%
6	95.8	1.1%	0.9%
7	97.5	0.2%	-0.0%
8	94.8	-1.2%	2.0%
9	91.8	-2.2%	6.0%
10	85.7	-0.9%	9.0%
11	81.6	1.9%	9.2%
12	90.7	2.2%	5.3%
13	91.7	4.9%	3.9%
14	94.3	2.3%	0.8%
15	85.8	10.9%	-5.1%
16	96.5	1.1%	-0.8%

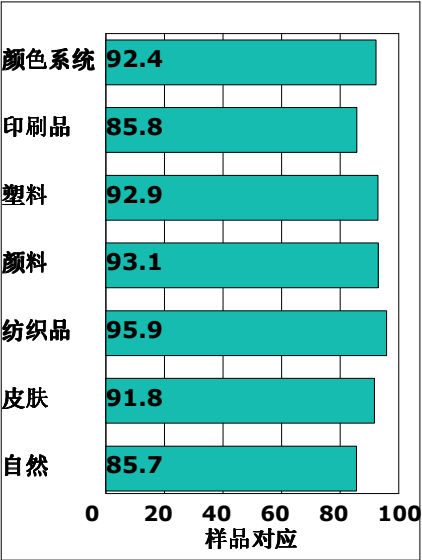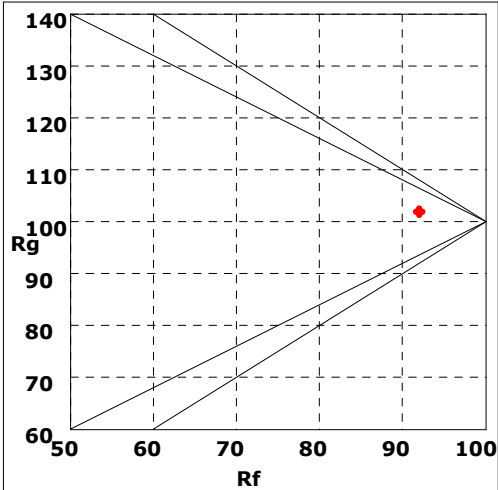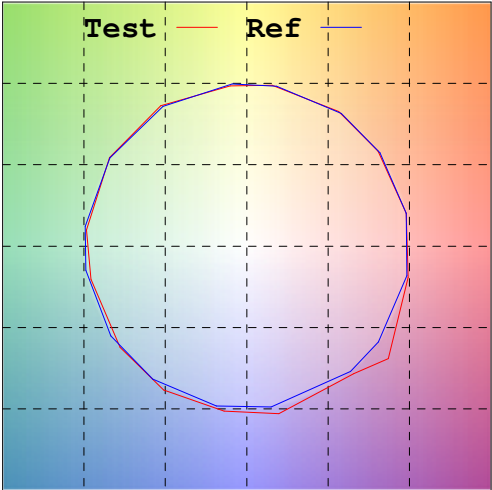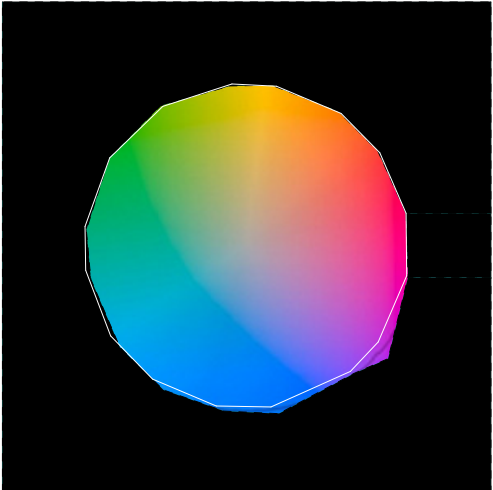

Rf by Bue

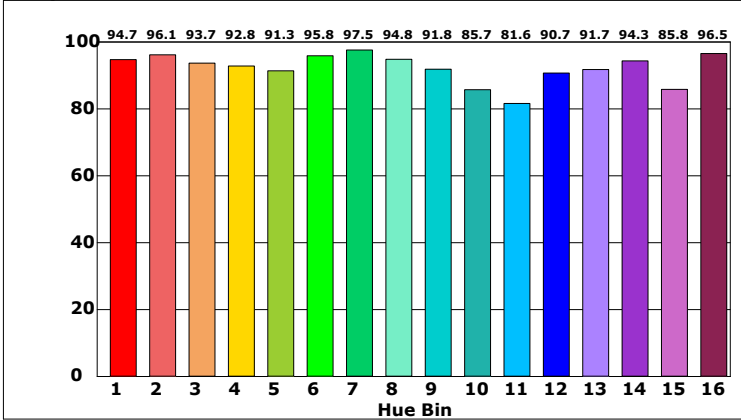

Chroma by Bue

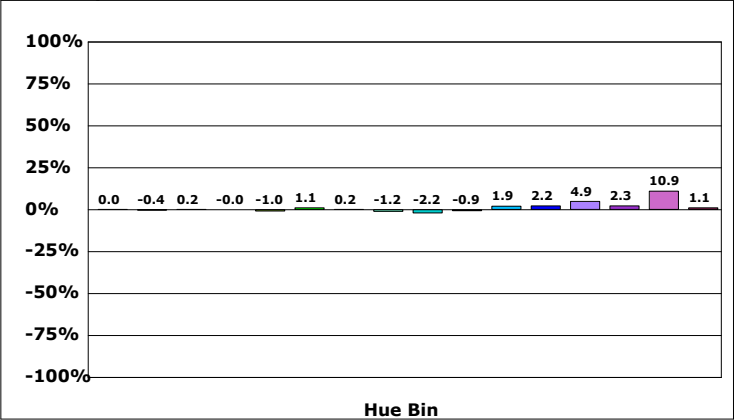

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:07/26/14

