



光谱图

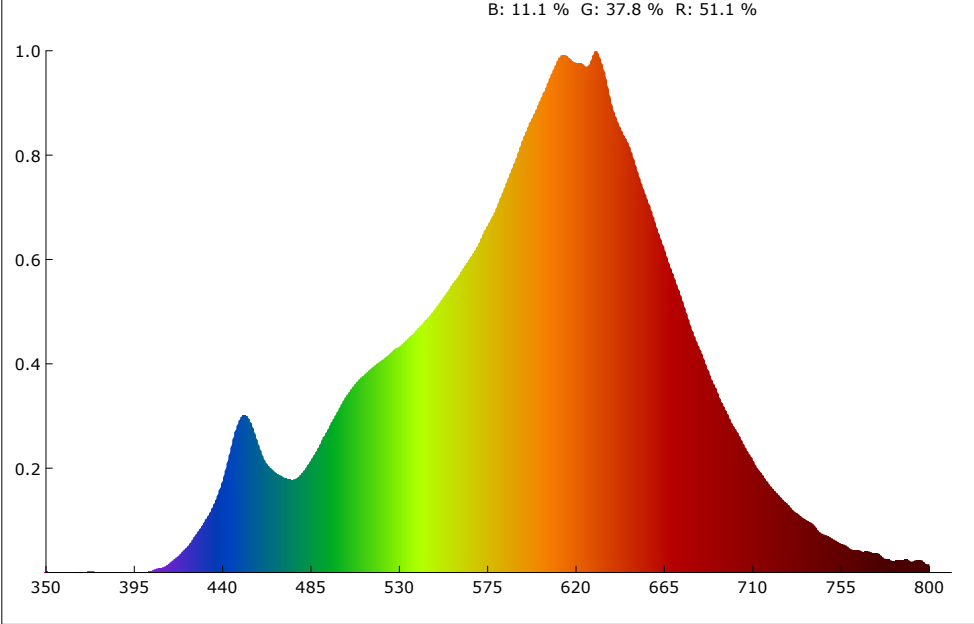

SDCM

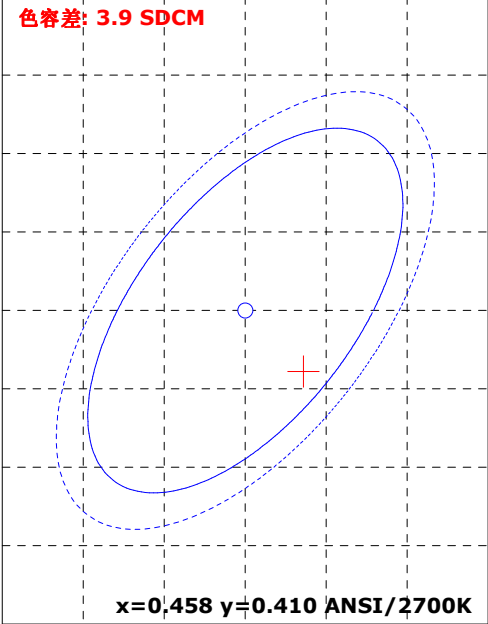

颜色参数:

坐标x: 0.4614 坐标y: 0.4062 坐标u: 0.2655 坐标v: 0.3506 坐标u': 0.2655 坐标v': 0.5259
红色比: 51.1 % 绿色比: 37.8 % 蓝色比: 11.1 % 光通量红色比: 26.3 % 光通量绿色比: 72.1 % 光通量蓝色比: 1.5 %

显色指数: 92.6 AvgR: 90.9
R1: 93.6 R2: 98.1 R3: 97.2 R4: 94.2 R5: 95.2 R6: 96.5 R7: 88.7 R8: 77.6
R9: 54.0 R10: 96.0 R11: 96.7 R12: 94.1 R13: 95.0 R14: 99.3 R15: 87.8


色温: 2643 K 光通量: 671.167 lm 峰值波长: 630.5 nm 色容差: 3.9
明暗视觉比: 1.3 中心波长: 612.0 nm 主波长: 585.1 nm 质心波长: 598.4 nm
半宽度: 127.6 nm 色偏差: -0.00175 色纯度: 60.4 % 色质指数: 87.3
LER(TM-30): 284.6 辐射功率: 2358.0 mw 色域指数(Rg): 99.9 逼真度(Rf): 91.8
红光辐射功率: 1131.6 mw 近红辐射功率: 137.5 mw 远红辐射功率: 7.4 mw

电参数:





光效: 33.6 Lm/W 能效: 36.6 能效等级: G
电压: 221.5 V 电流: 0.093 A 功率: 19.980 W 功率因素: 0.964

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/31/23
备注:


Rf: 91.8 CCT: 2643K u': 0.2655
Rg: 99.9 LER: 284.6 Duv: -0.00175 v': 0.5259

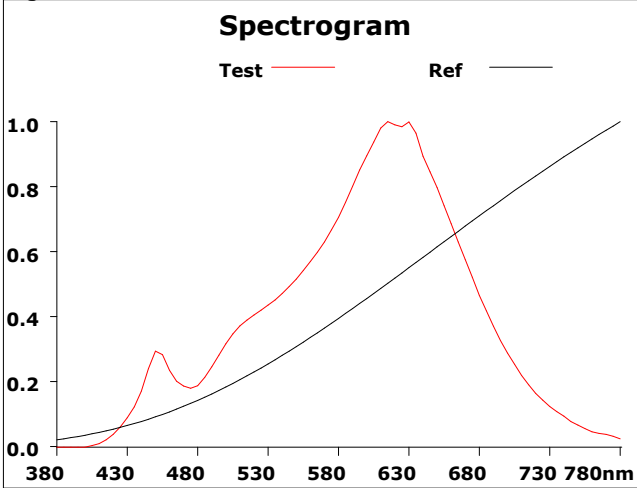


500			
Hue Bin	Rf	Chroma	Hue
1	89.1	-5.5%	-0.1%
2	90.6	-3.3%	3.5%
3	88.8	-0.7%	5.2%
4	94.2	1.0%	2.4%
5	95.9	2.3%	2.1%
6	93.6	3.5%	0.5%
7	93.5	0.3%	-3.3%
8	96.9	0.7%	-1.3%
9	96.7	-1.2%	0.1%
10	95.1	-0.4%	1.9%
11	93.8	1.0%	3.3%
12	89.0	4.3%	-2.5%
13	87.7	3.2%	-8.1%
14	85.5	2.2%	-10.7%
15	89.6	-1.6%	-5.6%
16	85.1	-4.9%	-9.1%

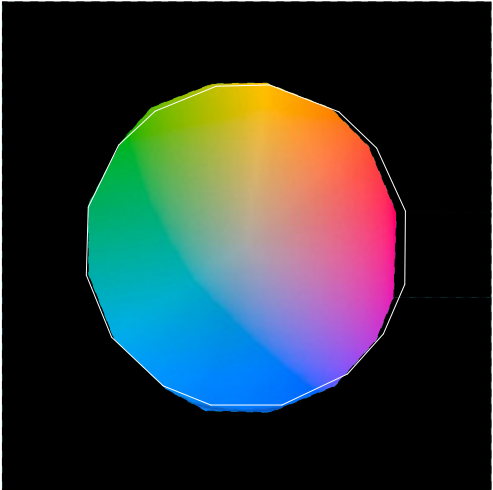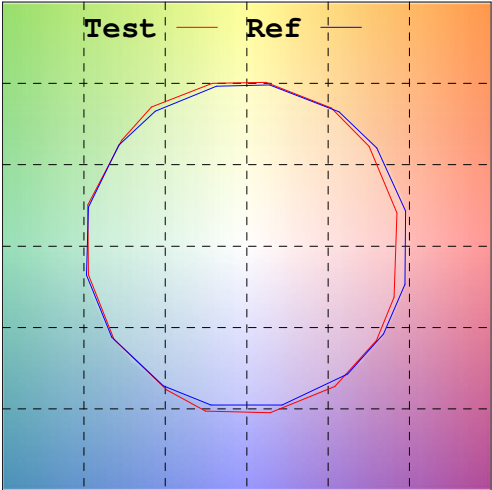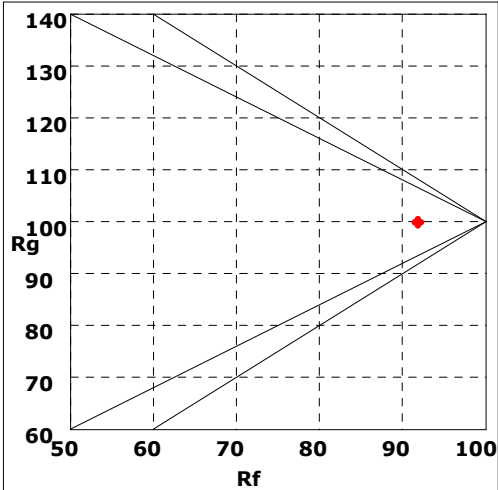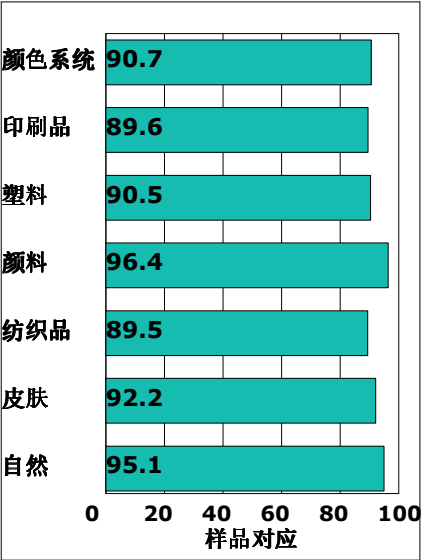

Rf by Bue



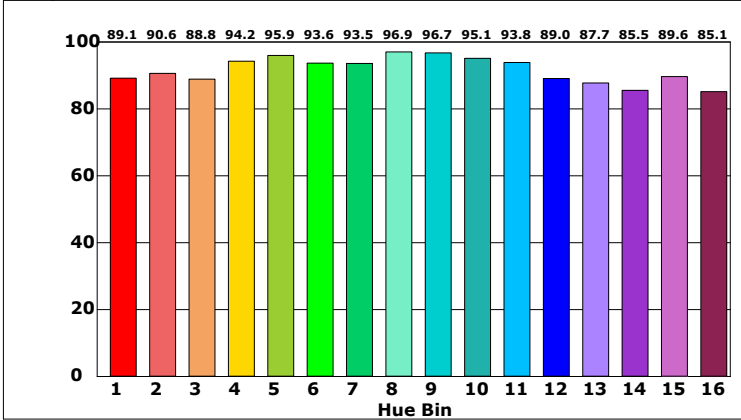


Chroma by Bue

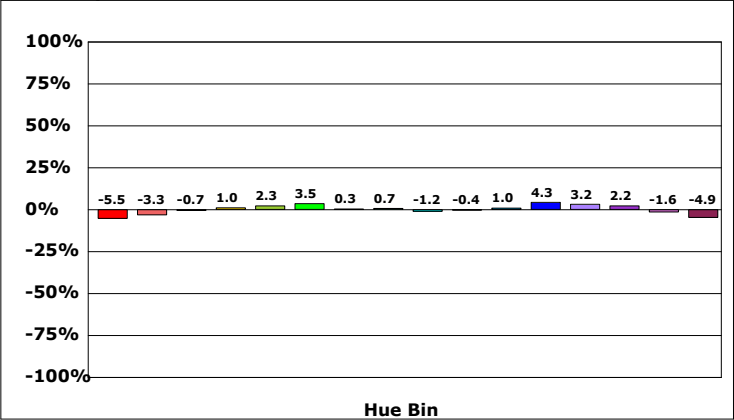

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/31/23

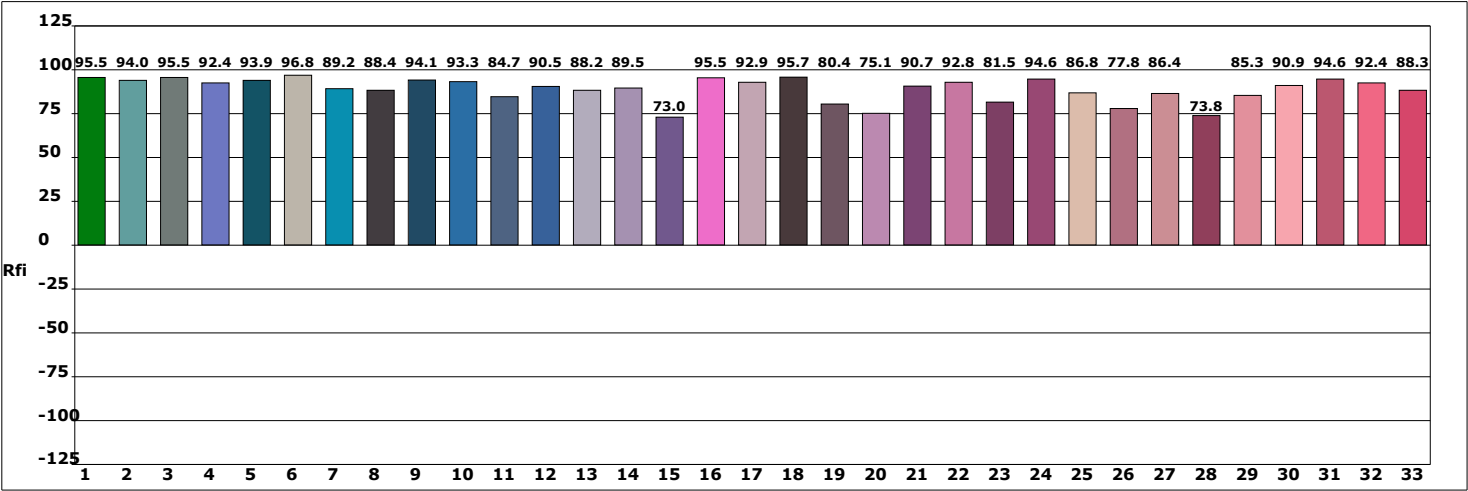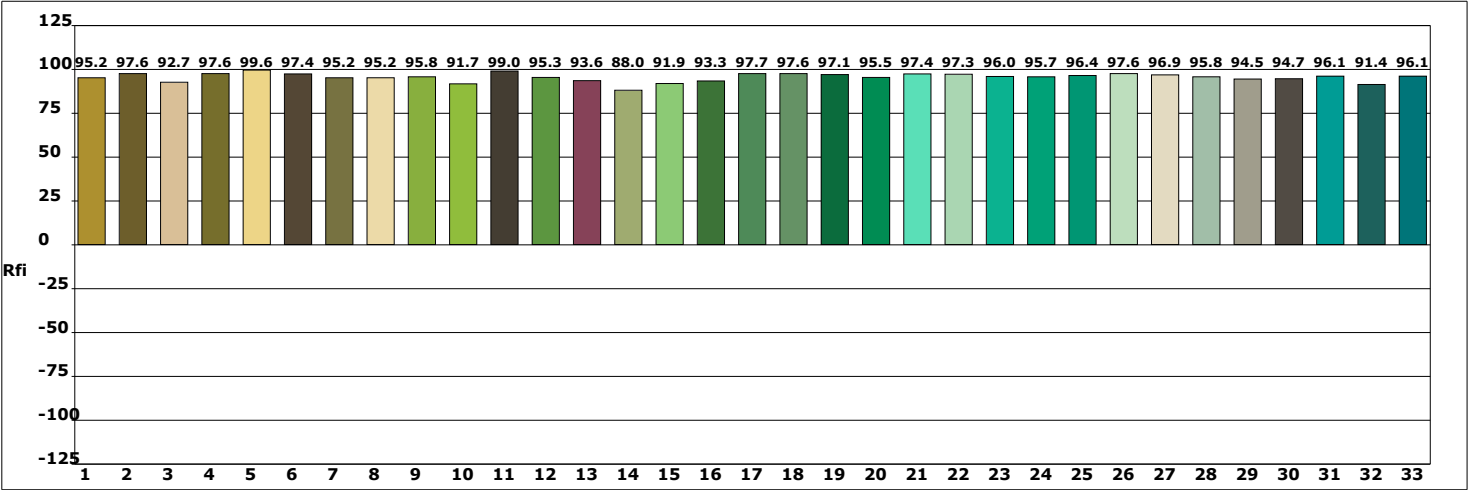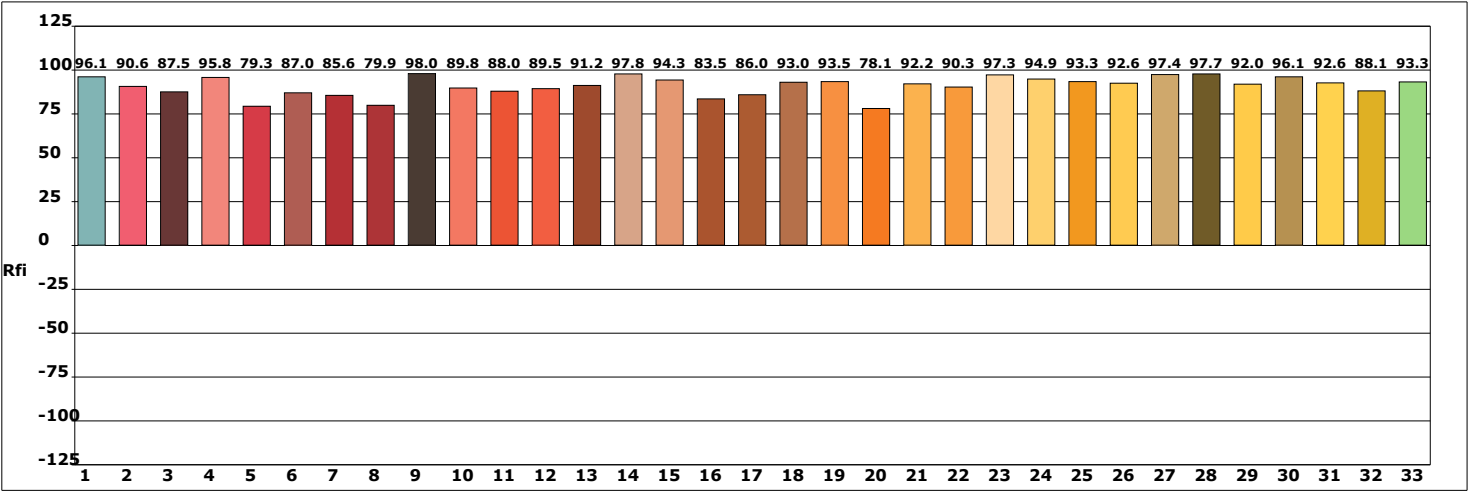

产品型号:

产品编号:

测试人员:


备注:

制造厂商:


测试单位:

测试日期:10/31/23

光谱图

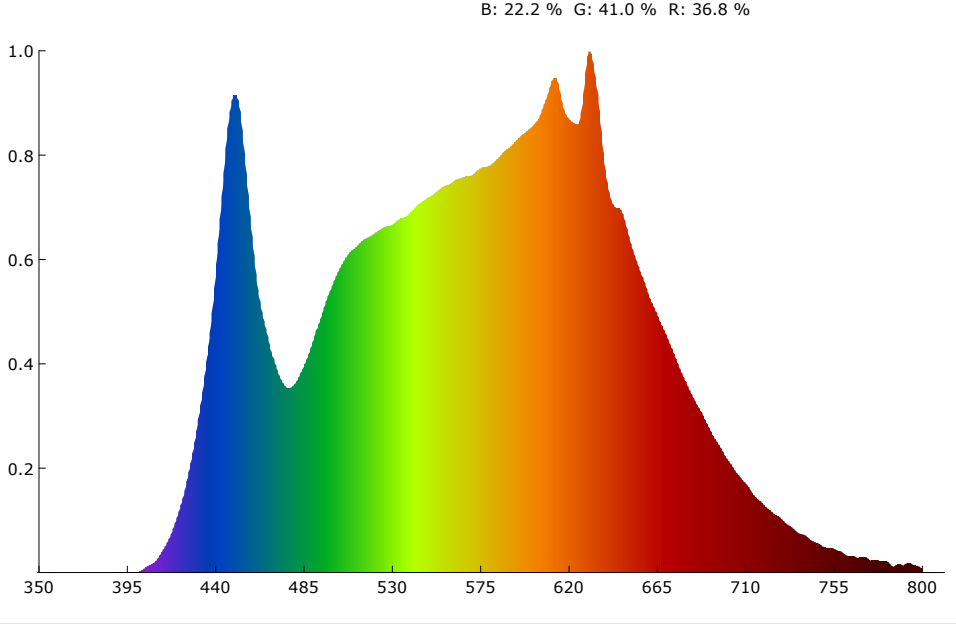

SDCM

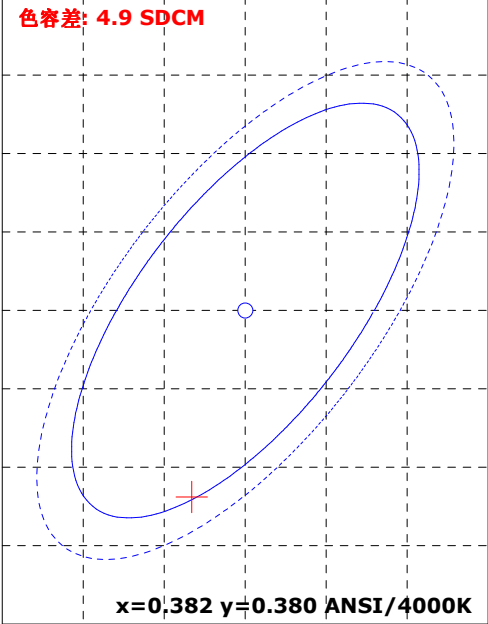

颜色参数:

坐标x: 0.3785 坐标y: 0.3678 坐标u: 0.02274 坐标v: 0.3315 坐标u': 0.02274 坐标v': 0.4972
红色比: 36.8 % 绿色比: 41.0 % 蓝色比: 22.2 % 光通量红色比: 19.8 % 光通量绿色比: 77.3 % 光通量蓝色比: 2.8 %

显色指数: 95.3 AvgR: 93.3
R1: 96.9 R2: 97.5 R3: 96.5 R4: 95.8 R5: 96.7 R6: 95.4 R7: 94.7 R8: 89.4
R9: 73.4 R10: 93.3 R11: 95.7 R12: 83.7 R13: 97.3 R14: 97.6 R15: 95.2


色温: 3987 K 光通量: 786.083 lm 峰值波长: 630.5 nm 色容差: 4.9
明暗视觉比: 1.8 中心波长: 579.4 nm 主波长: 581.4 nm 质心波长: 570.5 nm
半宽度: 169.0 nm 色偏差: -0.00369 色纯度: 24.0 % 色质指数: 87.3
LER(TM-30): 292.5 辐射功率: 2687.2 mw 色域指数(Rg): 101.2 逼真度(Rf): 92.1
红光辐射功率: 949.7 mw 近红辐射功率: 102.9 mw 远红辐射功率: 4.9 mw

电参数:





光效: 39.3 Lm/W 能效: 42.8 能效等级: G
电压: 221.4 V 电流: 0.093 A 功率: 20.010 W 功率因素: 0.964

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/31/23
备注:


Rf: 92.1 CCT: 3987K u': 0.2274
Rg: 101.2 LER: 292.5 Duv: -0.00369 v': 0.4972

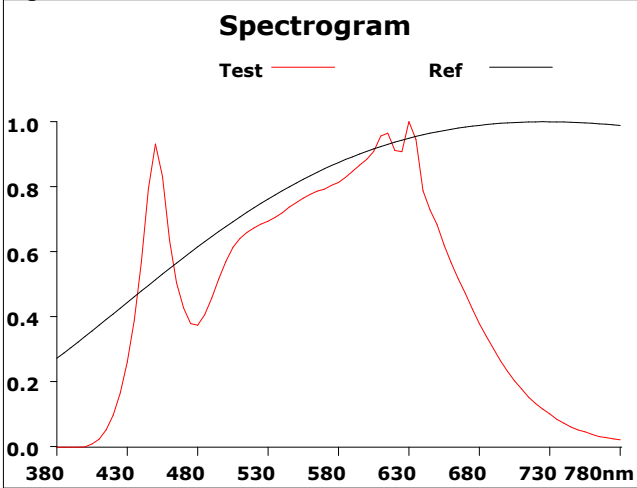


500			
Hue Bin	Rf	Chroma	Hue
1	92.5	-3.7%	-0.5%
2	94.5	-1.8%	2.0%
3	89.9	-0.7%	4.6%
4	93.8	0.2%	2.8%
5	93.0	0.6%	2.2%
6	95.0	2.9%	0.5%
7	97.0	0.4%	-0.7%
8	95.9	-0.5%	0.2%
9	94.8	-1.1%	2.6%
10	91.0	-1.9%	4.3%
11	87.0	2.6%	7.2%
12	88.5	3.9%	3.5%
13	90.6	4.8%	-3.4%
14	94.5	3.8%	-1.0%
15	89.0	1.7%	-7.3%
16	88.1	-0.1%	-6.8%

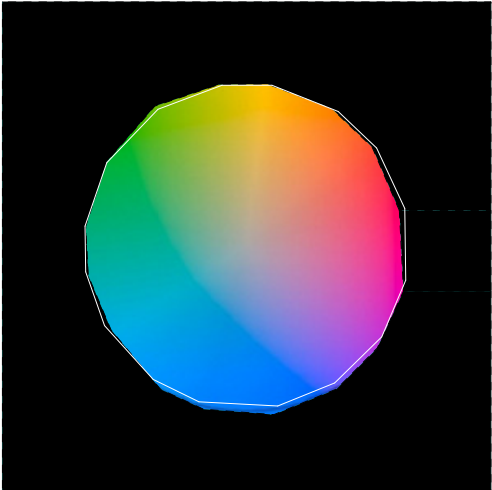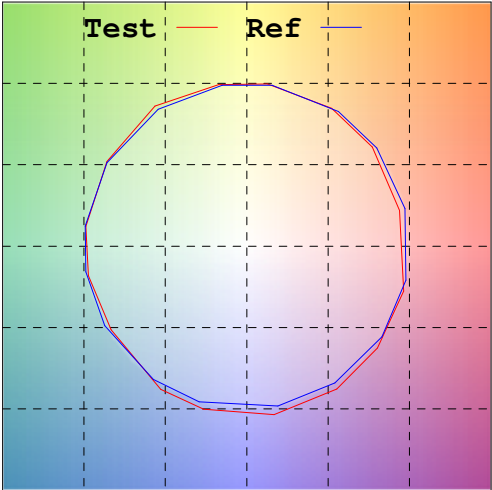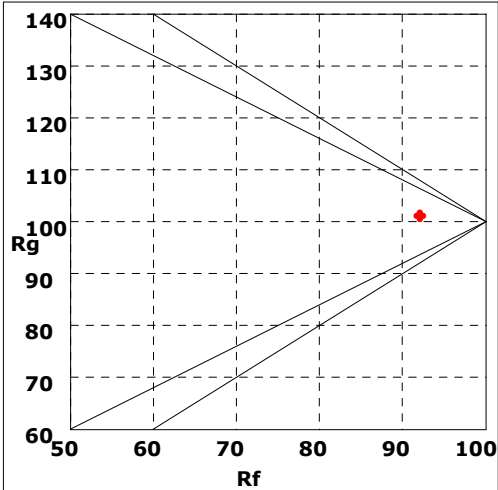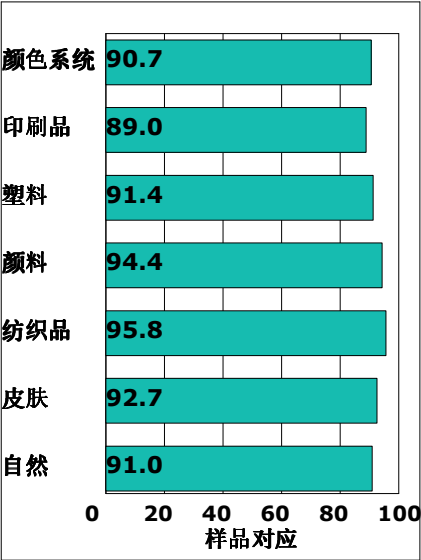




Rf by Bue

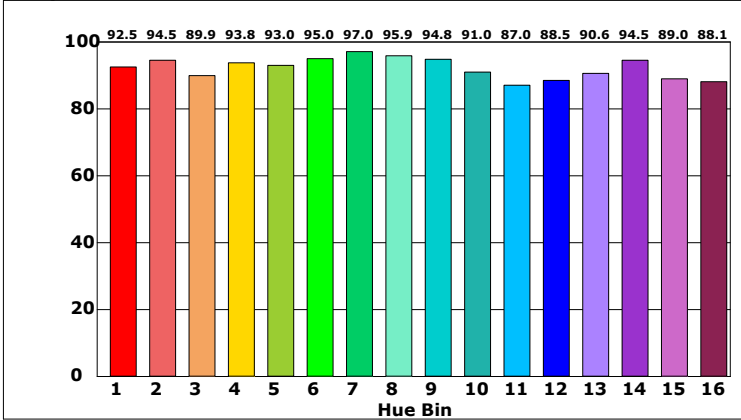

Chroma by Bue

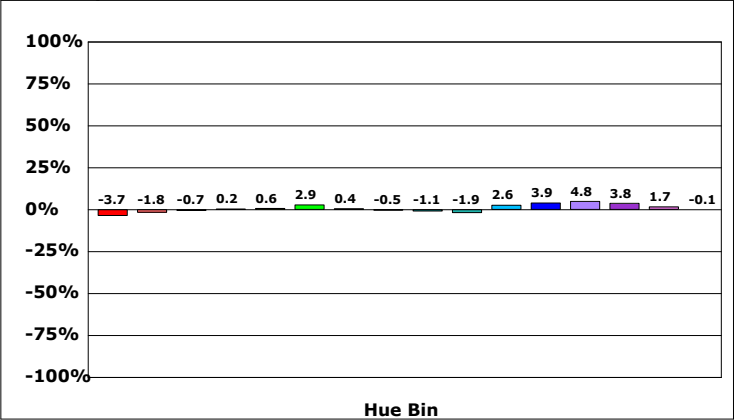


产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/31/23
备注:

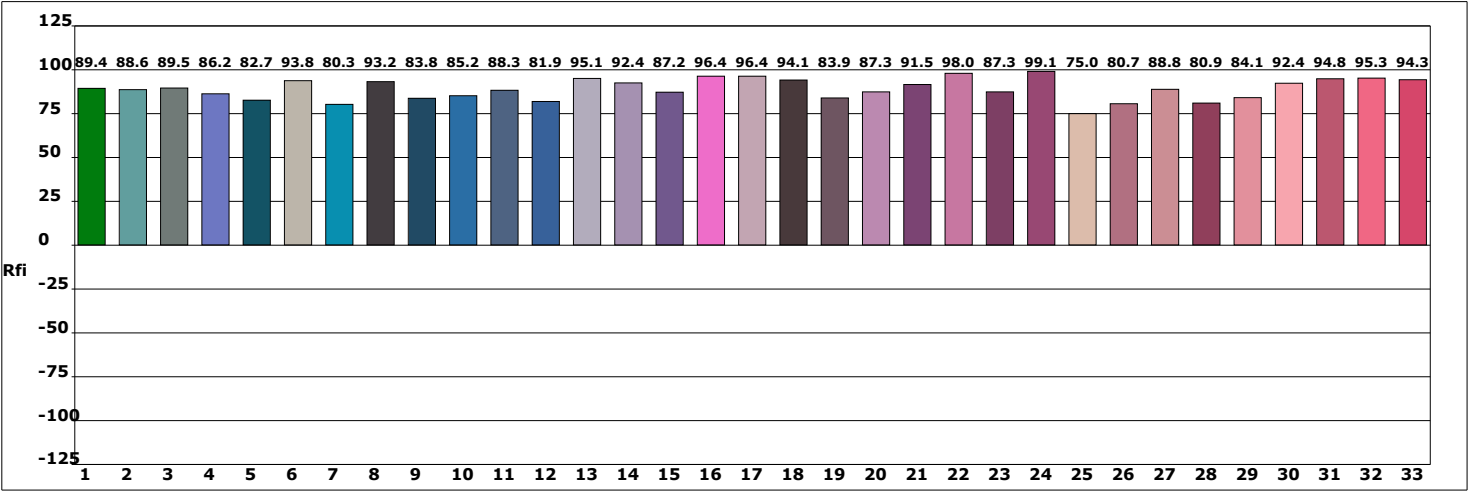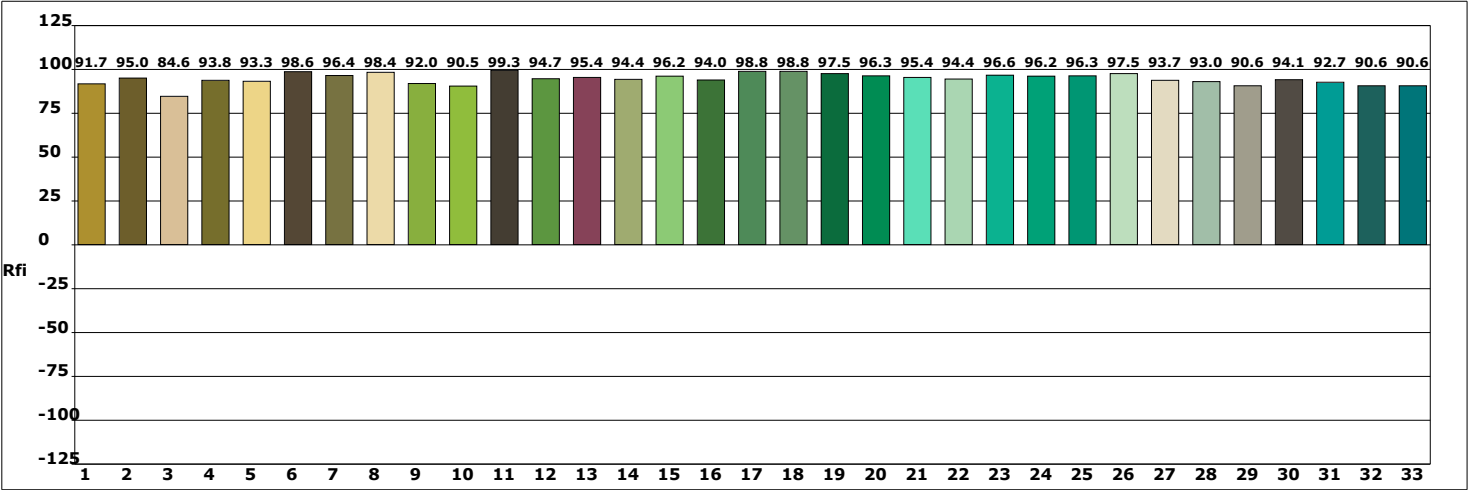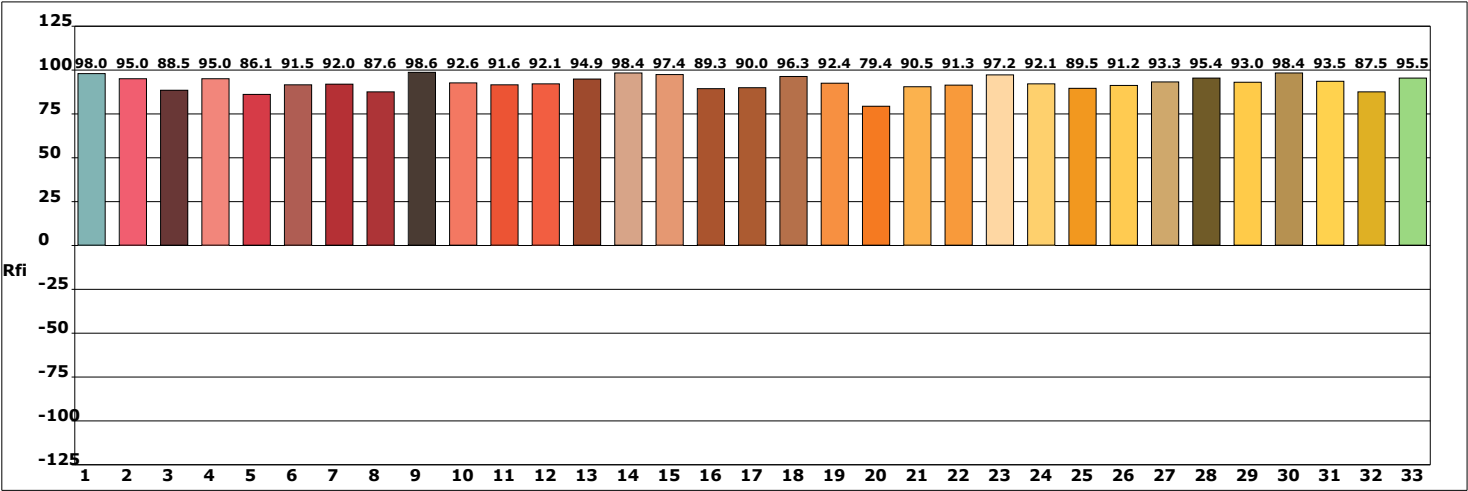


产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/31/23

光谱图

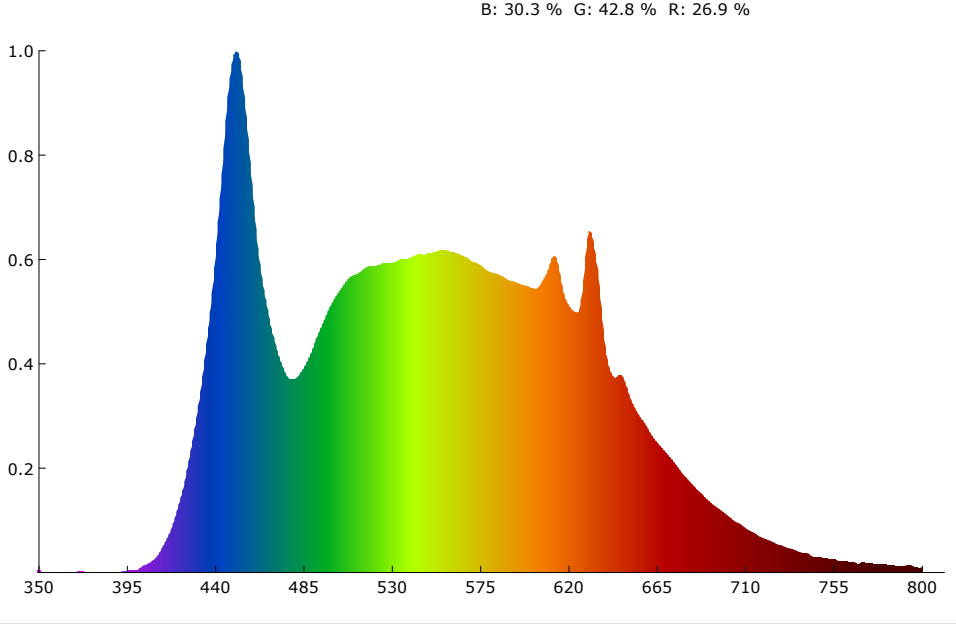

SDCM

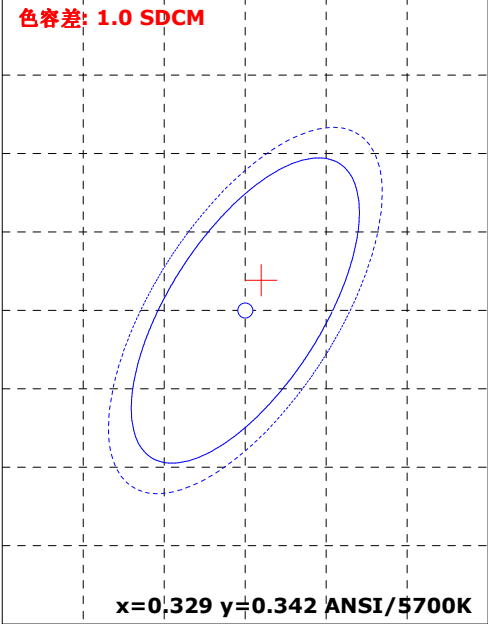

颜色参数:

坐标x: 0.3297 坐标y: 0.3436 坐标u: 0.2040 坐标v: 0.3189 坐标u': 0.2040 坐标v': 0.4783
红色比: 26.9 % 绿色比: 42.8 % 蓝色比: 30.3 % 光通量红色比: 15.4 % 光通量绿色比: 80.8 % 光通量蓝色比: 3.8 %

显色指数: 92.1 AvgR: 88.6
R1: 92.1 R2: 93.7 R3: 93.9 R4: 92.8 R5: 92.2 R6: 91.2 R7: 94.5 R8: 86.5
R9: 59.9 R10: 84.5 R11: 92.9 R12: 76.2 R13: 92.5 R14: 96.5 R15: 90.2


色温: 5625 K 光通量: 842.559 lm 峰值波长: 450.6 nm 色容差: 1.0
明暗视觉比: 2.2 中心波长: 452.7 nm 主波长: 532.2 nm 质心波长: 550.8 nm
半宽度: 29.6 nm 色偏差: 0.00251 色纯度: 2.2 % 色质指数: 90.7
LER(TM-30): 295.4 辐射功率: 2852.2 mw 色域指数(Rg): 99.2 逼真度(Rf): 90.0
红光辐射功率: 744.5 mw 近红辐射功率: 74.3 mw 远红辐射功率: 5.6 mw

电参数:







光效: 42.5 Lm/W 能效: 46.3 能效等级: G
电压: 221.4 V 电流: 0.092 A 功率: 19.820 W 功率因素: 0.964

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/31/23
备注:

Rf: 90.0 CCT: 5625K u': 0.2040
Rg: 99.2 LER: 295.4 Duv: 0.00251 v': 0.4783



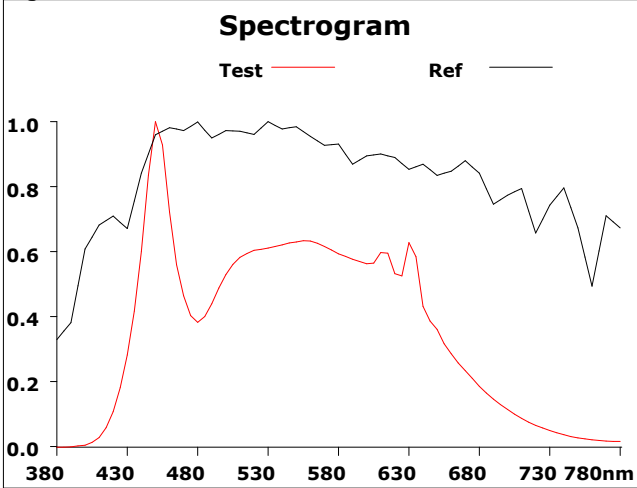


500			
Hue Bin	Rf	Chroma	Hue
1	87.3	-5.7%	-0.8%
2	92.2	-3.3%	2.6%
3	88.3	-2.0%	5.4%
4	91.8	-0.2%	3.8%
5	91.0	0.2%	2.5%
6	96.2	1.9%	0.3%
7	96.3	-1.1%	-1.1%
8	93.3	-3.2%	0.2%
9	91.4	-4.2%	5.0%
10	85.2	-2.5%	7.7%
11	82.6	1.8%	9.5%
12	92.7	3.2%	2.6%
13	90.9	5.5%	-2.7%
14	90.5	3.1%	-3.8%
15	82.1	5.2%	-13.3%
16	92.4	-2.1%	-3.4%

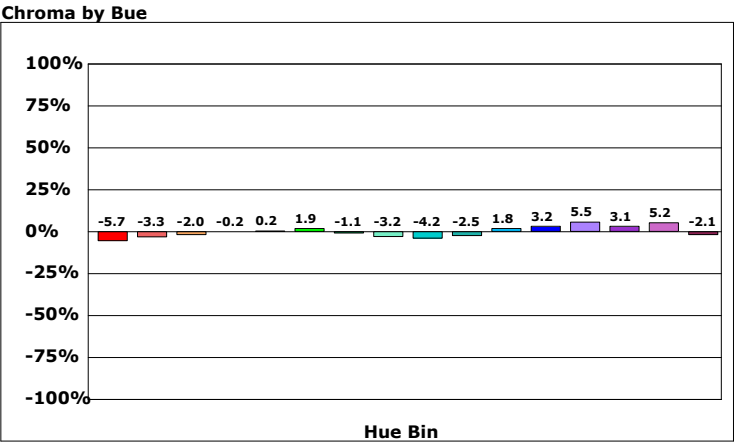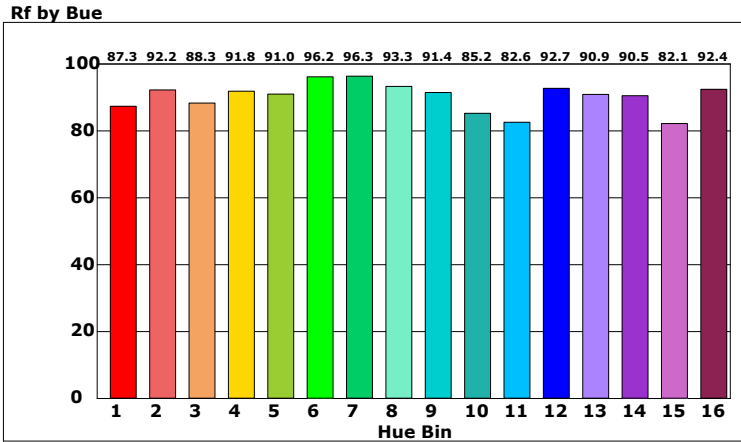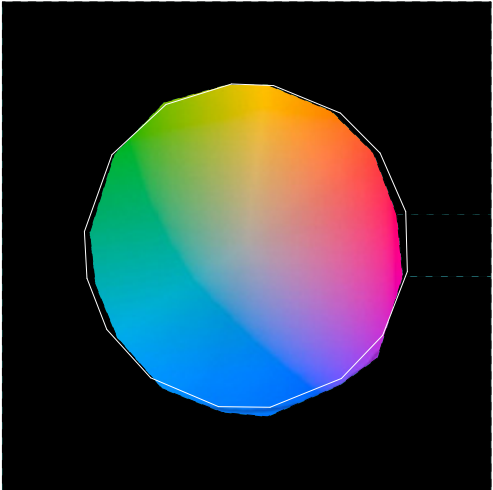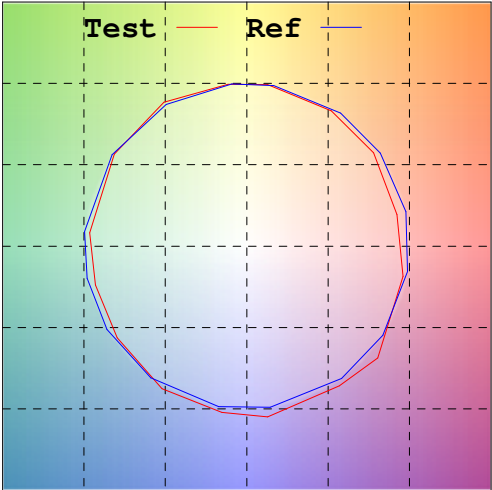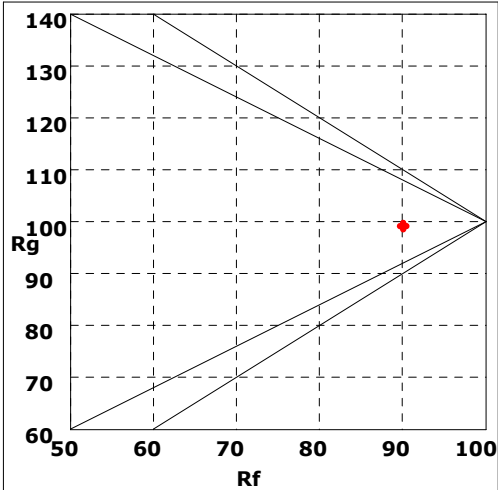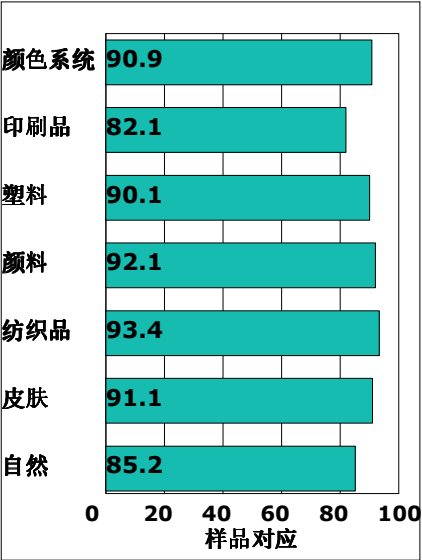

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/31/23

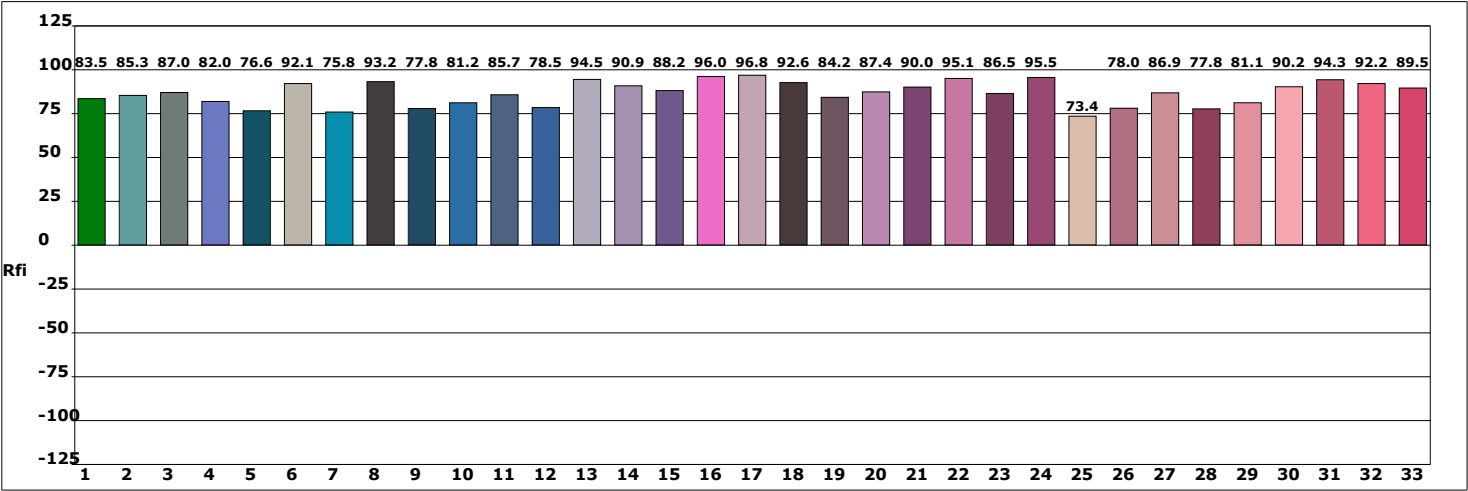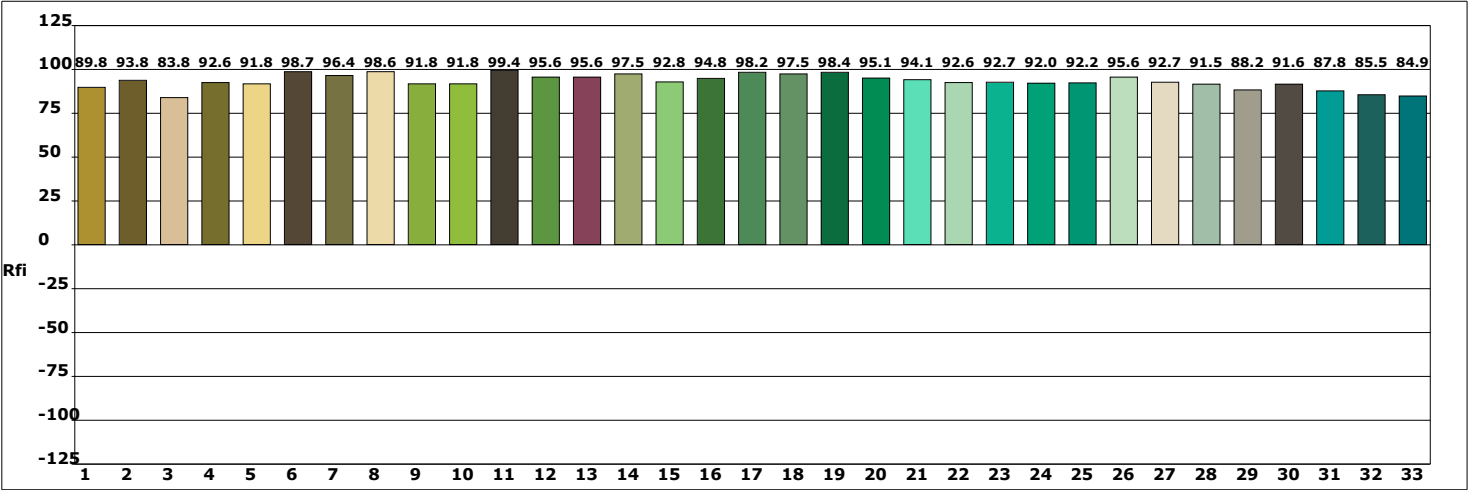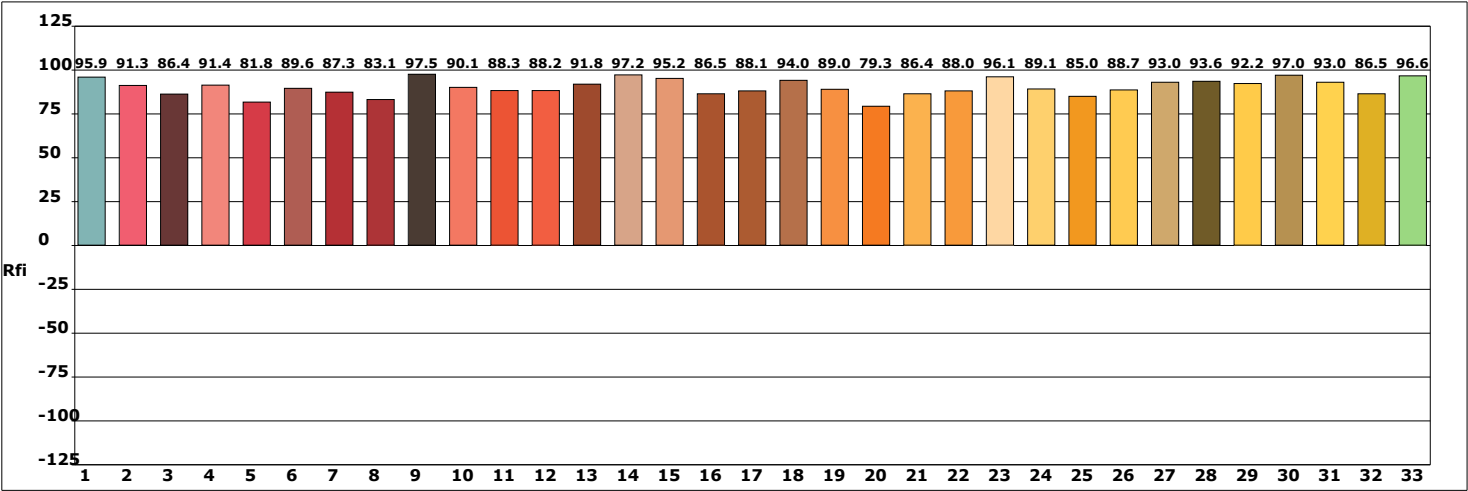

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/31/23