


Profile S350C

Profile S350C is a 350W powered RGBALC LED ellipsoidal light fixture. Lens available at 19°, 26°, 36°, 50°. Four shutters to control the shape of the light. Features aluminum housing, silent operation, HD optics create clean shutter beam. Fixture also equipped with powercon in & out connector.

Key Features:

- 350Watt LED
- RGBALC color mixing
- 2700K - 8000K adjustable color temperature
- Bright output, even and flat color mixing
- 19°, 26°, 36°, 50° lens optional
- Silent operation, intelligent controlled fan
- Smooth dimming
- Video flicker free
- Powercon in & out connection
- Aluminum housing

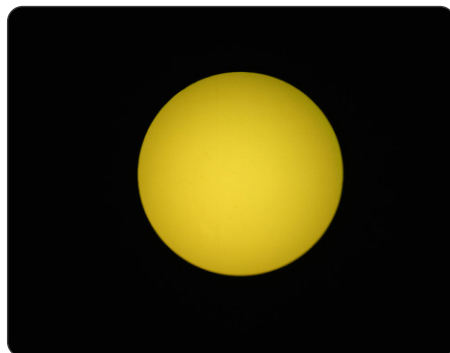

Physical

Length: 650 mm (25.6 in.)
Width: 270 mm (10.6 in.)
Height: 263 mm (10.4 in.)
Net Weight: 9.2 kg (20.2 lb.)

Source

Light source: 350Watt LED
Color temperature: 2700K - 8000K adjustable
Lens: 19°, 26°, 36°, 50° lens optional
LED lifetime: 50,000 hours avg.*

*LED Life may vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

Effects

Electronic shutter effect: Instant open and blackout
Electronic dimming: 0 – 100%
Strobe and pulse effects: Variable speed and action, random strobe

Control and Programming

Control options: DMX512
DMX channels: 2/8/12
DMX address setting: Control panel with LED display or via RDM
DMX compliance: USITT DMX512-A, RDM

Connection

AC power in / thru: PowerCon in & out
DMX & RDM data in / thru: 3-Pin XLR in & out(5-pin optional)

Electrical

AC power: 100–240 V nominal, 50/60 Hz
Power supply unit: Auto ranging power unit

Construction

Housing: Die-cast aluminum
Colour: Black
Environment: IP20

Thermal

Cooling: Forced ventilation with intelligent controlled fans
Maximum ambient temperature: 40°C
Minimum ambient temperature: -10°C

Accessories

Included: Power cable, Safety cable, Color frame, Manual