



光谱图

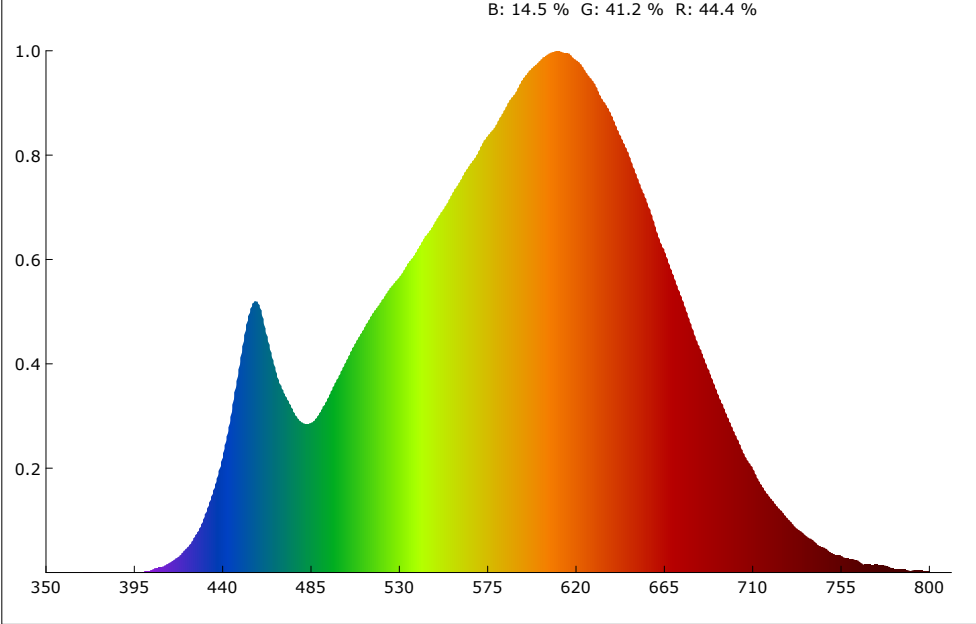

SDCM

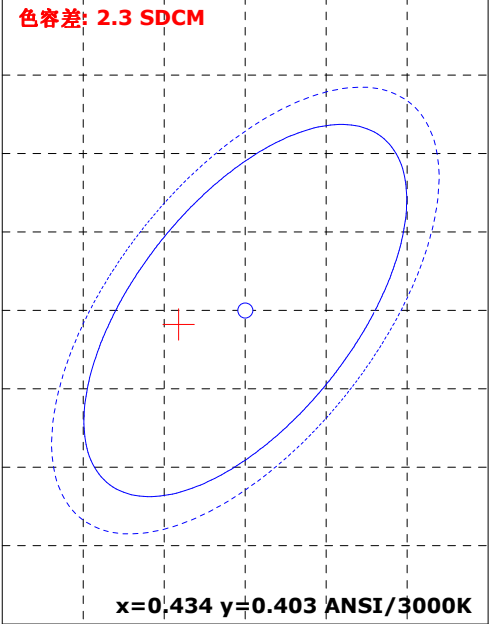

颜色参数:

坐标x: 0.4297 坐标y: 0.4021 坐标u: 0.2467 坐标v: 0.3463 坐标u': 0.2467 坐标v': 0.5195
红色比: 44.4 % 绿色比: 41.2 % 蓝色比: 14.5 % 光通量红色比: 22.2 % 光通量绿色比: 75.7 % 光通量蓝色比: 2.0 %

显色指数: 89.2 AvgR: 85.4
R1: 88.5 R2: 94.8 R3: 97.9 R4: 87.1 R5: 88.2 R6: 93.4 R7: 89.1 R8: 74.7
R9: 43.1 R10: 87.0 R11: 86.4 R12: 77.5 R13: 90.1 R14: 99.1 R15: 84.1


色温: 3111 K 光通量: 2032.722 lm 峰值波长: 611.6 nm 色容差: 2.3
明暗视觉比: 1.4 中心波长: 596.8 nm 主波长: 582.3 nm 质心波长: 586.6 nm
半宽度: 158.0 nm 色偏差: 0.00023 色纯度: 49.7 % 色质指数: 85.7
LER(TM-30): 303.0 辐射功率: 6707.7 mw 色域指数(Rg): 96.4 逼真度(Rf): 87.8
红光辐射功率: 2851.9 mw 近红辐射功率: 274.8 mw 远红辐射功率: 4.9 mw

电参数:





光效: 10.0 Lm/W 能效: 10.9 能效等级: G
电压: 219.8 V 电流: 1.338 A 功率: 203.300 W 功率因素: 0.691

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/17/23
备注:


Rf: 87.8 CCT: 3111K u': 0.2467
Rg: 96.4 LER: 303.0 Duv: 0.00023 v': 0.5195

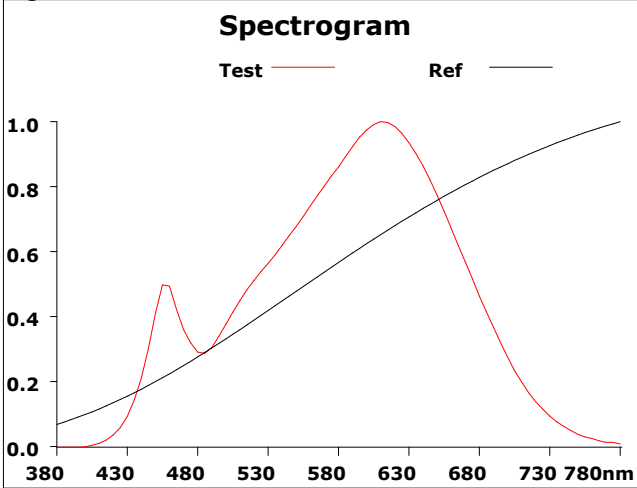


500			
Hue Bin	Rf	Chroma	Hue
1	85.0	-7.1%	0.8%
2	87.3	-4.9%	3.8%
3	86.4	-2.3%	5.8%
4	92.5	-1.7%	2.3%
5	92.3	-3.0%	1.6%
6	95.5	-0.6%	-1.1%
7	89.6	-5.4%	-1.1%
8	92.7	-3.7%	1.4%
9	88.4	-3.8%	6.1%
10	81.3	-1.8%	9.6%
11	84.1	1.9%	9.7%
12	88.7	6.2%	0.4%
13	90.2	2.5%	-5.8%
14	84.5	3.6%	-10.6%
15	84.6	-2.6%	-8.0%
16	81.7	-4.5%	-11.6%

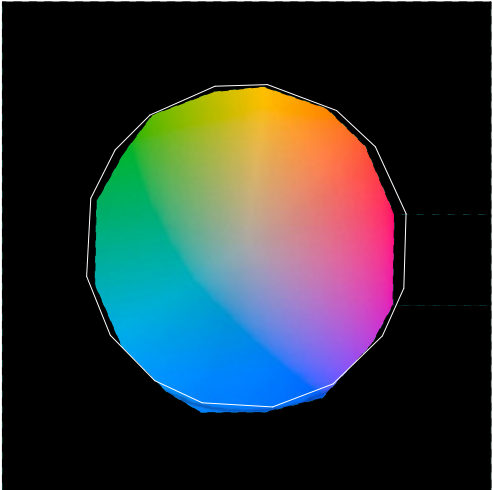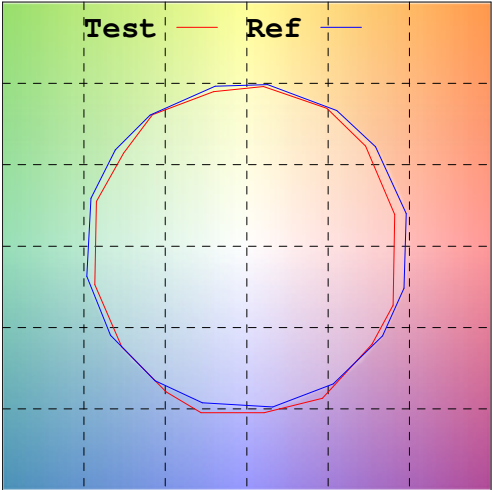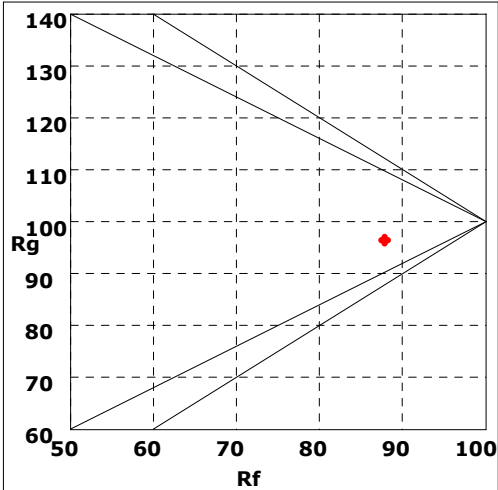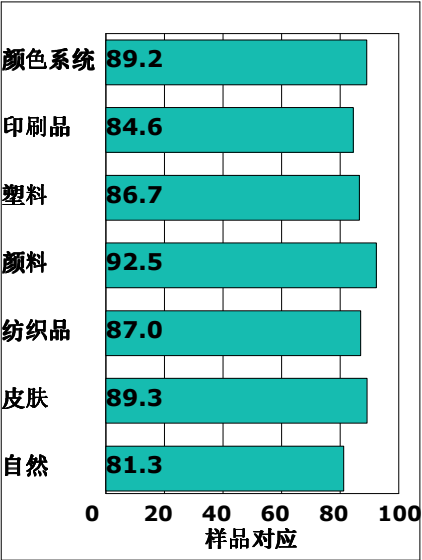




Rf by Bue

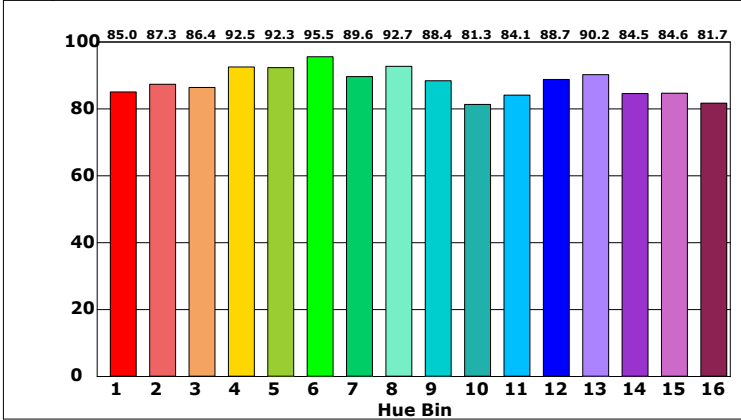

Chroma by Bue

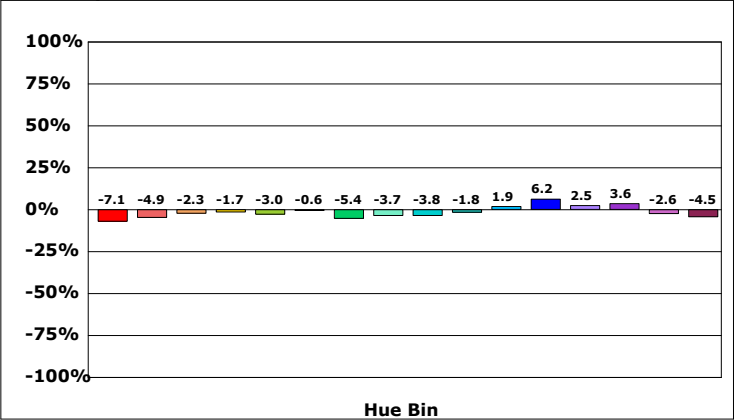

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/17/23
备注:

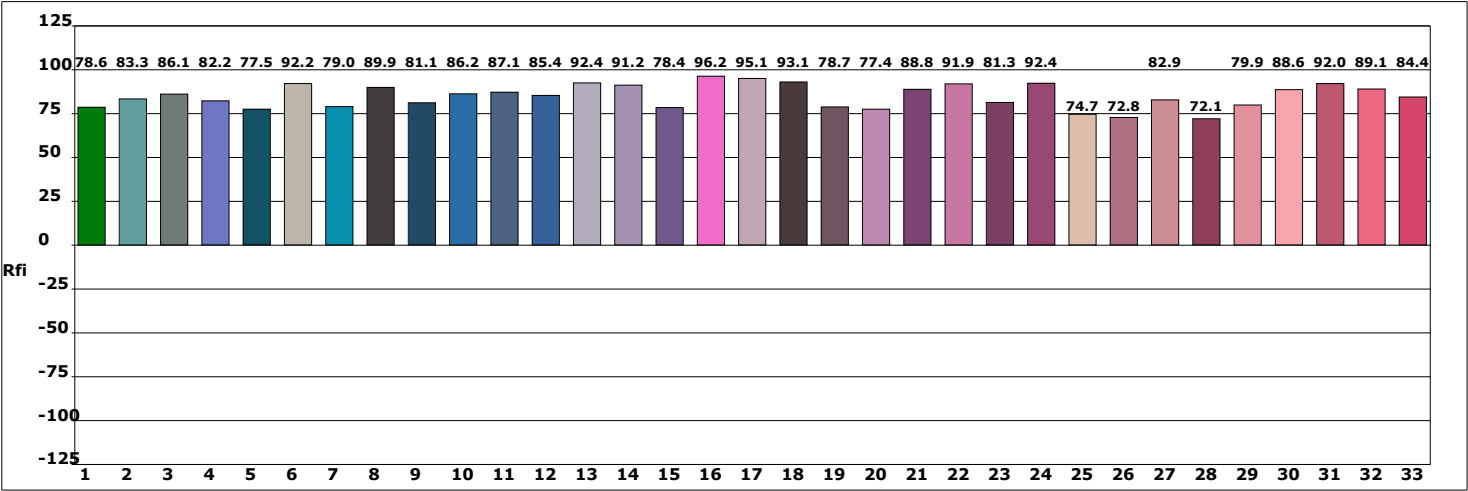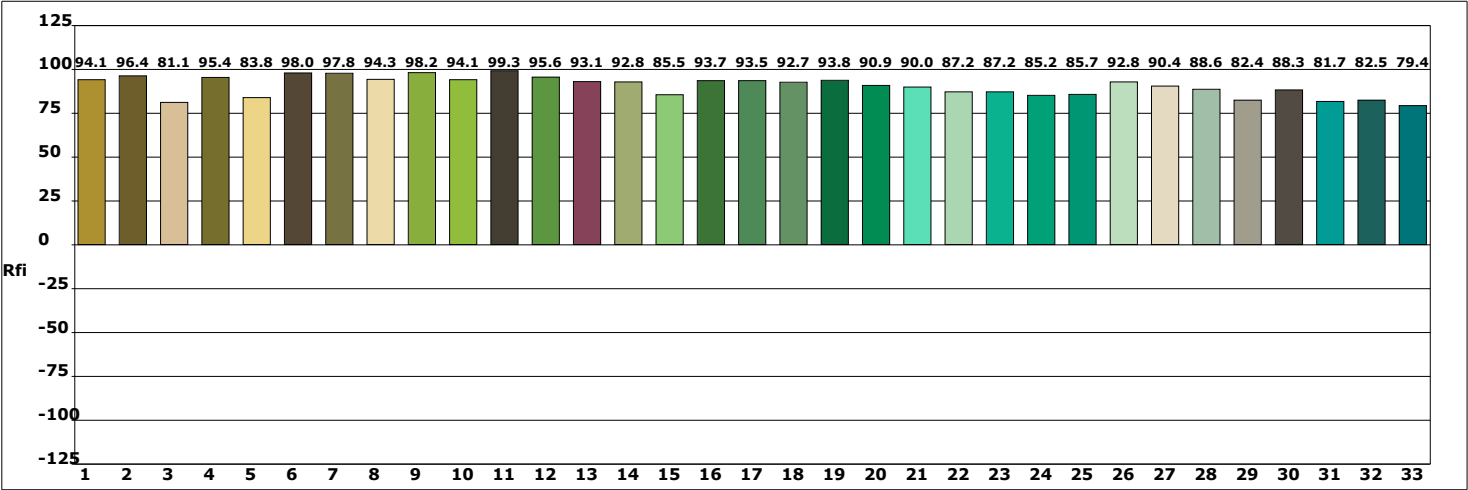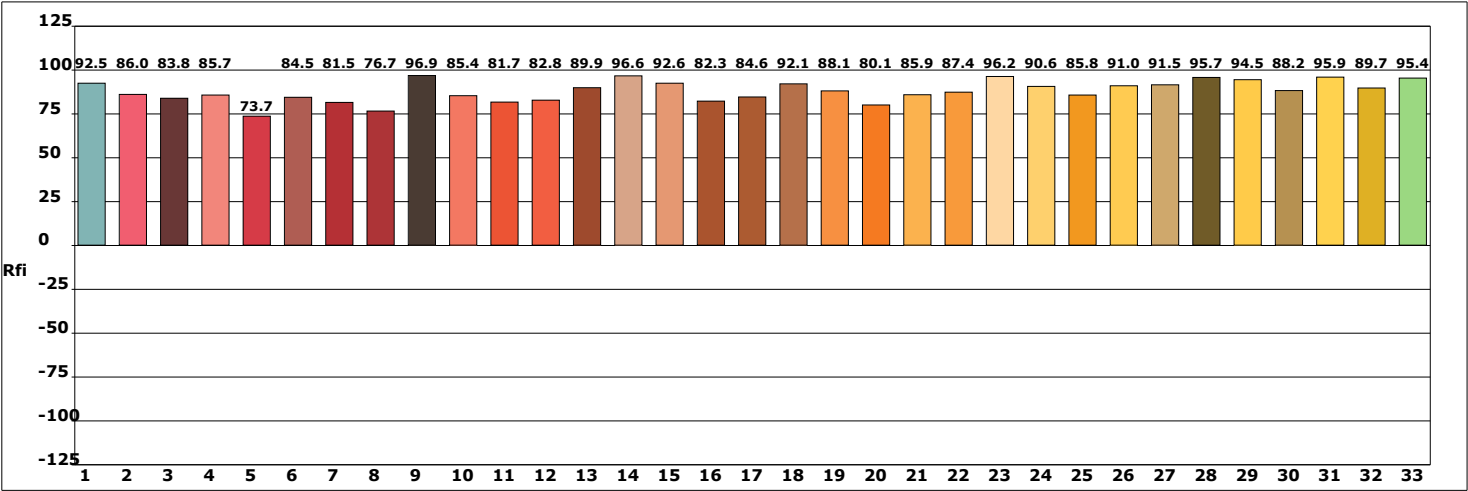

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/17/23