



光谱图

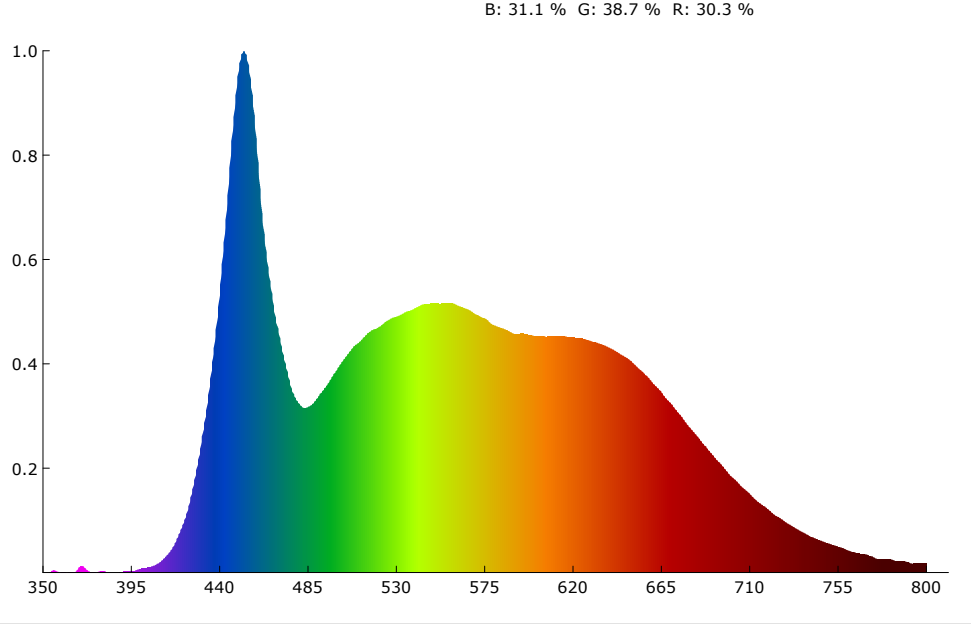

SDCM

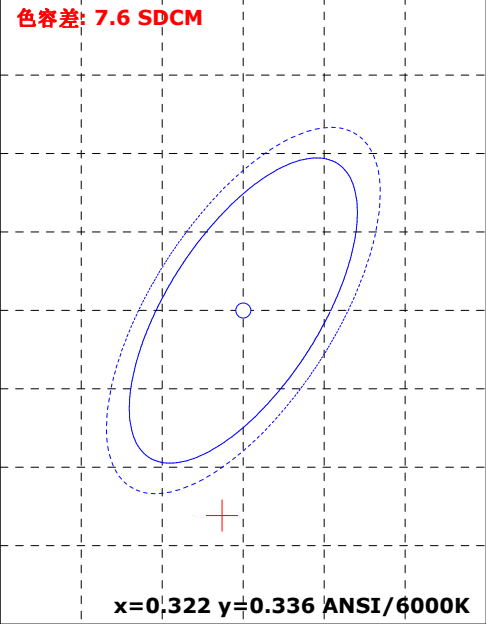

颜色参数:

坐标x: 0.3237 坐标y: 0.3269 坐标u: 0.2063 坐标v: 0.3126 坐标u': 0.2063 坐标v': 0.4689
红色比: 30.3 % 绿色比: 38.7 % 蓝色比: 31.1 % 光通量红色比: 15.8 % 光通量绿色比: 79.8 % 光通量蓝色比: 4.3 %

显色指数: 93.8 AvgR: 92.7
R1: 98.7 R2: 98.0 R3: 93.4 R4: 95.4 R5: 91.7 R6: 86.0 R7: 92.7 R8: 94.8
R9: 93.8 R10: 90.4 R11: 94.7 R12: 70.5 R13: 98.5 R14: 96.2 R15: 96.1


色温: 5932 K 光通量: 5832.832 lm 峰值波长: 453.3 nm 色容差: 7.6
明暗视觉比: 2.2 中心波长: 454.3 nm 主波长: 482.6 nm 质心波长: 559.9 nm
半宽度: 28.8 nm 色偏差: -0.00330 色纯度: 3.8 % 色质指数: 85.7
LER(TM-30): 271.3 辐射功率: 21498.4 mw 色域指数(Rg): 101.4 逼真度(Rf): 89.5
红光辐射功率: 6144.7 mw 近红辐射功率: 1096.4 mw 远红辐射功率: 73.7 mw

电参数:





光效: 31.6 Lm/W 能效: 34.4 能效等级: G
电压: 220.5 V 电流: 1.213 A 功率: 184.700 W 功率因素: 0.690

产品型号:	制造厂商:
产品编号:	测试单位:
测试人员:	测试日期:10/30/23
备注:	


Rf: 89.5 CCT: 5932K u': 0.2063
Rg: 101.4 LER: 271.3 Duv: -0.00330 v': 0.4689

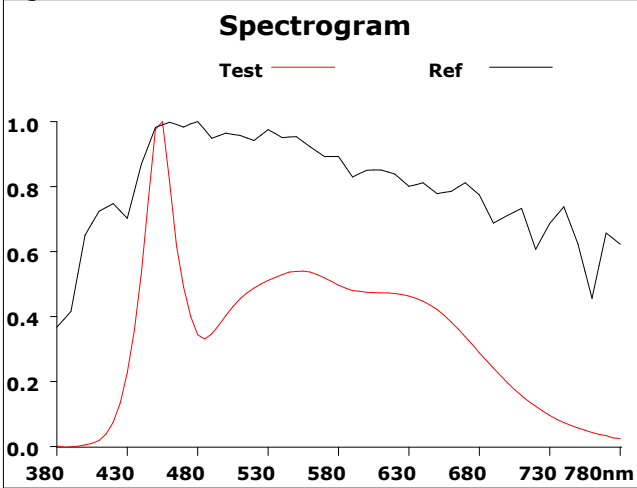


500			
Hue Bin	Rf	Chroma	Hue
1	92.6	-2.0%	0.3%
2	93.0	-1.5%	2.6%
3	89.6	-0.5%	4.5%
4	89.3	0.4%	4.9%
5	89.1	-0.5%	2.5%
6	95.1	1.1%	0.3%
7	96.0	-0.9%	-0.8%
8	92.3	-2.7%	2.3%
9	88.6	-4.1%	8.0%
10	81.0	-1.8%	10.4%
11	77.9	2.4%	12.2%
12	88.4	2.9%	6.5%
13	91.0	6.0%	3.6%
14	91.9	4.0%	0.2%
15	84.6	10.4%	-7.6%
16	96.4	-0.2%	-1.3%

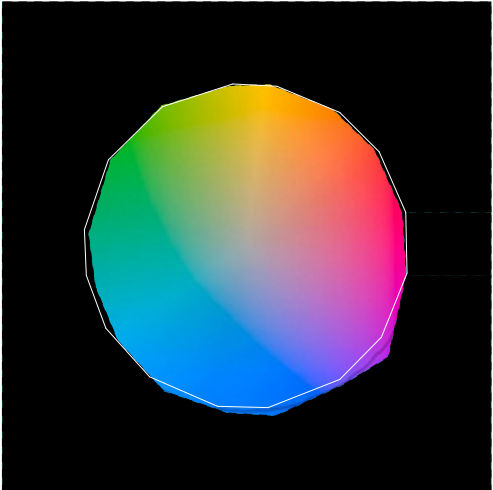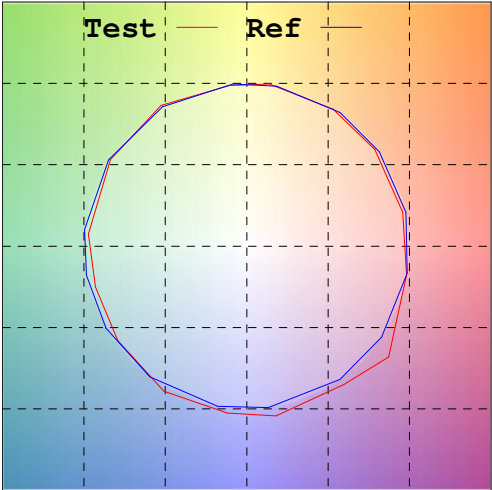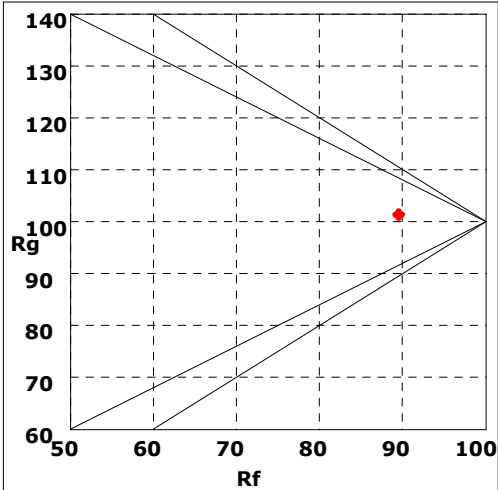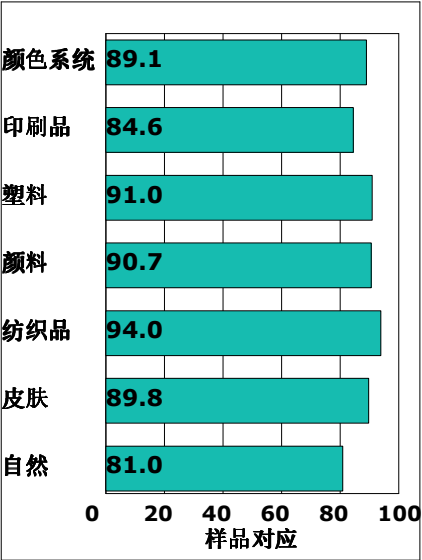




Rf by Bue

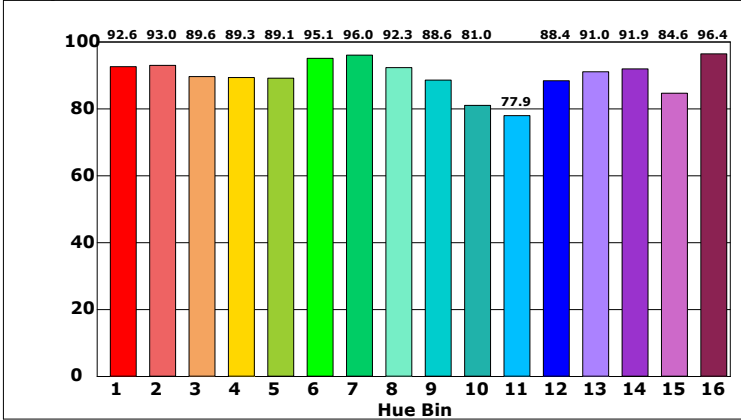

Chroma by Bue

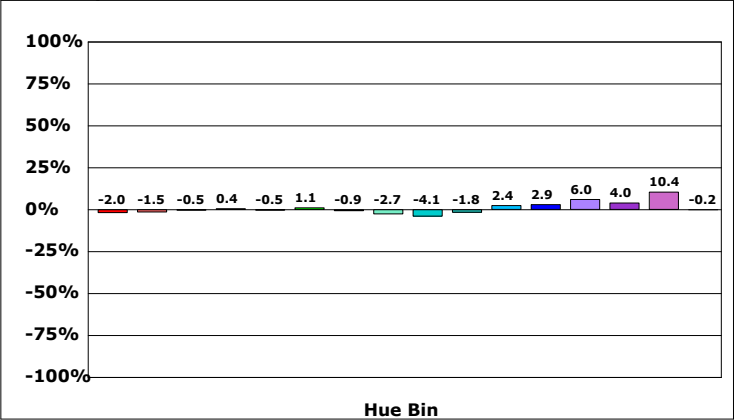

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/30/23
备注:

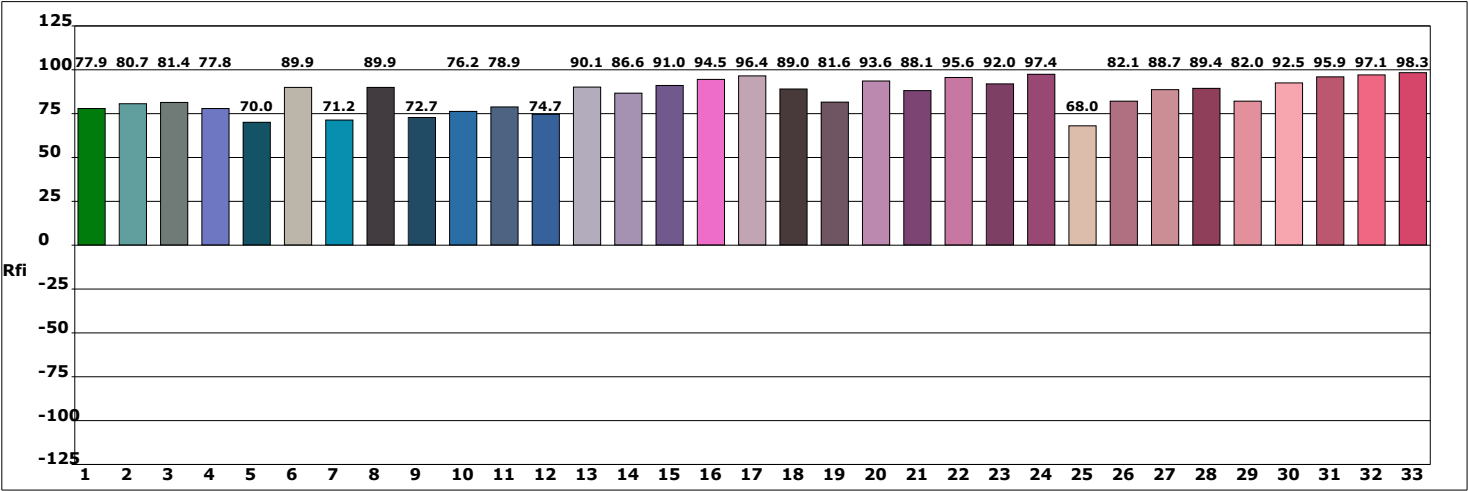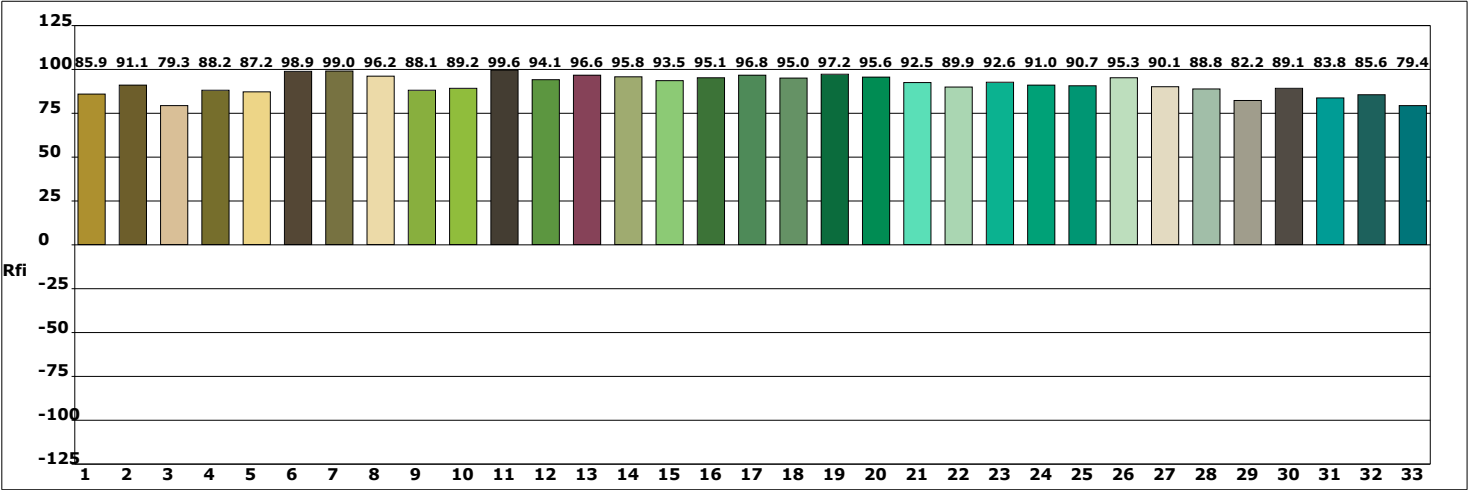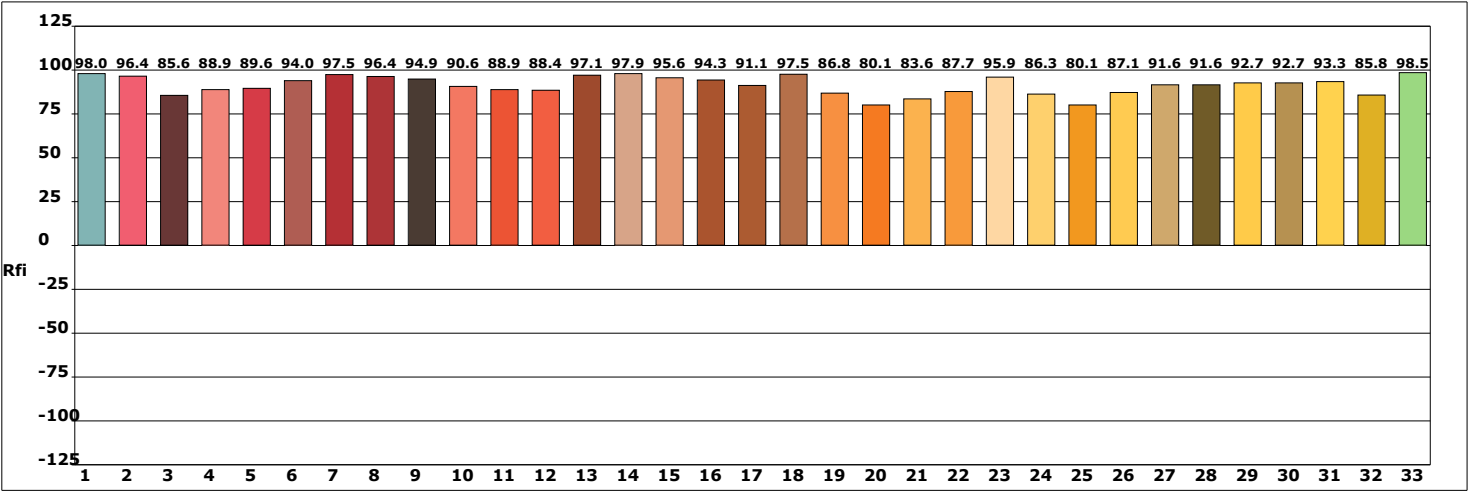

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/30/23