



光谱图

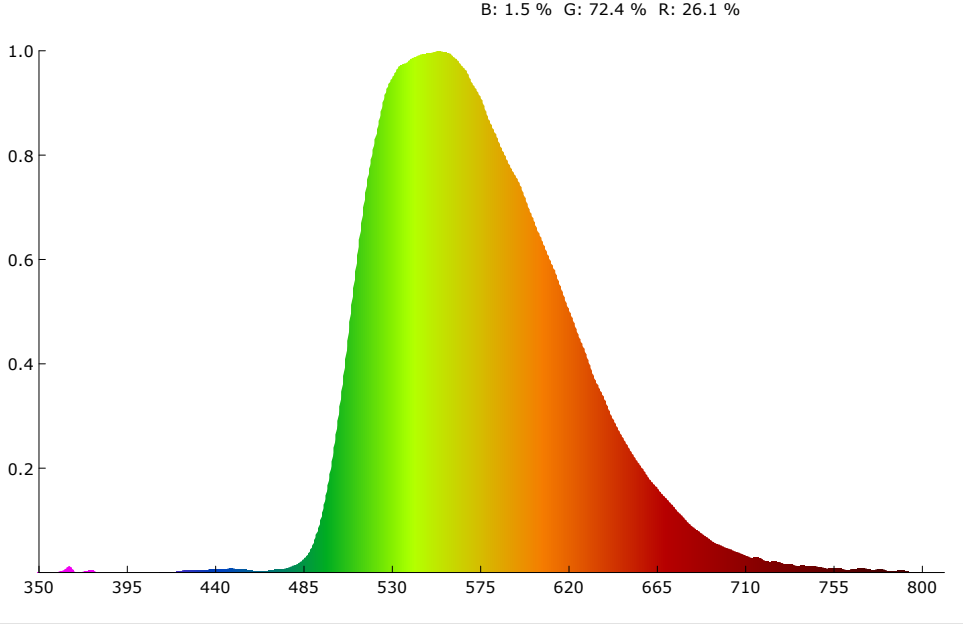

SDCM

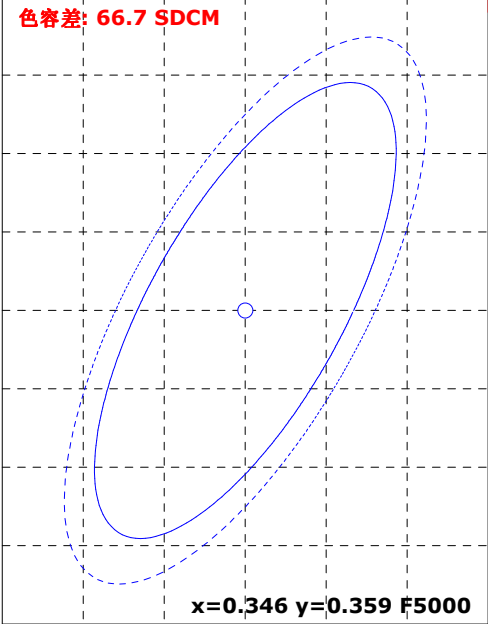

颜色参数:

坐标x: 0.4232 坐标y: 0.5519 坐标u: 0.1929 坐标v: 0.3773 坐标u': 0.1929 坐标v': 0.5659
红色比: 26.1 % 绿色比: 72.4 % 蓝色比: 1.5 % 光通量红色比: 11.1 % 光通量绿色比: 88.8 % 光通量蓝色比: 0.1 %

显色指数: 34.2 AvgR: 19.8
R1: 41.8 R2: 45.7 R3: 37.3 R4: 7.6 R5: 40.1 R6: 41.5 R7: 40.0 R8: 19.6
R9: -99.0 R10: -9.3 R11: -15.7 R12: 11.6 R13: 40.6 R14: 69.1 R15: 25.4


色温: 4063 K 光通量: 3143.683 lm 峰值波长: 556.5 nm 色容差: 66.7
明暗视觉比: 1.3 中心波长: 564.6 nm 主波长: 568.0 nm 质心波长: 573.8 nm
半宽度: 110.5 nm 色偏差: 0.05362 色纯度: 92.9 % 色质指数: 18.6
LER(TM-30): 473.3 辐射功率: 6642.6 mw 色域指数(Rg): 32.1 逼真度(Rf): 25.5
红光辐射功率: 1709.3 mw 近红辐射功率: 79.6 mw 远红辐射功率: 4.2 mw

电参数:





光效: 53.7 Lm/W 能效: 58.5 能效等级: G
电压: 220.7 V 电流: 0.431 A 功率: 58.570 W 功率因素: 0.614

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/16/14
备注:


Rf: 25.5 CCT: 4063K u': 0.1929
Rg: 32.1 LER: 473.3 Duv: 0.05362 v': 0.5659

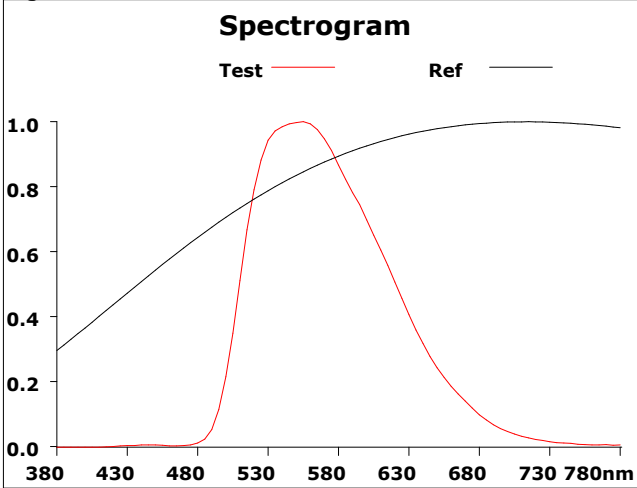


500			
Hue Bin	Rf	Chroma	Hue
1	44.2	-26.5%	1.5%
2	43.2	-24.2%	-14.6%
3	9.1	-41.0%	-23.0%
4	7.8	-55.3%	-16.5%
5	5.4	-70.3%	3.9%
6	1.9	-67.1%	31.4%
7	1.9	-52.7%	47.4%
8	17.3	-31.7%	35.0%
9	45.6	-20.7%	30.3%
10	48.4	-20.7%	19.8%
11	56.2	-24.4%	-1.8%
12	28.2	-35.6%	-6.9%
13	39.4	-45.2%	-4.5%
14	18.0	-42.7%	14.1%
15	29.6	-41.3%	16.6%
16	41.9	-28.8%	13.6%

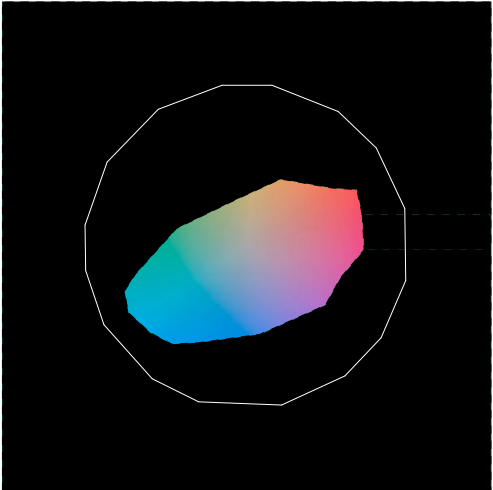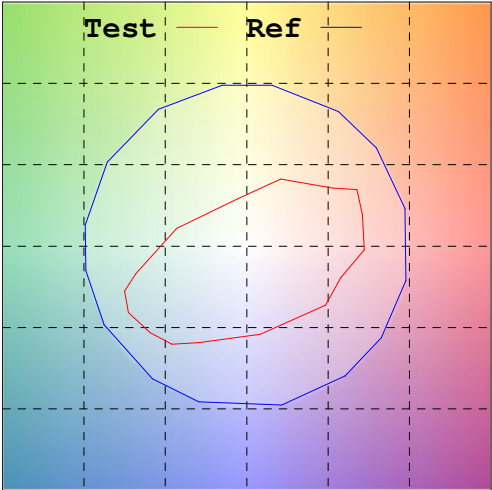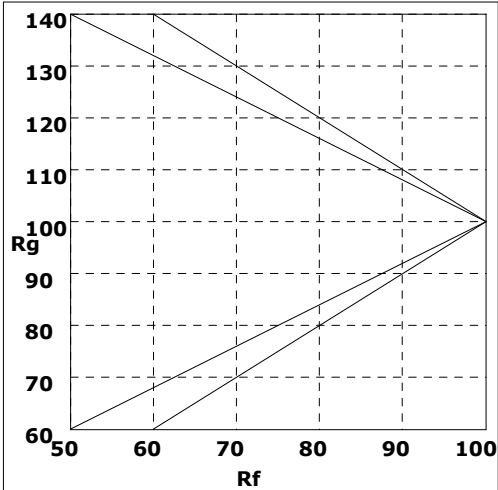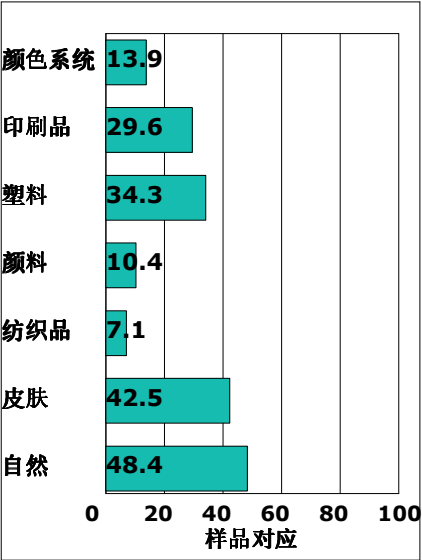

Rf by Bue

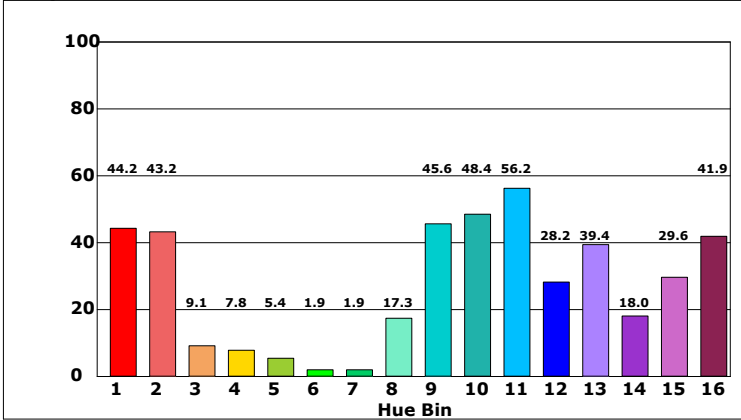

Chroma by Bue

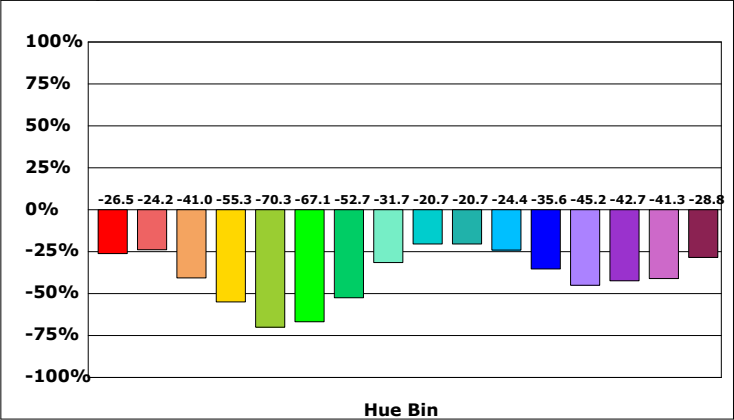

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:07/16/14

