



光谱图

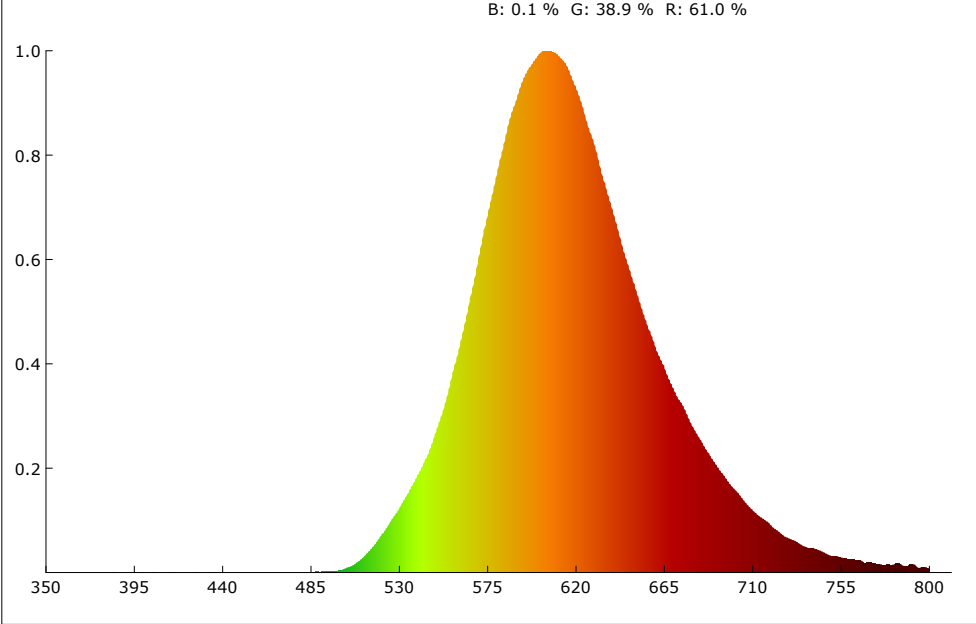

SDCM

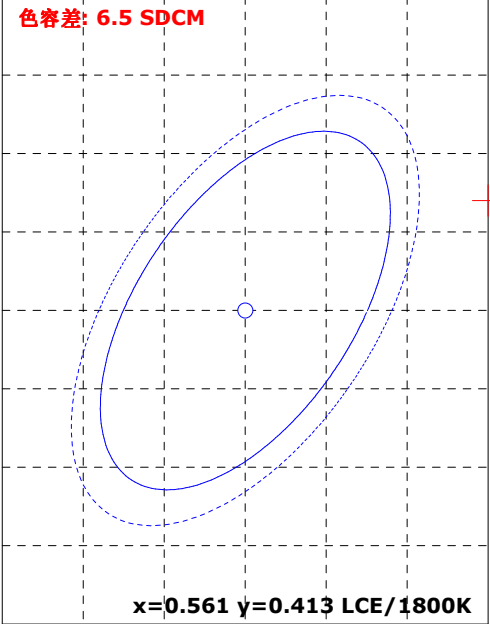

颜色参数:

坐标x: 0.5703 坐标y: 0.4270 坐标u: 0.3267 坐标v: 0.3669 坐标u': 0.3267 坐标v': 0.5504
红色比: 61.0 % 绿色比: 38.9 % 蓝色比: 0.1 % 光通量红色比: 32.4 % 光通量绿色比: 67.6 % 光通量蓝色比: 0.0 %

显色指数: 51.6 AvgR: 39.4
R1: 45.5 R2: 70.5 R3: 81.9 R4: 34.6 R5: 40.4 R6: 61.0 R7: 65.4 R8: 14.2
R9: -70.2 R10: 40.7 R11: 14.8 R12: 17.2 R13: 47.2 R14: 89.9 R15: 38.1


色温: 1762 K 光通量: 1815.301 lm 峰值波长: 607.7 nm 色容差: 6.5
明暗视觉比: 0.4 中心波长: 609.5 nm 主波长: 589.4 nm 质心波长: 617.2 nm
半宽度: 88.8 nm 色偏差: 0.00659 色纯度: 99.4 % 色质指数: 3.0
LER(TM-30): 324.5 辐射功率: 5595.0 mw 色域指数(Rg): 11.8 逼真度(Rf): 15.6
红光辐射功率: 3243.5 mw 近红辐射功率: 264.2 mw 远红辐射功率: 15.5 mw

电参数:

光效: 32.2 Lm/W 能效: 35.1 能效等级: G
电压: 220.6 V 电流: 0.417 A 功率: 56.290 W 功率因素: 0.612

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/16/14
备注:

Rf: 15.6 CCT: 1762K u': 0.3267
Rg: 11.8 LER: 324.5 Duv: 0.00659 v': 0.5504

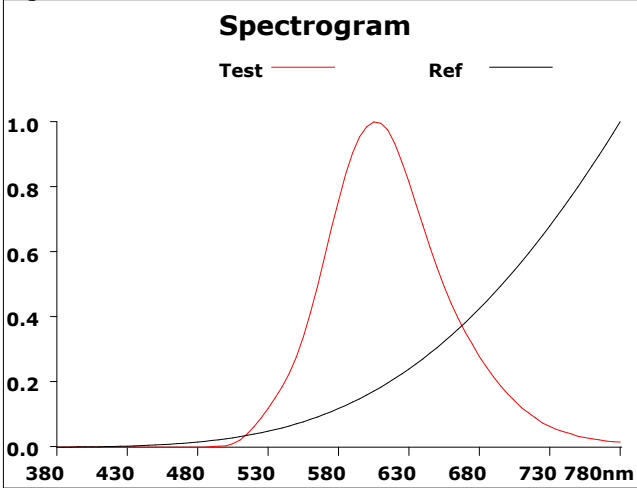

500			
Hue Bin	Rf	Chroma	Hue
1	36.2	-24.0%	-16.3%
2	8.3	-38.5%	-34.3%
3	0.1	-63.8%	-40.1%
4	3.1	-84.5%	-21.7%
5	27.3	-90.5%	8.4%
6	2.7	-64.0%	36.3%
7	13.6	-42.7%	32.8%
8	42.1	-33.4%	21.4%
9	41.4	-23.8%	-13.6%
10	13.0	-41.7%	-27.4%
11	2.7	-59.8%	-25.9%
12	1.4	-73.3%	1.6%
13	8.3	-77.9%	6.2%
14	24.9	-73.3%	19.4%
15	29.8	-40.7%	26.9%
16	46.2	-28.2%	9.8%

