



光谱图

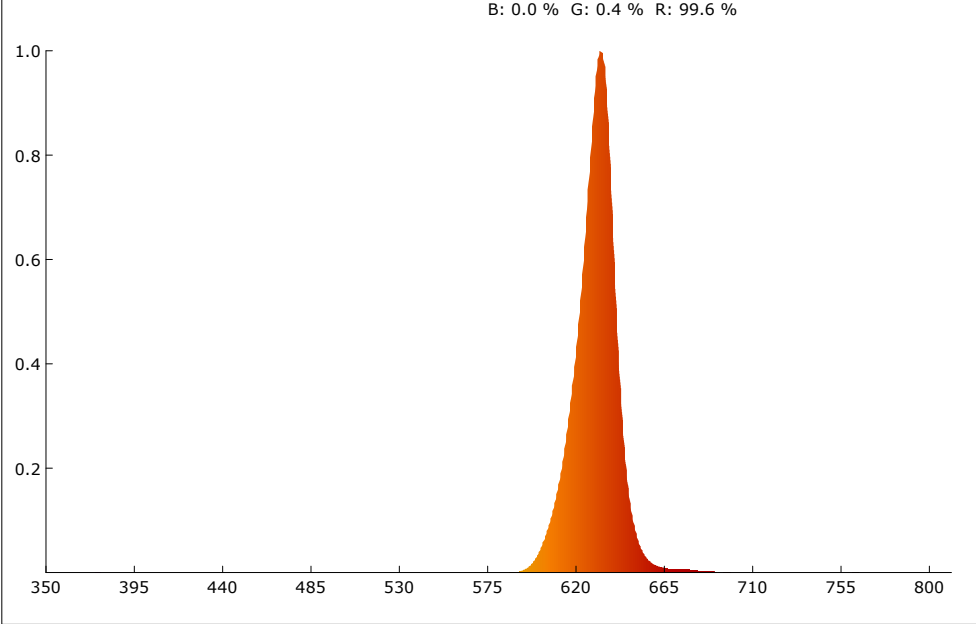

SDCM

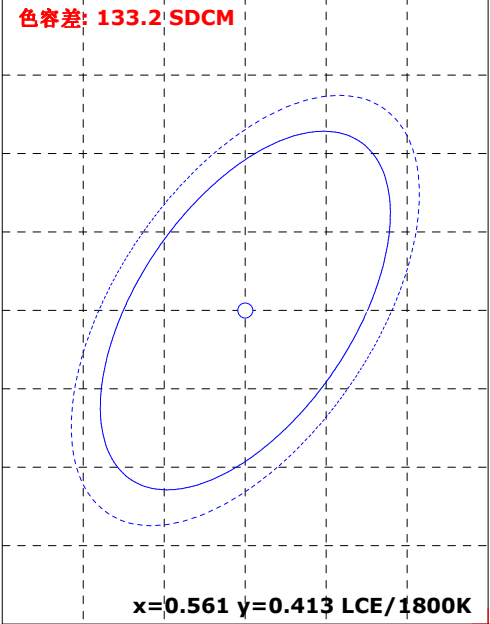

颜色参数:

坐标x: 0.6999 坐标y: 0.3000 坐标u: 0.5384 坐标v: 0.3461 坐标u': 0.5384 坐标v': 0.5192
红色比: 99.6 % 绿色比: 0.4 % 蓝色比: 0.0 % 光通量红色比: 98.7 % 光通量绿色比: 1.3 % 光通量蓝色比: 0.0 %

显色指数: 6.1 AvgR: 6.8
R1: -3.9 R2: 74.0 R3: 26.6 R4: -35.9 R5: -5.7 R6: 89.6 R7: -5.8 R8: -89.3
R9: -99.0 R10: 66.3 R11: -21.8 R12: 79.1 R13: 21.6 R14: 56.5 R15: -50.5


色温: 1000 K 光通量: 1233.953 lm 峰值波长: 633.5 nm 色容差: 133.2
明暗视觉比: 0.0 中心波长: 631.5 nm 主波长: 624.6 nm 质心波长: 630.7 nm
半宽度: 18.5 nm 色偏差: -0.01218 色纯度: 100.0 % 色质指数: -nan(ind)
LER(TM-30): 185.0 辐射功率: 6670.1 mw 色域指数(Rg): 0.5 逼真度(Rf): 2.6
红光辐射功率: 6638.7 mw 近红辐射功率: 3.0 mw 远红辐射功率: 0.2 mw

电参数:






光效: 20.1 Lm/W 能效: 21.9 能效等级: G
电压: 220.7 V 电流: 0.452 A 功率: 61.490 W 功率因素: 0.616

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/16/14
备注:

Rf: 2.6 CCT: 1000K u': 0.5384
Rg: 0.5 LER: 185.0 Duv: 0.01218 v': 0.5192

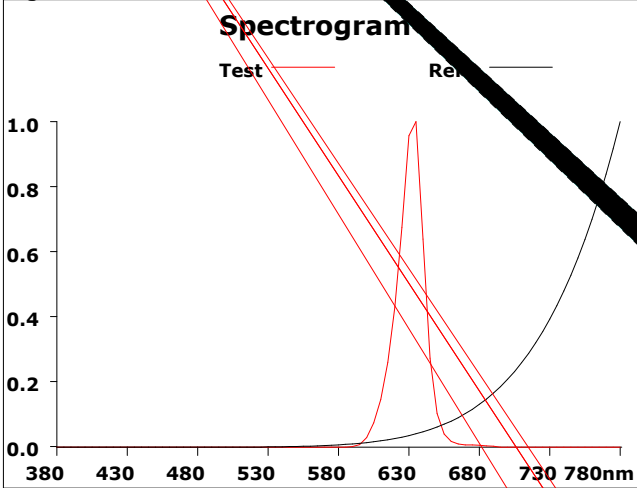

500			
Hue Bin	Rf	Chroma	Hue
1	1.4	-83.4%	6.1%
2	43.4	-90.4%	-4.2%
3	66.2	-99.5%	3.9%
4	100.0	nan%	-nan(ind)%
5	74.9	-91.7%	13.5%
6	100.0	nan%	-nan(ind)%
7	52.4	-54.2%	20.9%
8	0.3	-76.5%	-4.1%
9	0.0	-85.9%	1.4%
10	1.3	-100.8%	4.0%
11	39.8	-98.1%	7.0%
12	33.5	-97.9%	-76.5%
13	4.4	-113.8%	-26.4%
14	1.6	-96.1%	8.1%
15	48.1	72.4%	1.0%
16	0.7	-100.1%	-8.4%

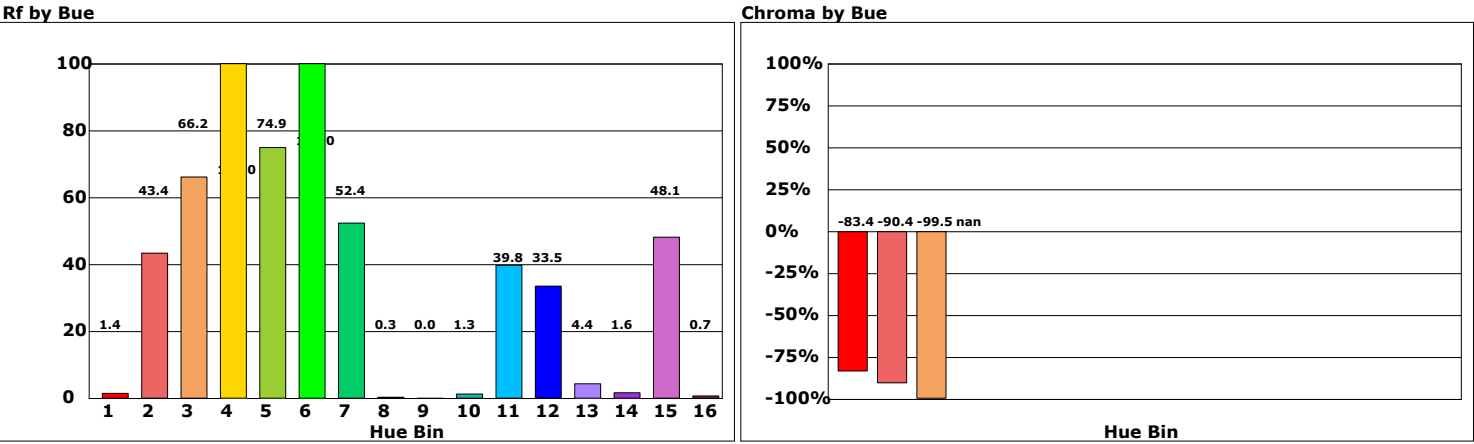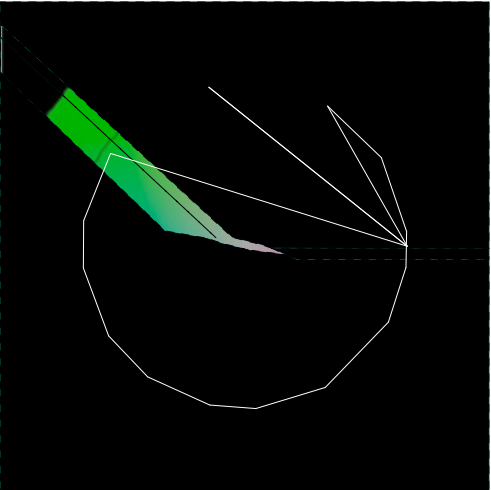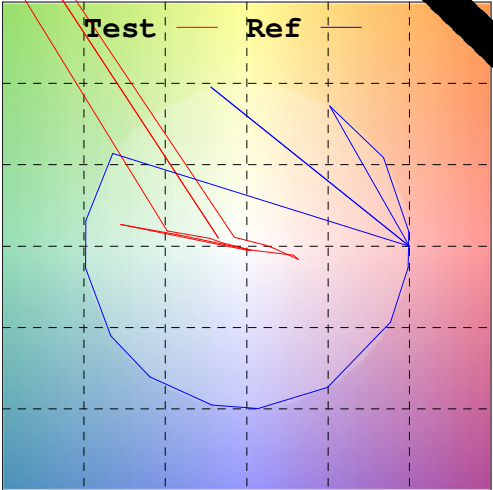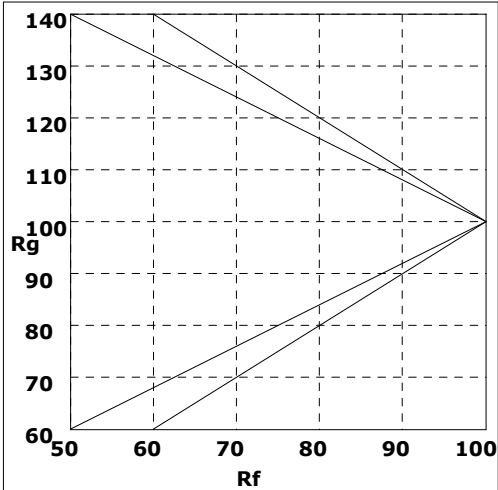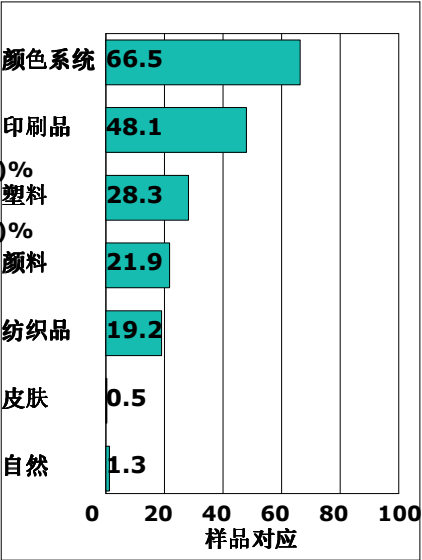

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173