



光谱图

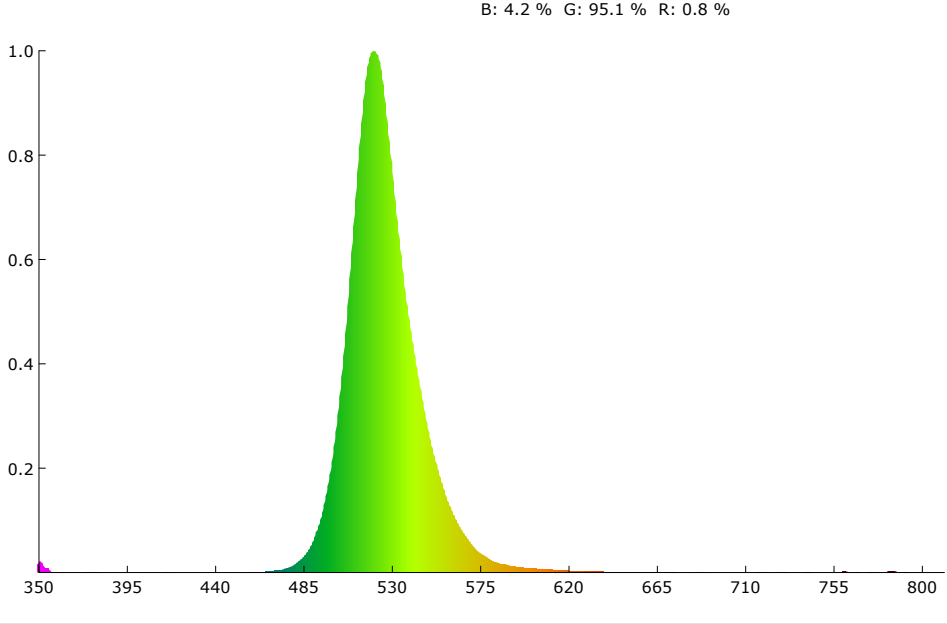

SDCM

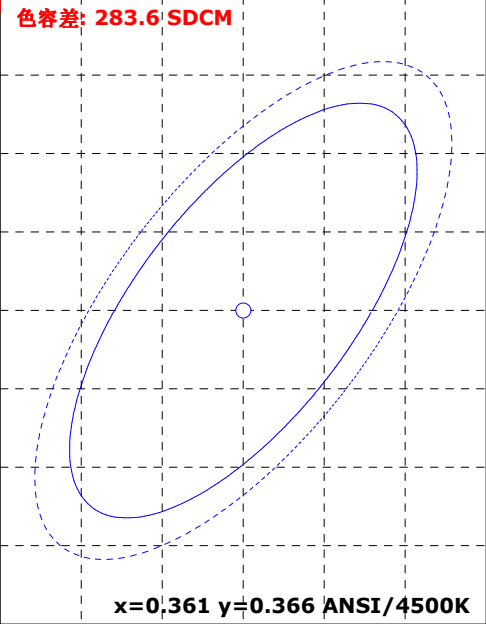

颜色参数:

坐标x: 0.1725 坐标y: 0.7387 坐标u: 0.0599 坐标v: 0.3848 坐标u': 0.0599 坐标v': 0.5772
红色比: 0.8 % 绿色比: 95.1 % 蓝色比: 4.2 % 光通量红色比: 0.3 % 光通量绿色比: 99.4 % 光通量蓝色比: 0.3 %

显色指数: -28.8 AvgR: -40.7
R1: -35.6 R2: -14.7 R3: -33.5 R4: -72.0 R5: -11.4 R6: -18.5 R7: -11.2 R8: -34.0
R9: -99.0 R10: -99.0 R11: -99.0 R12: -38.0 R13: -43.2 R14: 32.8 R15: -33.9


色温: 7700 K 光通量: 1911.784 lm 峰值波长: 521.6 nm 色容差: 283.6
明暗视觉比: 2.7 中心波长: 523.0 nm 主波长: 528.6 nm 质心波长: 526.9 nm
半宽度: 30.7 nm 色偏差: 0.15840 色纯度: 84.6 % 色质指数: 0.2
LER(TM-30): 500.6 辐射功率: 3819.3 mw 色域指数(Rg): 6.2 逼真度(Rf): 0.5
红光辐射功率: 29.6 mw 近红辐射功率: 5.5 mw 远红辐射功率: 2.5 mw

电参数:

光效: 35.6 Lm/W 能效: 38.7 能效等级: G
电压: 220.5 V 电流: 0.401 A 功率: 53.770 W 功率因素: 0.608

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/16/14
备注:

Rf: 0.5 CCT: 7700K u': 0.0599
Rg: 6.2 LER: 500.6 Duv: 0.15840 v': 0.5772

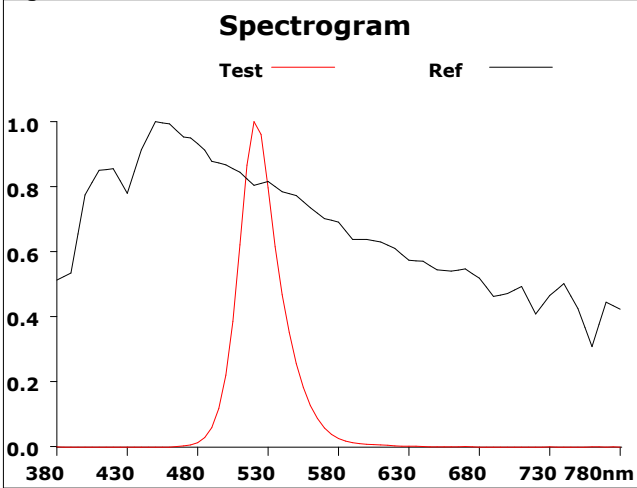

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-83.6%	2.5%
2	0.0	-71.8%	3.8%
3	0.2	-77.8%	-5.0%
4	1.3	-64.9%	-8.5%
5	0.5	-78.2%	-0.3%
6	0.2	-86.7%	4.9%
7	0.1	-80.7%	15.5%
8	0.0	-80.1%	14.7%
9	6.7	-67.0%	31.0%
10	10.6	-53.0%	18.3%
11	4.7	-50.9%	2.2%
12	17.6	-52.1%	-19.9%
13	14.0	-63.3%	-22.1%
14	0.1	-72.6%	-33.0%
15	3.1	-82.9%	-38.0%
16	0.0	-82.1%	-10.8%

