


光谱图

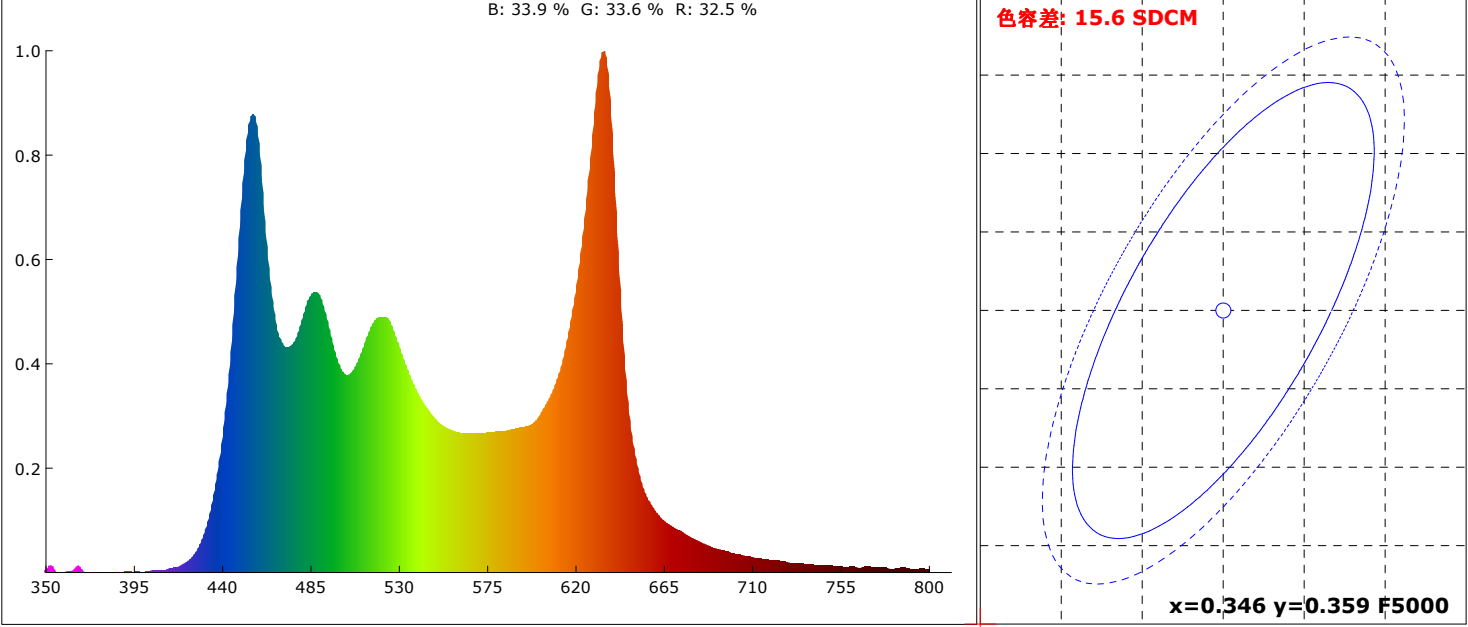

颜色参数:

坐标x: 0.3265 坐标y: 0.3137 坐标u: 0.2137 坐标v: 0.3080 坐标u': 0.2137 坐标v': 0.4620
红色比: 32.5 % 绿色比: 33.6 % 蓝色比: 33.9 % 光通量红色比: 22.2 % 光通量绿色比: 71.6 % 光通量蓝色比: 6.2 %

显色指数: 65.6 AvgR: 54.3
R1: 53.9 R2: 70.9 R3: 90.3 R4: 61.4 R5: 59.2 R6: 64.2 R7: 82.1 R8: 43.0
R9: -53.1 R10: 37.6 R11: 51.4 R12: 57.7 R13: 56.3 R14: 92.8 R15: 46.5


色温: 5817 K 光通量: 11739.832 lm 峰值波长: 634.5 nm 色容差: 15.6
明暗视觉比: 2.7 中心波长: 631.1 nm 主波长: 0.0 nm 质心波长: 549.4 nm
半宽度: 24.5 nm 色偏差: -0.01194 色纯度: 0.0 % 色质指数: 86.3
LER(TM-30): 259.8 辐射功率: 45181.2 mw 色域指数(Rg): 107.8 逼真度(Rf): 74.7
红光辐射功率: 14412.8 mw 近红辐射功率: 649.0 mw 远红辐射功率: 74.8 mw

电参数:

光效: 36.8 Lm/W 能效: 40.1 能效等级: G
电压: 219.5 V 电流: 1.997 A 功率: 319.100 W 功率因素: 0.728

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/16/14
备注:

Rf: 74.7 CCT: 5817K u': 0.2137
Rg: 107.8 LER: 259.8 Duv: -0.01194 v': 0.4620

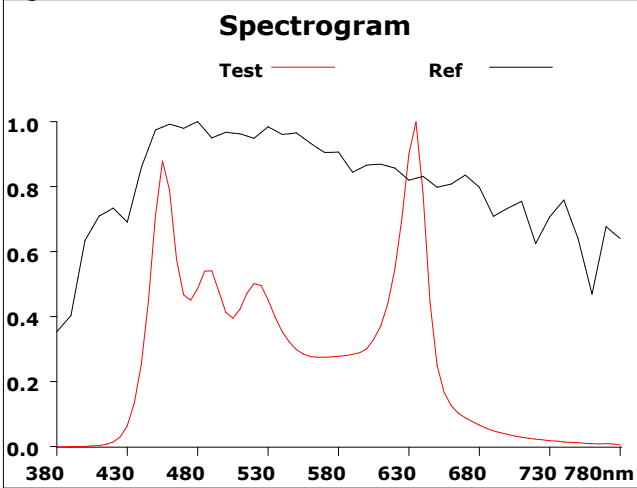

500			
Hue Bin	Rf	Chroma	Hue
1	64.3	16.1%	3.8%
2	71.9	14.1%	-7.2%
3	63.3	7.9%	-17.3%
4	69.4	-4.7%	-16.8%
5	74.3	-12.2%	-8.2%
6	85.0	-3.9%	7.3%
7	83.0	4.9%	9.3%
8	70.4	11.0%	11.7%
9	79.3	15.3%	5.6%
10	78.5	10.5%	-5.0%
11	77.5	7.9%	-8.9%
12	79.5	-0.3%	-12.5%
13	84.0	-4.2%	-3.7%
14	76.6	-4.0%	11.1%
15	71.5	11.7%	13.2%
16	72.3	9.3%	11.0%

