



光谱图

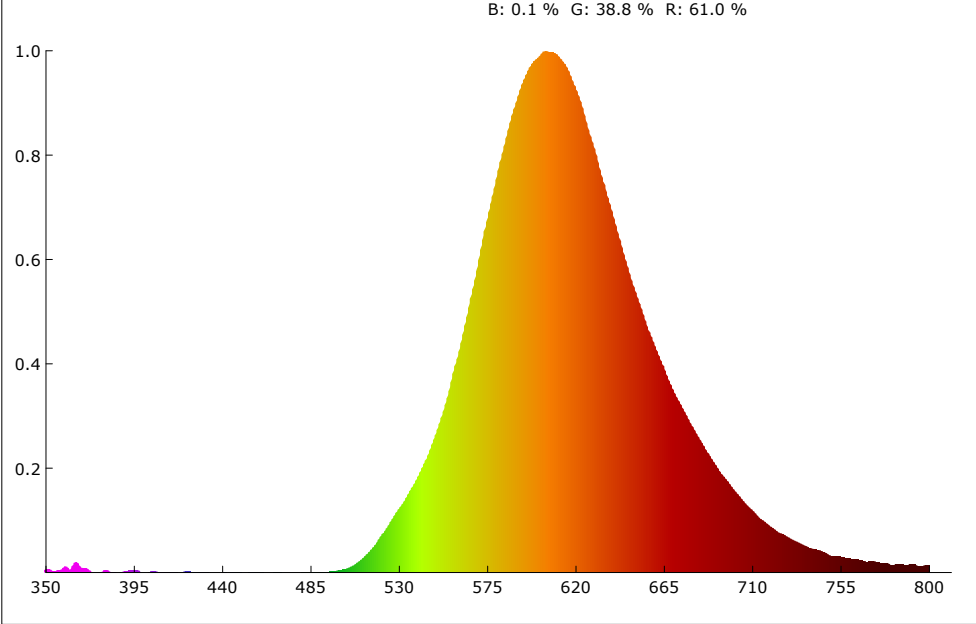

SDCM

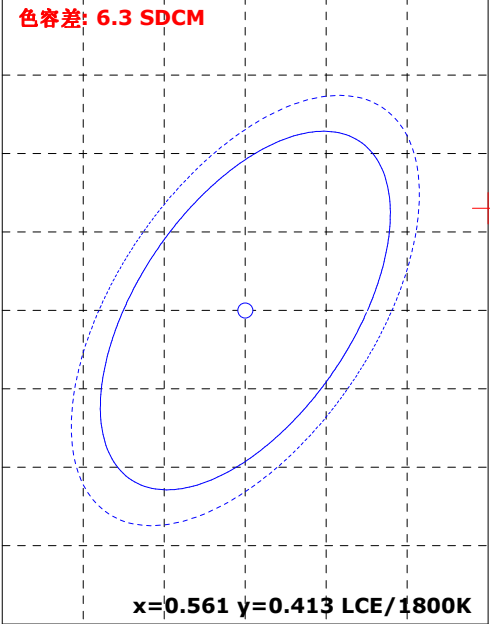

颜色参数:

坐标x: 0.5702      坐标y: 0.4265      坐标u: 0.3269      坐标v: 0.3667      坐标u': 0.3269      坐标v': 0.5501  
红色比: 61.0 %      绿色比: 38.8 %      蓝色比: 0.1 %      光通量红色比: 32.5 %      光通量绿色比: 67.5 %      光通量蓝色比: 0.0 %

显色指数: 52.7      AvgR: 40.7  
R1: 46.1      R2: 72.2      R3: 87.6      R4: 35.9      R5: 40.4      R6: 60.6      R7: 65.3      R8: 14.2  
R9: -70.1      R10: 43.4      R11: 16.6      R12: 18.1      R13: 48.3      R14: 93.6      R15: 38.9


色温: 1760 K      光通量: 2278.885 lm      峰值波长: 608.7 nm      色容差: 6.3  
明暗视觉比: 0.4      中心波长: 609.7 nm      主波长: 589.5 nm      质心波长: 616.6 nm  
半宽度: 89.0 nm      色偏差: 0.00638      色纯度: 99.2 %      色质指数: 9.0  
LER(TM-30): 323.0      辐射功率: 7054.3 mw      色域指数(Rg): 20.8      逼真度(Rf): 23.2  
红光辐射功率: 4075.9 mw      近红辐射功率: 335.2 mw      远红辐射功率: 21.7 mw

电参数:





光效: 40.3 Lm/W      能效: 43.9      能效等级: G  
电压: 220.4 V      电流: 0.418 A      功率: 56.520 W      功率因素: 0.613

产品型号:      制造厂商:Guangzhou Hotion Technology Co., Ltd  
产品编号:      测试单位:  
测试人员:      测试日期:07/16/14  
备注:


Rf: 23.2 CCT: 1760K u': 0.3269  
Rg: 20.8 LER: 323.0 Duv: 0.00638 v': 0.5501

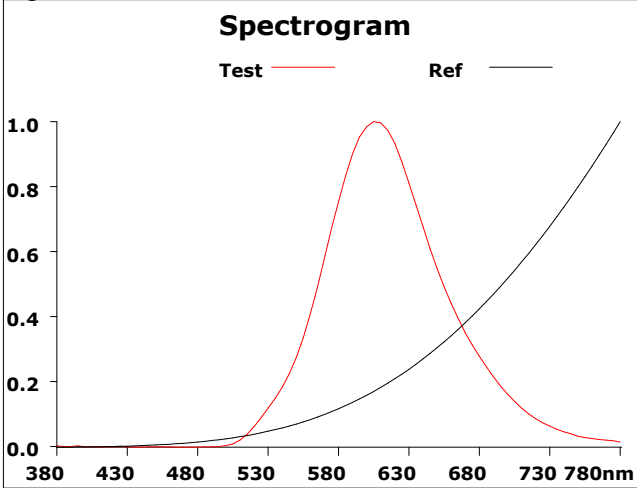

| 500     |      |        |        |
|---------|------|--------|--------|
| Hue Bin | Rf   | Chroma | Hue    |
| 1       | 37.8 | -24.0% | -15.1% |
| 2       | 13.4 | -37.0% | -29.7% |
| 3       | 0.2  | -59.0% | -33.5% |
| 4       | 8.9  | -74.6% | -16.1% |
| 5       | 37.0 | -78.1% | 7.4%   |
| 6       | 8.6  | -55.7% | 30.5%  |
| 7       | 23.6 | -38.4% | 26.3%  |
| 8       | 47.6 | -32.1% | 15.7%  |
| 9       | 42.1 | -23.8% | -13.3% |
| 10      | 18.8 | -39.6% | -22.9% |
| 11      | 9.1  | -52.5% | -18.9% |
| 12      | 5.8  | -62.0% | 6.4%   |
| 13      | 18.9 | -65.4% | 5.9%   |
| 14      | 36.7 | -61.2% | 13.6%  |
| 15      | 38.7 | -35.6% | 21.6%  |
| 16      | 49.5 | -27.1% | 7.0%   |

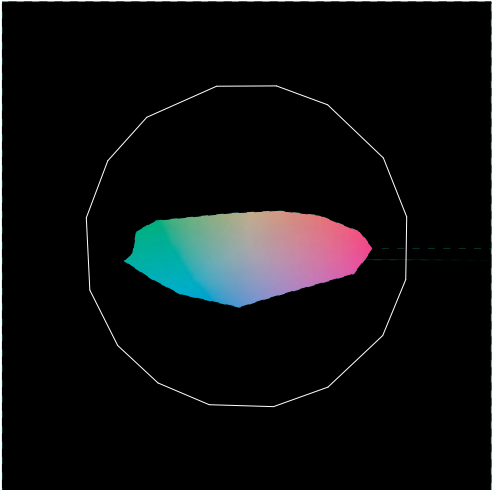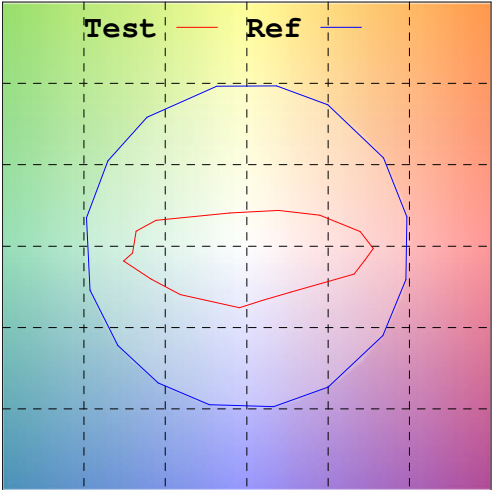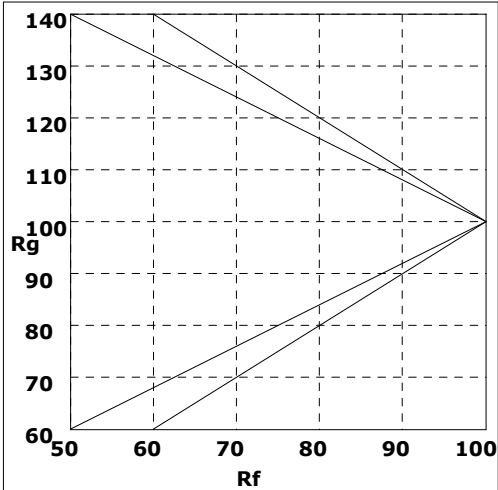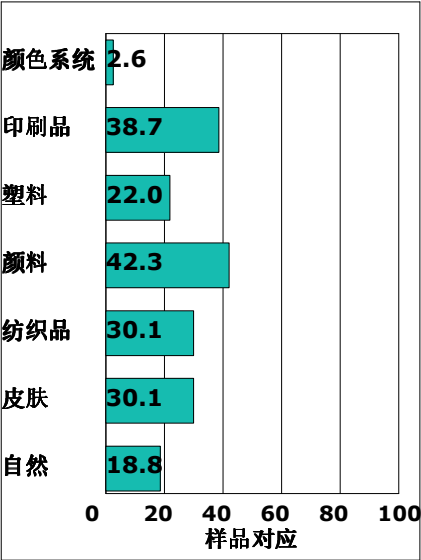

Rf by Bue

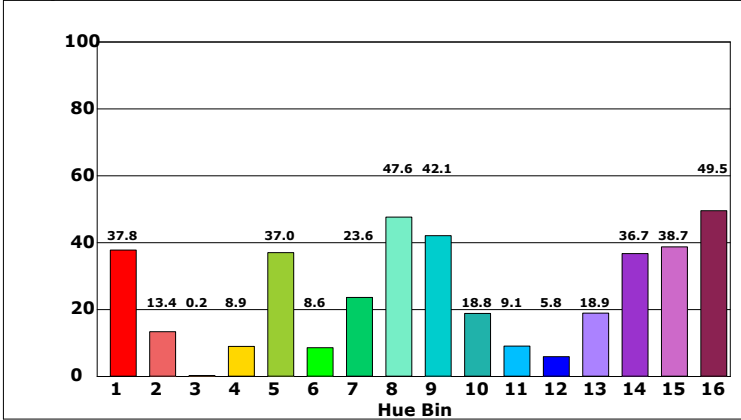

Chroma by Bue

