



光谱图

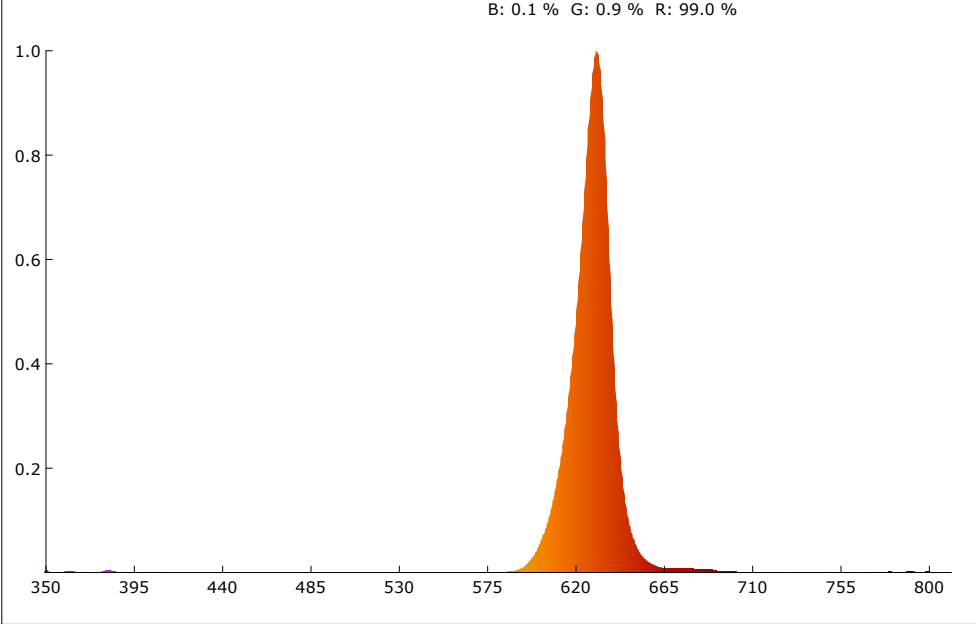

SDCM

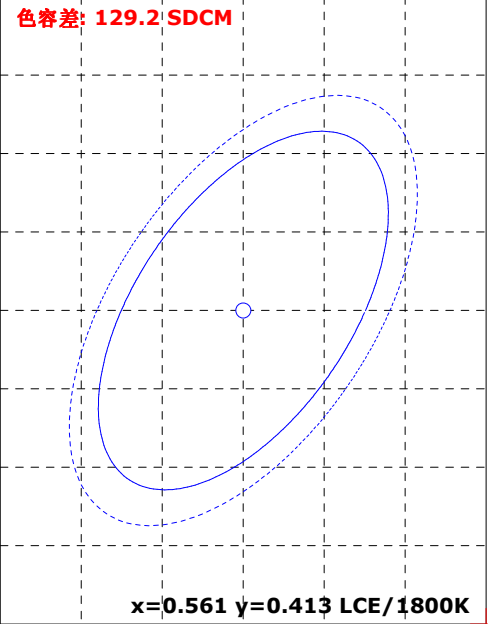

颜色参数:

坐标x: 0.6956 坐标y: 0.3032 坐标u: 0.5303 坐标v: 0.3467 坐标u': 0.5303 坐标v': 0.5201
红色比: 99.0 % 绿色比: 0.9 % 蓝色比: 0.1 % 光通量红色比: 97.3 % 光通量绿色比: 2.6 % 光通量蓝色比: 0.0 %

显色指数: 10.9 AvgR: 11.0
R1: 1.4 R2: 76.0 R3: 28.9 R4: -28.1 R5: 1.0 R6: 92.4 R7: -2.3 R8: -81.4
R9: -99.0 R10: 69.5 R11: -13.1 R12: 78.5 R13: 25.8 R14: 58.5 R15: -43.4


色温: 1000 K 光通量: 1862.856 lm 峰值波长: 630.5 nm 色容差: 129.2
明暗视觉比: 0.1 中心波长: 629.7 nm 主波长: 622.8 nm 质心波长: 628.4 nm
半宽度: 17.5 nm 色偏差: -0.00223 色纯度: 99.7 % 色质指数: -nan(ind)
LER(TM-30): 195.6 辐射功率: 9522.2 mw 色域指数(Rg): 28.4 逼真度(Rf): 5.3
红光辐射功率: 9325.9 mw 近红辐射功率: 38.6 mw 远红辐射功率: 21.5 mw

电参数:





光效: 31.3 Lm/W 能效: 34.1 能效等级: G
电压: 220.4 V 电流: 0.438 A 功率: 59.530 W 功率因素: 0.615

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/16/14
备注:


Rf: 5.3 CCT: 1000K u': 0.5303
Rg: 28.4 LER: 195.6 Duv: -0.023 v': 0.5201

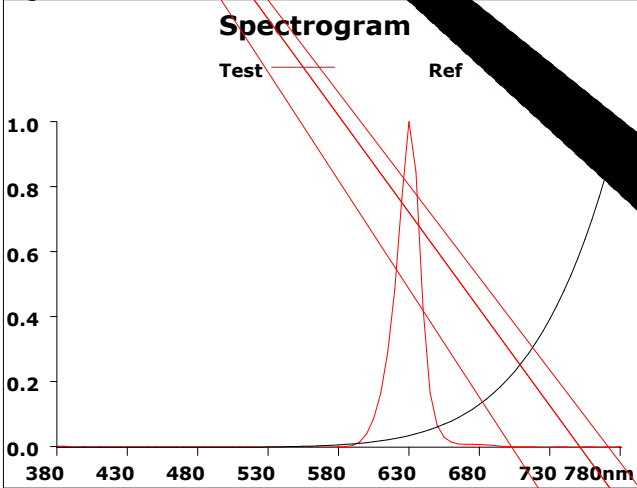


500			
Hue Bin	Rf	Chroma	Hue
1	1.3	-81.0%	26.3%
2	48.9	-64.8%	50.6%
3	73.2	-22.3%	65.1%
4	100.0	nan%	-nan(ind)%
5	95.2	-17.8%	0.3%
6	100.0	nan%	-nan(ind)%
7	65.0	-36.8%	-9.2%
8	1.1	-68.3%	-14.6%
9	0.4	-71.5%	18.2%
10		-69.8%	35.8%
11		-44.2%	40.6%
12	60.5	-5.6%	-64.1%
13	39.4	-1.1%	-42.0%
14	48.1	-1.1%	-28.2%
15	54.8	-6.1%	-10.2%
16	0.7	-68.0%	

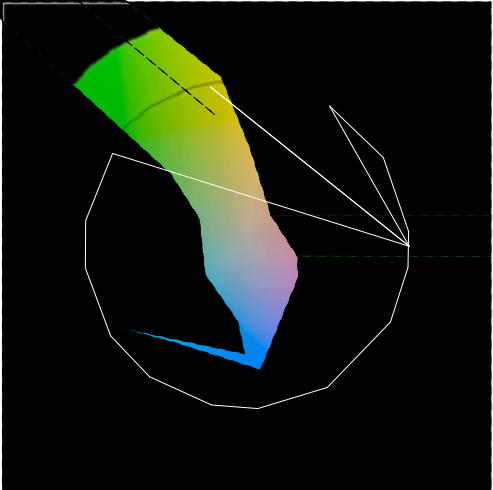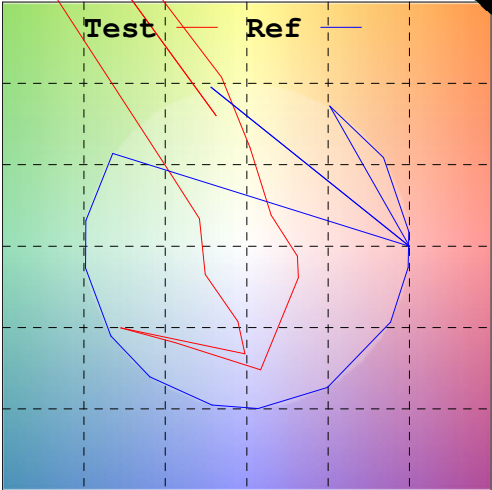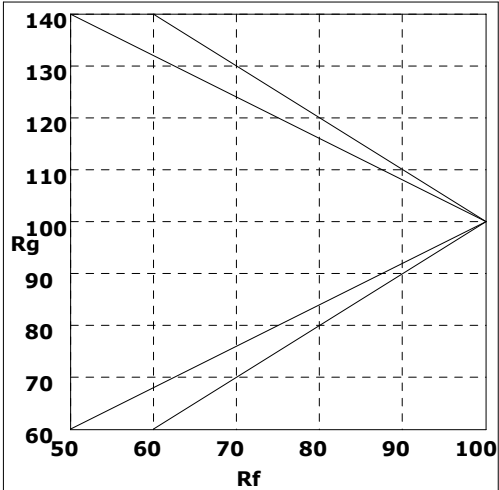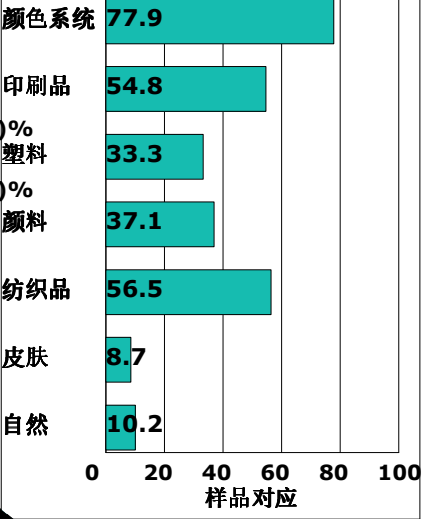

Rf by Bue

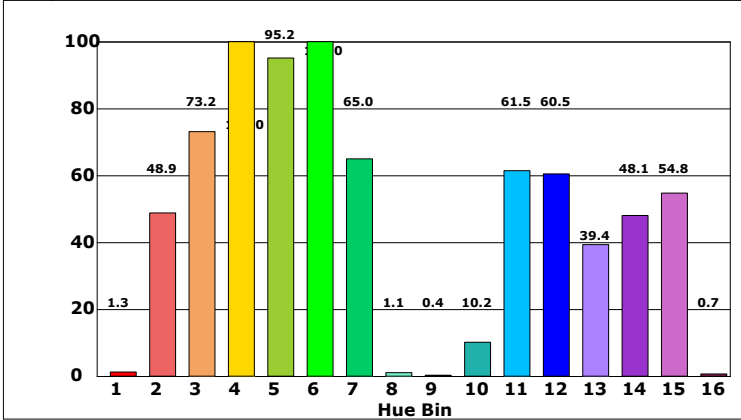

Chroma by Bue

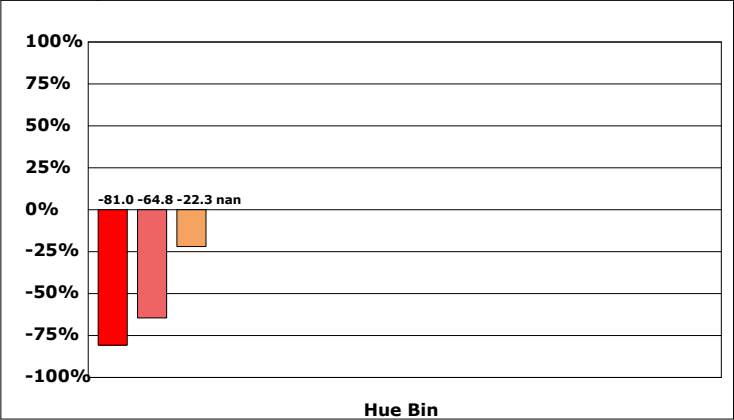

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173