



光谱图

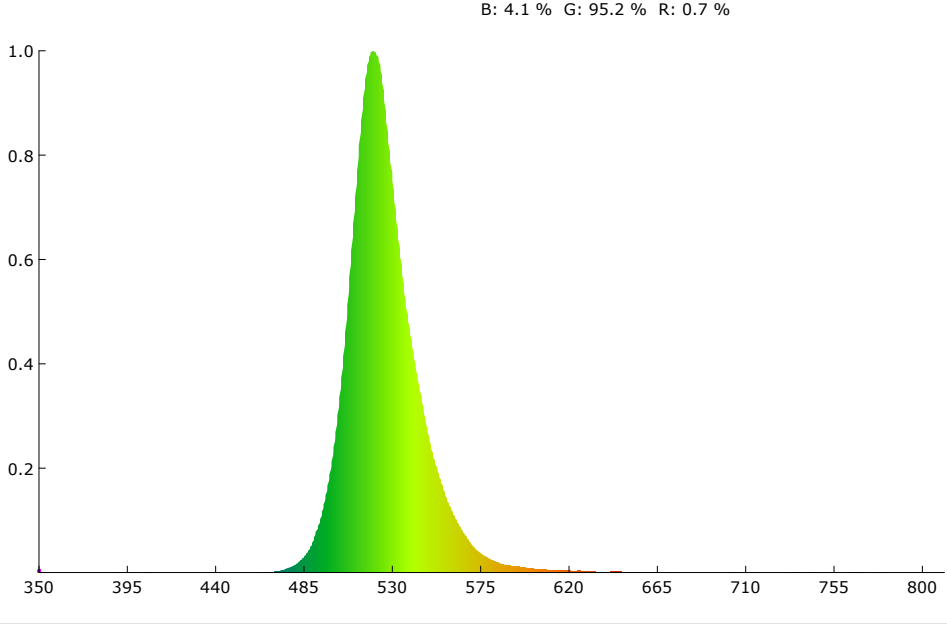

SDCM

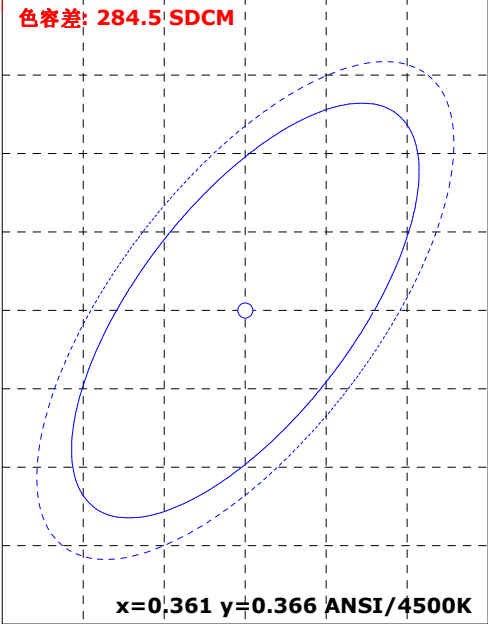

颜色参数:

坐标x: 0.1717 坐标y: 0.7396 坐标u: 0.0596 坐标v: 0.3848 坐标u': 0.0596 坐标v': 0.5772
红色比: 0.7 % 绿色比: 95.2 % 蓝色比: 4.1 % 光通量红色比: 0.3 % 光通量绿色比: 99.4 % 光通量蓝色比: 0.3 %

显色指数: -29.7 AvgR: -41.3
R1: -35.6 R2: -14.8 R3: -34.6 R4: -71.9 R5: -11.0 R6: -20.2 R7: -14.4 R8: -35.8
R9: -99.0 R10: -99.0 R11: -99.0 R12: -39.8 R13: -42.9 R14: 32.5 R15: -33.7


色温: 7725 K 光通量: 2516.455 lm 峰值波长: 520.6 nm 色容差: 284.5
明暗视觉比: 2.7 中心波长: 522.6 nm 主波长: 528.5 nm 质心波长: 527.0 nm
半宽度: 30.0 nm 色偏差: 0.15865 色纯度: 84.8 % 色质指数: 0.2
LER(TM-30): 501.4 辐射功率: 5018.8 mw 色域指数(Rg): 5.7 逼真度(Rf): 0.5
红光辐射功率: 35.5 mw 近红辐射功率: 6.3 mw 远红辐射功率: 0.6 mw

电参数:




光效: 46.3 Lm/W 能效: 50.4 能效等级: G
电压: 220.3 V 电流: 0.404 A 功率: 54.380 W 功率因素: 0.611

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/16/14
备注:


Rf: 0.5 CCT: 7725K u': 0.0596
Rg: 5.7 LER: 501.4 Duv: 0.15865 v': 0.5772

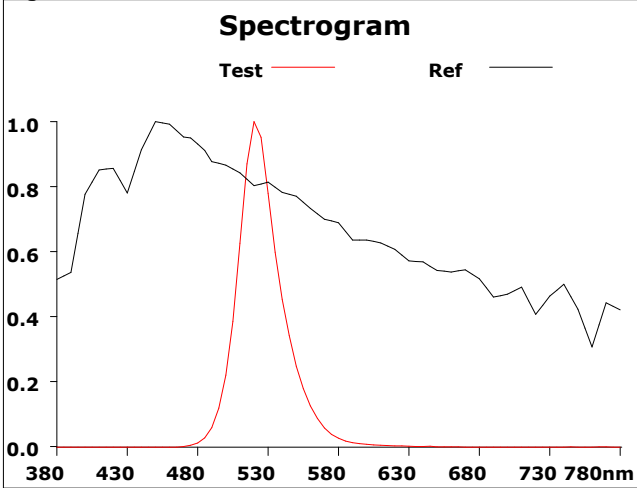

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-83.7%	3.0%
2	0.0	-71.8%	3.8%
3	0.2	-78.3%	-5.7%
4	1.1	-65.6%	-9.0%
5	0.4	-79.2%	-0.4%
6	0.2	-88.0%	5.6%
7	0.1	-81.6%	17.0%
8	0.0	-80.4%	14.0%
9	15.4	-65.4%	29.5%
10	10.6	-53.0%	17.9%
11	4.2	-51.6%	1.2%
12	16.0	-53.2%	-20.6%
13	12.5	-64.9%	-22.3%
14	0.1	-74.4%	-32.4%
15	2.9	-84.2%	-37.0%
16	0.0	-82.8%	-9.3%

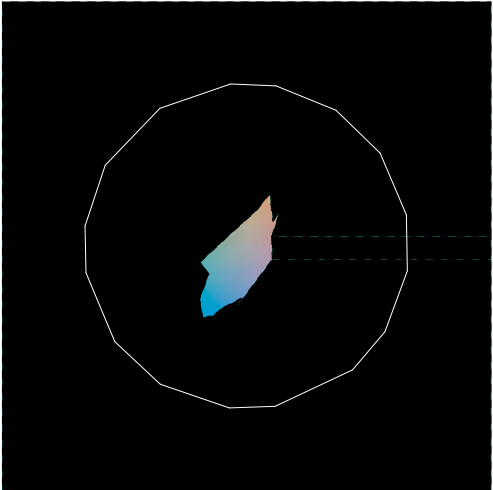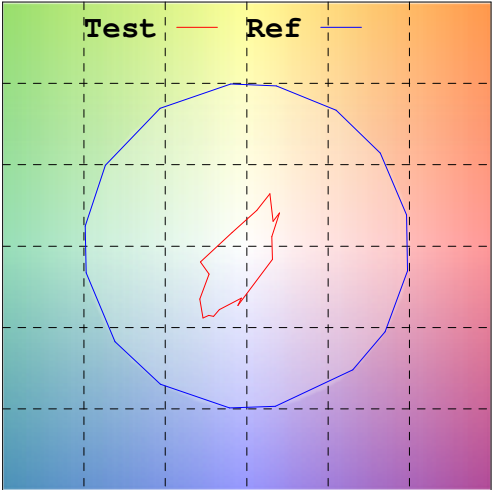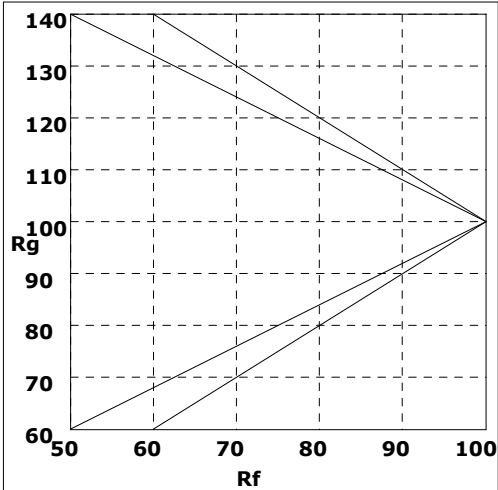

Rf by Bue

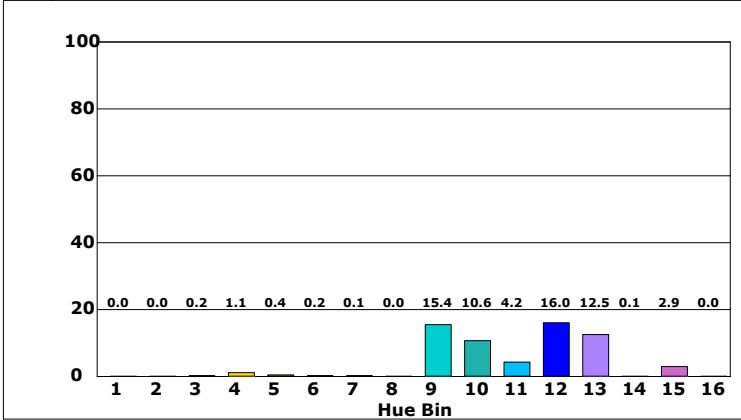

Chroma by Bue

