



光谱图

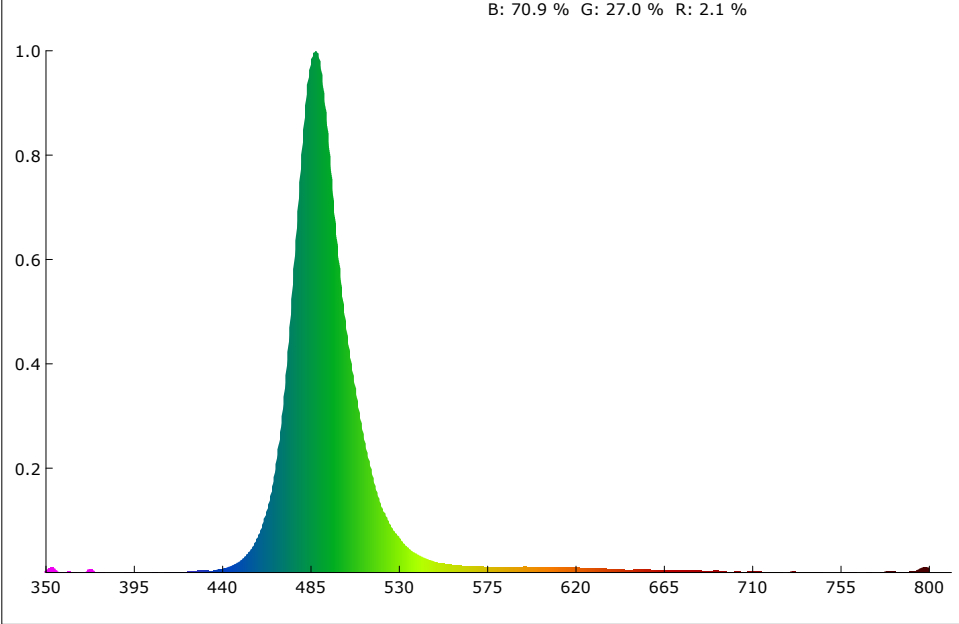

SDCM

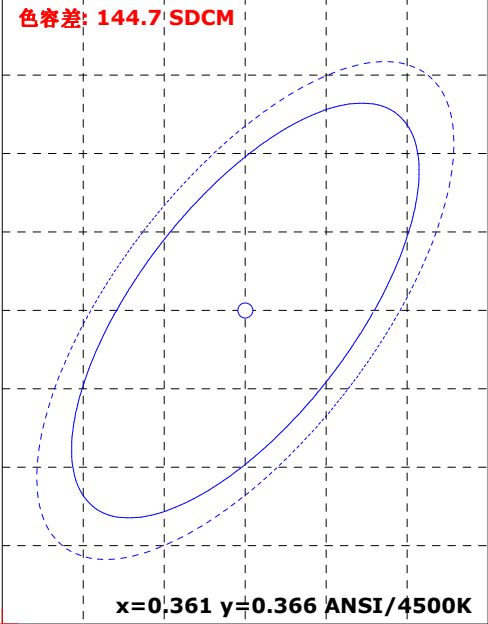

颜色参数:

坐标x: 0.1025 坐标y: 0.3089 坐标u: 0.0631 坐标v: 0.2851 坐标u': 0.0631 坐标v': 0.4277
红色比: 2.1 % 绿色比: 27.0 % 蓝色比: 70.9 % 光通量红色比: 1.8 % 光通量绿色比: 72.9 % 光通量蓝色比: 25.3 %

显色指数: -11.7 AvgR: -23.2
R1: 6.6 R2: -1.9 R3: -56.3 R4: -42.7 R5: 24.6 R6: -11.0 R7: -8.5 R8: -4.5
R9: -99.0 R10: -99.0 R11: -49.0 R12: -16.0 R13: -10.5 R14: 11.6 R15: 7.3


色温: 99999 K	光通量: 1387.544 lm	峰值波长: 487.6 nm	色容差: 144.7
明暗视觉比: 7.3	中心波长: 489.0 nm	主波长: 490.4 nm	质心波长: 497.1 nm
半宽度: 27.1 nm	色偏差: 0.00638	色纯度: 79.7 %	色质指数: 4.7
LER(TM-30): 191.3	辐射功率: 7254.4 mw	色域指数(Rg): 22.3	逼真度(Rf): 2.7
红光辐射功率: 148.6 mw	近红辐射功率: 24.7 mw	远红辐射功率: 20.1 mw	

电参数:

光效: 24.3 Lm/W	能效: 26.4	能效等级: G	
电压: 220.3 V	电流: 0.423 A	功率: 57.150 W	功率因素: 0.613

产品型号:	制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号:	测试单位:
测试人员:	测试日期:07/16/14
备注:	

Rf: 2.7 CCT: 99999K u': 0.0631
Rg: 22.3 LER: 191.3 Duv: 0.00638 v': 0.4277

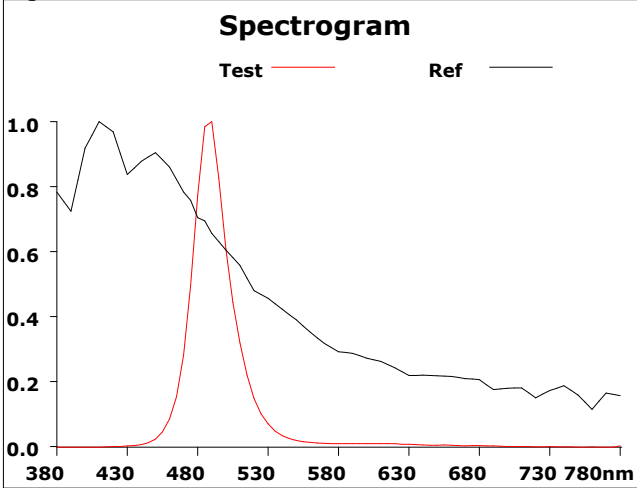

500			
Hue Bin	Rf	Chroma	Hue
1	3.9	-54.4%	-4.2%
2	0.1	-36.0%	-7.0%
3	7.0	-43.6%	-21.3%
4	0.4	-47.5%	-28.4%
5	0.2	-66.5%	-27.7%
6	6.0	-67.5%	-21.0%
7	1.2	-68.7%	-21.8%
8	11.5	-59.3%	1.4%
9	7.4	-45.8%	1.4%
10	14.7	-38.0%	-7.4%
11	1.1	-35.2%	-22.5%
12	21.1	-41.5%	-41.4%
13	1.1	-56.4%	-44.8%
14	0.4	-66.7%	-49.0%
15	5.8	-77.4%	-48.1%
16	0.4	-63.4%	-11.7%

