64-Lane 16-Port PCI Express® System Interconnect Switch

89HPES64H16
Data Sheet


Device Overview

The 89HPES64H16 is a member of the IDT PRECISE™ family of PCI Express® switching solutions. The PES64H16 is a 64-lane, 16-port system interconnect switch optimized for PCI Express packet switching in high-performance applications, supporting multiple simultaneous peer-to-peer traffic flows. Target applications include servers, storage, communications, and embedded systems.

Features

- **High Performance PCI Express Switch**
  - *Sixteen maximum switch ports*
    - Eight main ports each of which consists of 8 SerDes
    - Each x8 main port can further bifurcate to 2 x4-ports
  - *Sixty-four 2.5 Gbps embedded SerDes*
    - Supports pre-emphasis and receive equalization on per-port basis
  - *Delivers 256 Gbps (32 GBps) of aggregate switching capacity*
  - *Low-latency cut-through switch architecture*
  - *Support for Max Payload Size up to 2048 bytes*
  - *Supports two virtual channels and eight traffic classes*
  - *PCI Express Base Specification Revision 1.1 compliant*
- **Flexible Architecture with Numerous Configuration Options**
  - *Port arbitration schemes utilizing round robin algorithms*
  - *Virtual channels arbitration based on priority*
  - *Automatic per port link width negotiation to x8, x4, x2 or x1*
  - *Automatic lane reversal on all ports*
  - *Automatic polarity inversion on all lanes*
  - *Supports locked transactions, allowing use with legacy software*
  - *Ability to load device configuration from serial EEPROM*
  - *Ability to control device via SMBus*
- **Highly Integrated Solution**
  - *Requires no external components*
  - *Incorporates on-chip internal memory for packet buffering and queueing*
  - *Integrates sixty-four 2.5 Gbps embedded full duplex SerDes, 8B/10B encoder/decoder (no separate transceivers needed)*
- **Reliability, Availability, and Serviceability (RAS) Features**
  - *Redundant upstream port failover capability*
  - *Supports optional PCI Express end-to-end CRC checking*

Block Diagram

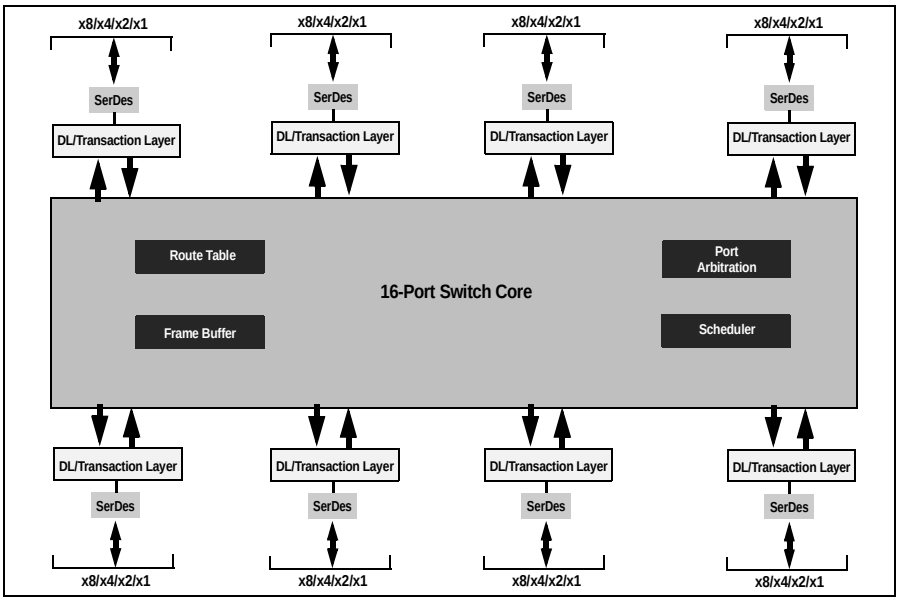

64 PCI Express Lanes
Up to 8 x8 ports or 16 x4 Ports

Figure 1 Internal Block Diagram

IDT and the IDT logo are registered trademarks of Integrated Device Technology, Inc.

© 2019 Renesas Electronics Corporation

- *Internal end-to-end parity protection on all TLPs ensures data integrity even in systems that do not implement end-to-end CRC (ECRC)*
- *Supports optional PCI Express Advanced Error Reporting*
- *Supports PCI Express Hot-Plug*
  - Compatible with Hot-Plug I/O expanders used on PC motherboards
- *Supports Hot-Swap*

◆ **Power Management**

- *Supports PCI Power Management Interface specification, Revision 1.1 (PCI-PM)*
  - Supports powerdown modes at the link level (L0, L0s, L1, L2/L3 Ready and L3) and at the device level (D0, $D3_{hot}$)
- *Unused SerDes disabled*

◆ **Testability and Debug Features**

- *Built in SerDes Pseudo-Random Bit Stream (PRBS) generator*
- *Ability to read and write any internal register via the SMBus*
- *Ability to bypass link training and force any link into any mode*
- *Provides statistics and performance counters*

◆ **Thirty-two General Purpose Input/Output pins**

- *Each pin may be individually configured as an input or output*
- *Each pin may be individually configured as an interrupt input*
- *Some pins have selectable alternate functions*

◆ **Packaged in a 35mm x 35mm 1156-ball Flip Chip BGA with 1mm ball spacing**

Product Description

Utilizing standard PCI Express interconnect, the PES64H16 provides the most efficient system interconnect switching for applications requiring high throughput, low latency, and simple board layout with a minimum number of board layers. It provides 256 Gbps of aggregated, full-duplex switching capacity through 64 integrated serial lanes, using proven and robust IDT technology. Each lane provides 2.5 Gbps of bandwidth in both directions and is fully compliant with PCI Express Base specification 1.1.

The PES64H16 is based on a flexible and efficient layered architecture. The PCI Express layer consists of SerDes, Physical, Data Link and Transaction layers. The PES64H16 can operate either as a store and forward switch or a cut-through switch and is designed to switch memory and I/O transactions. It supports eight Traffic Classes (TCs) and two Virtual Channels (VC) with sophisticated resource management to enable efficient switching and I/O connectivity.

SMBus Interface

The PES64H16 contains two SMBus interfaces. The slave interface provides full access to the configuration registers in the PES64H16, allowing every configuration register in the device to be read or written by an external agent. The master interface allows the default configuration register values of the PES64H16 to be overridden following a reset with values programmed in an external serial EEPROM. The master interface is also used by an external Hot-Plug I/O expander.

Six pins make up each of the two SMBus interfaces. These pins consist of an SMBus clock pin, an SMBus data pin, and 4 SMBus address pins. In the slave interface, these address pins allow the SMBus address to which the device responds to be configured. In the master interface, these address pins allow the SMBus address of the serial configuration EEPROM from which data is loaded to be configured. The SMBus address is set up on negation of PERSTN by sampling the corresponding address pins. When the pins are sampled, the resulting address is assigned as shown in Table 1.

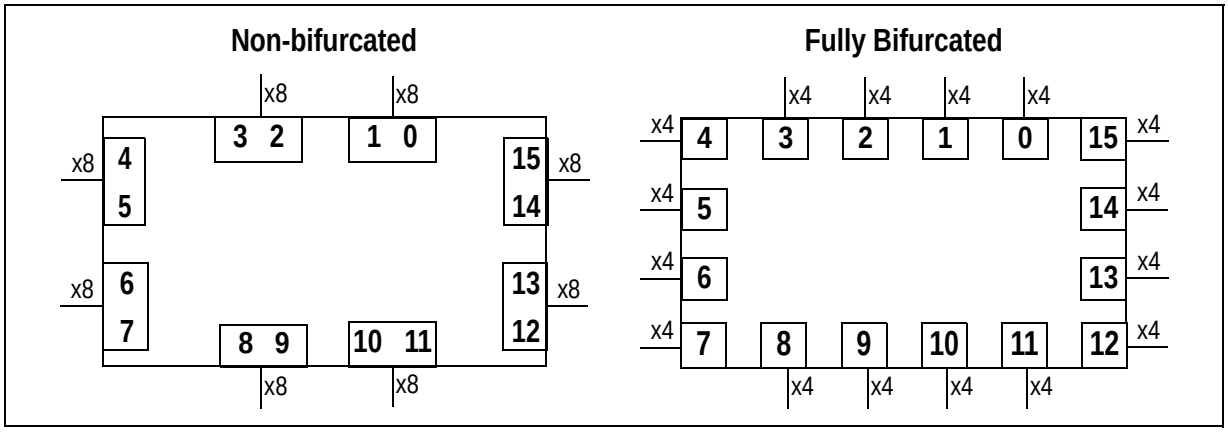


Figure 2 Port Configuration Examples

Note: The configurations in the above diagram show the maximum port widths. The PES64H16 can negotiate to narrower port widths — x4, x2, or x1.

© 2019 Renesas Electronics Corporation

Bit	Slave SMBus Address	Master SMBus Address
1	SSMBADDR[1]	MSMBADDR[1]
2	SSMBADDR[2]	MSMBADDR[2]
3	SSMBADDR[3]	MSMBADDR[3]
4	0	MSMBADDR[4]
5	SSMBADDR[5]	1
6	1	0
7	1	1

Table 1 Master and Slave SMBus Address Assignment

As shown in Figure 3, the master and slave SMBuses may be used in a unified or split configuration. In the unified configuration, shown in Figure 3(a), the master and slave SMBuses are tied together and the PES64H16 acts both as a SMBus master as well as a SMBus slave on this bus. This requires that the SMBus master or processor that has access to PES64H16 registers supports SMBus arbitration. In some systems, this SMBus master interface may be implemented using general purpose I/O pins on a processor or micro controller, and may not support SMBus arbitration. To support these systems, the PES64H16 may be configured to operate in a split configuration as shown in Figure 3(b).

In the split configuration, the master and slave SMBuses operate as two independent buses and thus multi-master arbitration is never required. The PES64H16 supports reading and writing of the serial EEPROM on the master SMBus via the slave SMBus, allowing in system programming of the serial EEPROM.

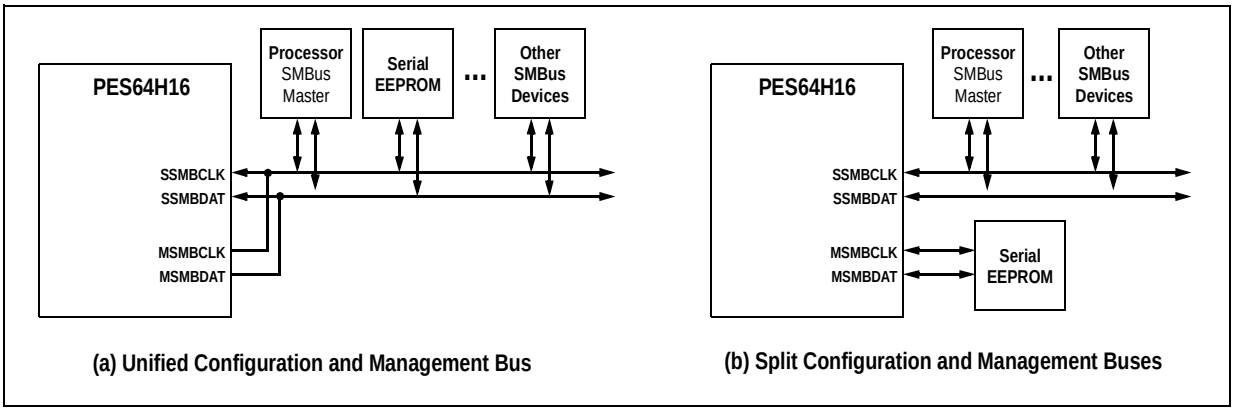


Figure 3 SMBus Interface Configuration Examples

Hot-Plug Interface

The PES64H16 supports PCI Express Hot-Plug on each downstream port (ports 1 through 15). To reduce the number of pins required on the device, the PES64H16 utilizes an external I/O expander, such as that used on PC motherboards, connected to the SMBus master interface. Following reset and configuration, whenever the state of a Hot-Plug output needs to be modified, the PES64H16 generates an SMBus transaction to the I/O expander with the new value of all of the outputs. Whenever a Hot-Plug input changes, the I/O expander generates an interrupt which is received on the IOEXPINTN input pin (alternate function of GPIO) of the PES64H16. In response to an I/O expander interrupt, the PES64H16 generates an SMBus transaction to read the state of all of the Hot-Plug inputs from the I/O expander.

General Purpose Input/Output

The PES64H16 provides 32 General Purpose I/O (GPIO) pins that may be individually configured as general purpose inputs, general purpose outputs, or alternate functions. Some GPIO pins are shared with other on-chip functions. These alternate functions may be enabled via software, SMBus slave interface, or serial configuration EEPROM.

© 2019 Renesas Electronics Corporation

Pin Description

The following tables lists the functions of the pins provided on the PES64H16. Some of the functions listed may be multiplexed onto the same pin. The active polarity of a signal is defined using a suffix. Signals ending with an "N" are defined as being active, or asserted, when at a logic zero (low) level. All other signals (including clocks, buses, and select lines) will be interpreted as being active, or asserted, when at a logic one (high) level. Differential signals end with a suffix "N" or "P." The differential signal ending in "P" is the positive portion of the differential pair and the differential signal ending in "N" is the negative portion of the differential pair.

Signal	Type	Name/Description
PE0RP[3:0] PE0RN[3:0]	I	**PCI Express Port 0 Serial Data Receive.** Differential PCI Express receive pairs for port 0. Port 0 is the upstream port.
PE0TP[3:0] PE0TN[3:0]	O	**PCI Express Port 0 Serial Data Transmit.** Differential PCI Express transmit pairs for port 0. Port 0 is the upstream port.
PE1RP[3:0] PE1RN[3:0]	I	**PCI Express Port 1 Serial Data Receive.** Differential PCI Express receive pairs for port 1. When port 0 is merged with port 1, these signals become port 0 receive pairs for lanes 4 through 7.
PE1TP[3:0] PE1TN[3:0]	O	**PCI Express Port 1 Serial Data Transmit.** Differential PCI Express transmit pairs for port 1. When port 0 is merged with port 1, these signals become port 0 transmit pairs for lanes 4 through 7.
PE2RP[3:0] PE2RN[3:0]	I	**PCI Express Port 2 Serial Data Receive.** Differential PCI Express receive pairs for port 2.
PE2TP[3:0] PE2TN[3:0]	O	**PCI Express Port 2 Serial Data Transmit.** Differential PCI Express transmit pairs for port 2.
PE3RP[3:0] PE3RN[3:0]	I	**PCI Express Port 3 Serial Data Receive.** Differential PCI Express receive pairs for port 3. When port 2 is merged with port 3, these signals become port 2 receive pairs for lanes 4 through 7.
PE3TP[3:0] PE3TN[3:0]	O	**PCI Express Port 3 Serial Data Transmit.** Differential PCI Express transmit pairs for port 2. When port 2 is merged with port 3, these signals become port 2 transmit pairs for lanes 4 through 7.
PE4RP[3:0] PE4RN[3:0]	I	**PCI Express Port 4 Serial Data Receive.** Differential PCI Express receive pairs for port 4.
PE4TP[3:0] PE4TN[3:0]	O	**PCI Express Port 4 Serial Data Transmit.** Differential PCI Express transmit pairs for port 4.
PE5RP[3:0] PE5RN[3:0]	I	**PCI Express Port 5 Serial Data Receive.** Differential PCI Express receive pairs for port 5. When port 4 is merged with port 5, these signals become port 4 receive pairs for lanes 4 through 7.
PE5TP[3:0] PE5TN[3:0]	O	**PCI Express Port 5 Serial Data Transmit.** Differential PCI Express transmit pairs for port 5. When port 4 is merged with port 5, these signals become port 4 transmit pairs for lanes 4 through 7.
PE6RP[3:0] PE6RN[3:0]	I	**PCI Express Port 6 Serial Data Receive.** Differential PCI Express receive pairs for port 6.
PE6TP[3:0] PE6TN[3:0]	O	**PCI Express Port 6 Serial Data Transmit.** Differential PCI Express transmit pairs for port 6.
PE7RP[3:0] PE7RN[3:0]	I	**PCI Express Port 7 Serial Data Receive.** Differential PCI Express receive pairs for port 7. When port 6 is merged with port 7, these signals become port 6 receive pairs for lanes 4 through 7.
PE7TP[3:0] PE7TN[3:0]	O	**PCI Express Port 7 Serial Data Transmit.** Differential PCI Express transmit pairs for port 7. When port 6 is merged with port 7, these signals become port 6 transmit pairs for lanes 4 through 7.

Table 2 PCI Express Interface Pins (Part 1 of 2)

© 2019 Renesas Electronics Corporation

Signal	Type	Name/Description
PE8RP[3:0] PE8RN[3:0]	I	**PCI Express Port 8 Serial Data Receive.** Differential PCI Express receive pairs for port 8.
PE8TP[3:0] PE8TN[3:0]	O	**PCI Express Port 8 Serial Data Transmit.** Differential PCI Express transmit pairs for port 8.
PE9RP[3:0] PE9RN[3:0]	I	**PCI Express Port 9 Serial Data Receive.** Differential PCI Express receive pairs for port 9. When port 8 is merged with port 9, these signals become port 8 receive pairs for lanes 4 through 7.
PE9TP[3:0] PE9TN[3:0]	O	**PCI Express Port 9 Serial Data Transmit.** Differential PCI Express transmit pairs for port 9. When port 8 is merged with port 9, these signals become port 8 transmit pairs for lanes 4 through 7.
PE10RP[3:0] PE10RN[3:0]	I	**PCI Express Port 10 Serial Data Receive.** Differential PCI Express receive pairs for port 10.
PE10TP[3:0] PE10TN[3:0]	O	**PCI Express Port 10 Serial Data Transmit.** Differential PCI Express transmit pairs for port 10.
PE11RP[3:0] PE11RN[3:0]	I	**PCI Express Port 11 Serial Data Receive.** Differential PCI Express receive pairs for port 11. When port 10 is merged with port 11, these signals become port 10 receive pairs for lanes 4 through 7.
PE11TP[3:0] PE11TN[3:0]	O	**PCI Express Port 11 Serial Data Transmit.** Differential PCI Express transmit pairs for port 11. When port 10 is merged with port 11, these signals become port 10 transmit pairs for lanes 4 through 7.
PE12RP[3:0] PE12RN[3:0]	I	**PCI Express Port 12 Serial Data Receive.** Differential PCI Express receive pairs for port 12.
PE12TP[3:0] PE12TN[3:0]	O	**PCI Express Port 12 Serial Data Transmit.** Differential PCI Express transmit pairs for port 12.
PE13RP[3:0] PE13RN[3:0]	I	**PCI Express Port 13 Serial Data Receive.** Differential PCI Express receive pairs for port 13. When port 12 is merged with port 13, these signals become port 12 receive pairs for lanes 4 through 7.
PE13TP[3:0] PE13TN[3:0]	O	**PCI Express Port 13 Serial Data Transmit.** Differential PCI Express transmit pairs for port 13. When port 12 is merged with port 13, these signals become port 12 transmit pairs for lanes 4 through 7.
PE14RP[3:0] PE14RN[3:0]	I	**PCI Express Port 14 Serial Data Receive.** Differential PCI Express receive pairs for port 14.
PE14TP[3:0] PE14TN[3:0]	O	**PCI Express Port 14 Serial Data Transmit.** Differential PCI Express transmit pairs for port 14.
PE15RP[3:0] PE15RN[3:0]	I	**PCI Express Port 15 Serial Data Receive.** Differential PCI Express receive pairs for port 15. When port 14 is merged with port 15, these signals become port 14 receive pairs for lanes 4 through 7.
PE15TP[3:0] PE15TN[3:0]	O	**PCI Express Port 15 Serial Data Transmit.** Differential PCI Express transmit pairs for port 15. When port 14 is merged with port 15, these signals become port 14 transmit pairs for lanes 4 through 7.
REFCLKM	I	**PCI Express Reference Clock Mode Select.** This signal selects the frequency of the reference clock input. 0x0 - 100 MHz 0x1 - 125 MHz
PEREFCLKP[3:0] PEREFCLKN[3:0]	I	**PCI Express Reference Clock.** Differential reference clock pair input. This clock is used as the reference clock by on-chip PLLs to generate the clocks required for the system logic and on-chip SerDes. The frequency of the differential reference clock is determined by the REFCLKM signal.

Table 2 PCI Express Interface Pins (Part 2 of 2)

© 2019 Renesas Electronics Corporation

Signal	Type	Name/Description
MSMBADDR[4:1]	I	**Master SMBus Address.** These pins determine the SMBus address of the serial EEPROM from which configuration information is loaded.
MSMBCLK	I/O	**Master SMBus Clock.** This bidirectional signal is used to synchronize transfers on the master SMBus. It is active and generating the clock only when the EEPROM or I/O Expanders are being accessed.
MSMBDAT	I/O	**Master SMBus Data.** This bidirectional signal is used for data on the master SMBus.
SSMBADDR[5,3:1]	I	**Slave SMBus Address.** These pins determine the SMBus address to which the slave SMBus interface responds.
SSMBCLK	I/O	**Slave SMBus Clock.** This bidirectional signal is used to synchronize transfers on the slave SMBus.
SSMBDAT	I/O	**Slave SMBus Data.** This bidirectional signal is used for data on the slave SMBus.

Table 3 SMBus Interface Pins

Signal	Type	Name/Description
GPIO[0]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin.
GPIO[1]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin.
GPIO[2]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin.
GPIO[3]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin.
GPIO[4]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin.
GPIO[5]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: GPEN Alternate function pin type: Output Alternate function: General Purpose Event (GPE) output
GPIO[6]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P1RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 1
GPIO[7]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P2RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 2
GPIO[8]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P3RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 3

Table 4 General Purpose I/O Pins (Part 1 of 4)

© 2019 Renesas Electronics Corporation

Signal	Type	Name/Description
GPIO[9]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P4RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 4
GPIO[10]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P5RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 5
GPIO[11]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P6RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 6
GPIO[12]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P7RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 7
GPIO[13]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P8RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 8
GPIO[14]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P9RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 9
GPIO[15]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P10RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 10
GPIO[16]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P11RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 11
GPIO[17]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P12RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 12
GPIO[18]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P13RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 13

Table 4 General Purpose I/O Pins (Part 2 of 4)

© 2019 Renesas Electronics Corporation

Signal	Type	Name/Description
GPIO[19]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P14RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 14
GPIO[20]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: P15RSTN Alternate function pin type: Output Alternate function: Reset output for downstream port 15
GPIO[21]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: IOEXPINTN0 Alternate function pin type: Input Alternate function: SMBus I/O expander interrupt 0
GPIO[22]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: IOEXPINTN1 Alternate function pin type: Input Alternate function: SMBus I/O expander interrupt 1
GPIO[23]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: IOEXPINTN2 Alternate function pin type: Input Alternate function: SMBus I/O expander interrupt 2
GPIO[24]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: IOEXPINTN3 Alternate function pin type: Input Alternate function: SMBus I/O expander interrupt 3
GPIO[25]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: IOEXPINTN4 Alternate function pin type: Input Alternate function: SMBus I/O expander interrupt 4
GPIO[26]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: IOEXPINTN5 Alternate function pin type: Input Alternate function: SMBus I/O expander interrupt 5
GPIO[27]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: IOEXPINTN6 Alternate function pin type: Input Alternate function: SMBus I/O expander interrupt 6
GPIO[28]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: IOEXPINTN7 Alternate function pin type: Input Alternate function: SMBus I/O expander interrupt 7

Table 4 General Purpose I/O Pins (Part 3 of 4)

© 2019 Renesas Electronics Corporation

Signal	Type	Name/Description
GPIO[29]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin.
GPIO[30]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin.
GPIO[31]	I/O	**General Purpose I/O.** This pin can be configured as a general purpose I/O pin. Alternate function pin name: IOEXPINTN10 Alternate function pin type: Input Alternate function: SMBus I/O expander interrupt 10

Table 4 General Purpose I/O Pins (Part 4 of 4)

Signal	Type	Name/Description
CCLKDS	I	**Common Clock Downstream.** When the CCLKDS pin is asserted, it indicates that a common clock is being used between the downstream device and the downstream port.
CCLKUS	I	**Common Clock Upstream.** When the CCLKUS pin is asserted, it indicates that a common clock is being used between the upstream device and the upstream port.
MSMBSMODE	I	**Master SMBus Slow Mode.** The assertion of this pin indicates that the master SMBus should operate at 100 KHz instead of 400 KHz. This value may not be overridden.
P01MERGEN	I	**Port 0 and 1 Merge.** P01MERGEN is an active low signal. It is pulled low internally via a 251K ohm resistor. When this pin is low, port 0 is merged with port 1 to form a single x8 port. The Serdes lanes associated with port 1 become lanes 4 through 7 of port 0. When this pin is high, port 0 and port 1 are not merged, and each operates as a single x4 port.
P23MERGEN	I	**Port 2 and 3 Merge.** P23MERGEN is an active low signal. It is pulled low internally via a 251K ohm resistor. When this pin is low, port 2 is merged with port 3 to form a single x8 port. The Serdes lanes associated with port 3 become lanes 4 through 7 of port 2. When this pin is high, port 2 and port 3 are not merged, and each operates as a single x4 port.
P45MERGEN	I	**Port 4 and 5 Merge.** P45MERGEN is an active low signal. It is pulled low internally via a 251K ohm resistor. When this pin is low, port 4 is merged with port 5 to form a single x8 port. The Serdes lanes associated with port 5 become lanes 4 through 7 of port 4. When this pin is high, port 4 and port 5 are not merged, and each operates as a single x4 port.
P67MERGEN	I	**Port 6 and 7 Merge.** P67MERGEN is an active low signal. It is pulled low internally via a 251K ohm resistor. When this pin is low, port 6 is merged with port 7 to form a single x8 port. The Serdes lanes associated with port 7 become lanes 4 through 7 of port 6. When this pin is high, port 6 and port 7 are not merged, and each operates as a single x4 port.
P89MERGEN	I	**Port 8 and 9 Merge.** P89MERGEN is an active low signal. It is pulled low internally via a 251K ohm resistor. When this pin is low, port 8 is merged with port 9 to form a single x8 port. The Serdes lanes associated with port 9 become lanes 4 through 7 of port 8. When this pin is high, port 8 and port 9 are not merged, and each operates as a single x4 port.
P1011MERGEN	I	**Port 10 and 11 Merge.** P67MERGEN is an active low signal. It is pulled low internally via a 251K ohm resistor. When this pin is low, port 10 is merged with port 11 to form a single x8 port. The Serdes lanes associated with port 11 become lanes 4 through 7 of port 10. When this pin is high, port 10 and port 11 are not merged, and each operates as a single x4 port.

Table 5 System Pins (Part 1 of 2)

© 2019 Renesas Electronics Corporation

Signal	Type	Name/Description
P1213MERGEN	I	**Port 12 and 13 Merge.** P1213MERGEN is an active low signal. It is pulled low internally via a 251K ohm resistor. When this pin is low, port 12 is merged with port13 to form a single x8 port. The Serdes lanes associated with port 13 become lanes 4 through 7 of port 12. When this pin is high, port 12 and port 13 are not merged, and each operates as a single x4 port.
P1415MERGEN	I	**Port 14 and 15 Merge.** P1415MERGEN is an active low signal. It is pulled low internally via a 251K ohm resistor. When this pin is low, port 14 is merged with port 15 to form a single x8 port. The Serdes lanes associated with port 15 become lanes 4 through 7 of port 14. When this pin is high, port 14 and port 15 are not merged, and each operates as a single x4 port.
PERSTN	I	**Fundamental Reset.** Assertion of this signal resets all logic inside the PES64H16 and initiates a PCI Express fundamental reset.
RSTHALT	I	**Reset Halt.** When this signal is asserted during a PCI Express fundamental reset, the PES64H16 executes the reset procedure and remains in a reset state with the Master and Slave SMBuses active. This allows software to read and write registers internal to the device before normal device operation begins. The device exits the reset state when the RSTHALT bit is cleared in the PA_SWCTL register by an SMBus master.
SWMODE[3:0]	I	**Switch Mode.** These configuration pins determine the PES64H16 switch operating mode. These pins should be static and not change following the negation of PERSTN. 0x0 - Normal switch mode 0x1 - Normal switch mode with Serial EEPROM initialization 0x2 through 0x7 - Reserved 0x8 - Normal switch mode with upstream port failover (port 0 selected as the upstream port) 0x9 - Normal switch mode with upstream port failover (port 2 selected as the upstream port) 0xA - Normal switch mode with Serial EEPROM initialization and upstream port failover (port 0 selected as the upstream port) 0xB - Normal switch mode with Serial EEPROM initialization and upstream port failover (port 2 selected as the upstream port) 0xC through 0xF - Reserved

Table 5 System Pins (Part 2 of 2)

Signal	Type	Name/Description
JTAG_TCK	I	**JTAG Clock**. This is an input test clock used to clock the shifting of data into or out of the boundary scan logic or JTAG Controller. JTAG_TCK is independent of the system clock with a nominal 50% duty cycle.
JTAG_TDI	I	**JTAG Data Input**. This is the serial data input to the boundary scan logic or JTAG Controller.
JTAG_TDO	O	**JTAG Data Output**. This is the serial data shifted out from the boundary scan logic or JTAG Controller. When no data is being shifted out, this signal is tri-stated.
JTAG_TMS	I	**JTAG Mode**. The value on this signal controls the test mode select of the boundary scan logic or JTAG Controller.
JTAG_TRST_N	I	**JTAG Reset**. This active low signal asynchronously resets the boundary scan logic and JTAG TAP Controller. An external pull-up on the board is recommended to meet the JTAG specification in cases where the tester can access this signal. However, for systems running in functional mode, one of the following should occur: 1) actively drive this signal low with control logic 2) statically drive this signal low with an external pull-down on the board

Table 6 Test Pins

© 2019 Renesas Electronics Corporation

Signal	Type	Name/Description
V_{DD}CORE	I	**Core VDD.** Power supply for core logic.
V_{DD}IO	I	**I/O VDD.** LVTTL I/O buffer power supply.
V_{DD}PE	I	**PCI Express Digital Power.** PCI Express digital power used by the digital power of the SerDes.
V_{DD}APE	I	**PCI Express Analog Power.** PCI Express analog power used by the PLL and bias generator.
V_{SS}	I	Ground.
V_{TT}PE		**PCI Express Serial Data Transmit Termination Voltage.** This pin allows the driver termination voltage to be set, enabling the system designer to control the Common Mode Voltage and output voltage swing of the corresponding PCI Serial Data Transmit differential pair.

Table 7 Power and Ground Pins

© 2019 Renesas Electronics Corporation

Pin Characteristics

Note: Some input pads of the PES64H16 do not contain internal pull-ups or pull-downs. Unused inputs should be tied off to appropriate levels. This is especially critical for unused control signal inputs which, if left floating, could adversely affect operation. Also, any input pin left floating can cause a slight increase in power consumption.

Function	Pin Name	Type	Buffer	I/O Type	Internal Resistor	Notes
PCI Express Interface	PE0RN[3:0]	I	CML	Serial Link		
	PE0RP[3:0]	I				
	PE0TN[3:0]	O				
	PE0TP[3:0]	O				
	PE1RN[3:0]	I				
	PE1RP[3:0]	I				
	PE1TN[3:0]	O				
	PE1TP[3:0]	O				
	PE2RN[3:0]	I				
	PE2RP[3:0]	I				
	PE2TN[3:0]	O				
	PE2TP[3:0]	O				
	PE3RN[3:0]	I				
	PE3RP[3:0]	I				
	PE3TN[3:0]	O				
	PE3TP[3:0]	O				
	PE4RN[3:0]	I				
	PE4RP[3:0]	I				
	PE4TN[3:0]	O				
	PE4TP[3:0]	O				
	PE5RN[3:0]	I				
	PE5RP[3:0]	I				
	PE5TN[3:0]	O				
	PE5TP[3:0]	O				
	PE6RN[3:0]	I				
	PE6RP[3:0]	I				
	PE6TN[3:0]	O				
	PE6TP[3:0]	O				
	PE7RN[3:0]	I				
	PE7RP[3:0]	I				
	PE7TN[3:0]	O				
	PE7TP[3:0]	O				
	PE8RN[3:0]	I				

Table 8 Pin Characteristics (Part 1 of 3)

© 2019 Renesas Electronics Corporation

Function	Pin Name	Type	Buffer	I/O Type	Internal Resistor	Notes
PCI Express Interface (cont.)	PE8RP[3:0]	I	CML	Serial Link		
	PE8TN[3:0]	O				
	PE8TP[3:0]	O				
	PE9RN[3:0]	I				
	PE9RP[3:0]	I				
	PE9TN[3:0]	O				
	PE9TP[3:0]	O				
	PE10RN[3:0]	I				
	PE10RP[3:0]	I				
	PE10TN[3:0]	O				
	PE10TP[3:0]	O				
	PE11RN[3:0]	I				
	PE11RP[3:0]	I				
	PE11TN[3:0]	O				
	PE11TP[3:0]	O				
	PE12RN[3:0]	I				
	PE12RP[3:0]	I				
	PE12TN[3:0]	O				
	PE12TP[3:0]	O				
	PE13RN[3:0]	I				
	PE13RP[3:0]	I				
	PE13TN[3:0]	O				
	PE13TP[3:0]	O				
	PE14RN[3:0]	I				
	PE14RP[3:0]	I				
	PE14TN[3:0]	O				
	PE14TP[3:0]	O				
	PE15RN[3:0]	I				
	PE15RP[3:0]	I				
	PE15TN[3:0]	O				
	PE15TP[3:0]	O				
	PEREFCLKN[3:0]	I	LVPECL/ CML	Diff. Clock Input		Refer to Table 9
	PEREFCLKP[3:0]	I				
	REFCLKM	I	LVTTL	Input	pull-down	

Table 8 Pin Characteristics (Part 2 of 3)

© 2019 Renesas Electronics Corporation

Function	Pin Name	Type	Buffer	I/O Type	Internal Resistor	Notes
SMBus	MSMBADDR[4:1]	I	LVTTL		pull-up	
	MSMBCLK	I/O		STI[1]		
	MSMBDAT	I/O		STI		
	SSMBADDR[5,3:1]	I			pull-up	
	SSMBCLK	I/O		STI		
	SSMBDAT	I/O		STI		
General Purpose I/O	GPIO[31:0]	I/O	LVTTL		pull-up	
System Pins	CCLKDS	I	LVTTL	Input	pull-up	
	CCLKUS	I			pull-up	
	MSMBSMODE	I			pull-down	
	P01MERGEN	I			pull-down	
	P23MERGEN	I			pull-down	
	P45MERGEN	I			pull-down	
	P67MERGEN	I			pull-down	
	P89MERGEN	I			pull-down	
	P1011MERGEN	I			pull-down	
	P1213MERGEN	I			pull-down	
	P1415MERGEN	I			pull-down	
	PERSTN	I				
	RSTHALT	I			pull-down	
	SWMODE[3:0]	I			pull-down	
EJTAG / JTAG	JTAG_TCK	I	LVTTL	STI	pull-up	
	JTAG_TDI	I		STI	pull-up	
	JTAG_TDO	O				
	JTAG_TMS	I		STI	pull-up	
	JTAG_TRST_N	I		STI	pull-up	External pull-down

Table 8 Pin Characteristics (Part 3 of 3)

1. Schmitt Trigger Input (STI).

© 2019 Renesas Electronics Corporation

Logic Diagram — PES64H16

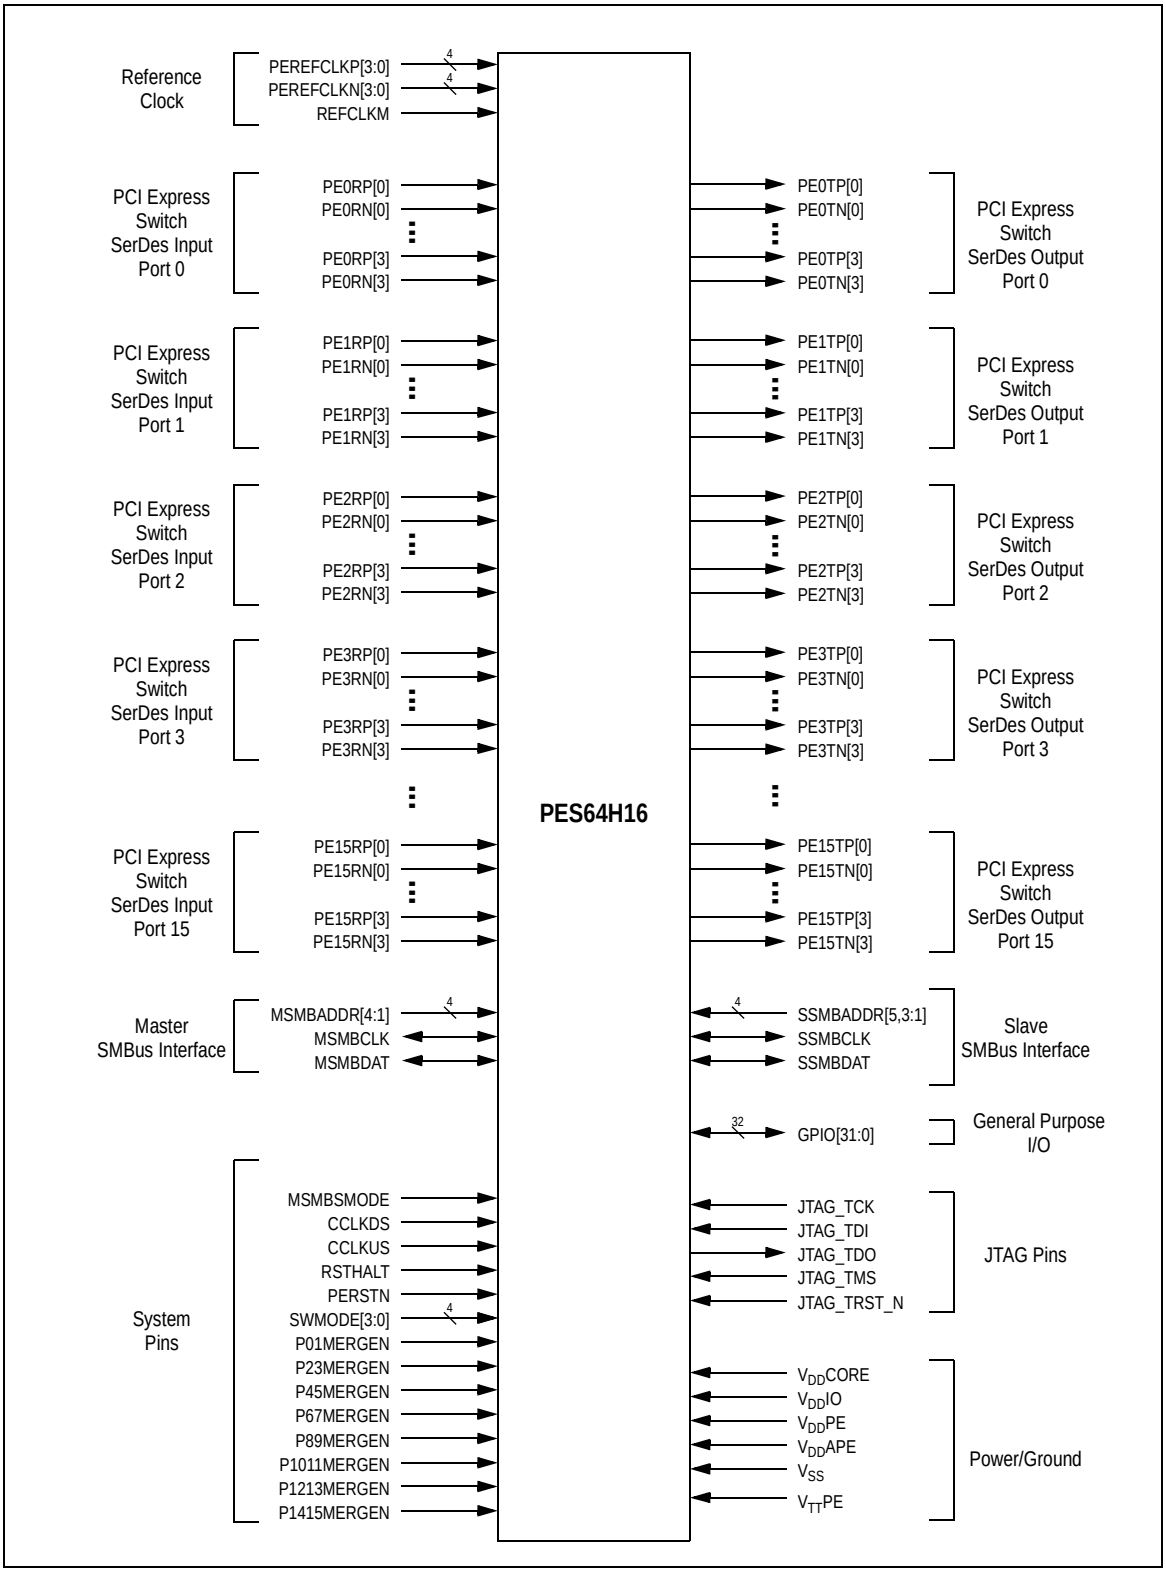


Figure 4 PES64H16 Logic Diagram

© 2019 Renesas Electronics Corporation

System Clock Parameters

Values based on systems running at recommended supply voltages and operating temperatures, as shown in Tables 13 and 15.

Parameter	Description	Min	Typical	Max	Unit
PEREFCLK					
$Refclk_{FREQ}$	Input reference clock frequency range	100		125[1]	MHz
$Refclk_{DC}$[2]	Duty cycle of input clock	40	50	60	%
T_R, T_F	Rise/Fall time of input clocks			0.2*RCUI	RCUI[3]
V_{SW}	Differential input voltage swing[4]	0.6		1.6	V
T_{jitter}	Input clock jitter (cycle-to-cycle)			125	ps
R_T	Termination Resistor		110		Ohms

Table 9 Input Clock Requirements

1. The input clock frequency will be either 100 or 125 MHz depending on signal REFCLKM.
2. ClkIn must be AC coupled. Use 0.01 — 0.1 µF ceramic capacitors.
3. RCUI (Reference Clock Unit Interval) refers to the reference clock period.
4. AC coupling required.

AC Timing Characteristics

Parameter	Description	Min[1]	Typical[1]	Max[1]	Units
PCIe Transmit					
UI	Unit Interval	399.88	400	400.12	ps
T_{TX-EYE}	Minimum Tx Eye Width	0.7	.9		UI
$T_{TX-EYE-MEDIAN-to-MAX-JITTER}$	Maximum time between the jitter median and maximum deviation from the median			0.15	UI
$T_{TX-RISE}$, $T_{TX-FALL}$	D+ / D- Tx output rise/fall time	50	90		ps
$T_{TX- IDLE-MIN}$	Minimum time in idle	50			UI
$T_{TX-IDLE-SET-TO-IDLE}$	Maximum time to transition to a valid Idle after sending an Idle ordered set			20	UI
$T_{TX-IDLE-TO-DIFF-DATA}$	Maximum time to transition from valid idle to diff data			20	UI
$T_{TX-SKEW}$	Transmitter data skew between any 2 lanes		500	1300	ps
PCIe Receive					
UI	Unit Interval	399.88	400	400.12	ps
$T_{RX-EYE (with jitter)}$	Minimum Receiver Eye Width (jitter tolerance)	0.4			UI
$T_{RX-EYE-MEDIUM TO MAX JITTER}$	Max time between jitter median & max deviation			0.3	UI
$T_{RX-IDLE-DET-DIFF-ENTER TIME}$	Unexpected Idle Enter Detect Threshold Integration Time			10	ms
$T_{RX-SKEW}$	Lane to lane input skew			20	ns

Table 10 PCIe AC Timing Characteristics

1. Minimum, Typical, and Maximum values meet the requirements under PCI Specification 1.1

© 2019 Renesas Electronics Corporation

Signal	Symbol	Reference Edge	Min	Max	Unit	Timing Diagram Reference
GPIO						
GPIO[31:0][1]	Tpw_13b[2]	None	50	—	ns	See Figure 5.

Table 11 GPIO AC Timing Characteristics

1. GPIO signals must meet the setup and hold times if they are synchronous or the minimum pulse width if they are asynchronous.
2. The values for this symbol were determined by calculation, not by testing.

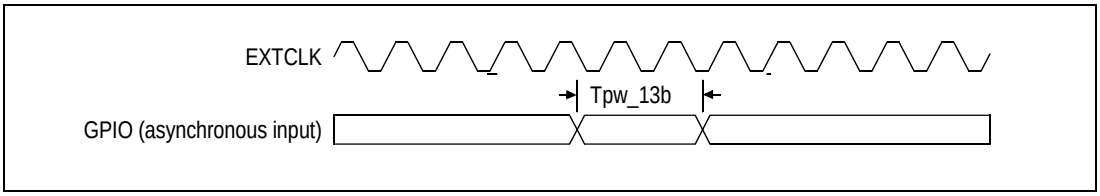


Figure 5 GPIO AC Timing Waveform

Signal	Symbol	Reference Edge	Min	Max	Unit	Timing Diagram Reference
JTAG						
JTAG_TCK	Tper_16a	none	50.0	—	ns	See Figure 6.
	Thigh_16a, Tlow_16a		10.0	25.0	ns	
JTAG_TMS[1], JTAG_TDI	Tsu_16b	JTAG_TCK rising	2.4	—	ns	
	Thld_16b		1.0	—	ns	
JTAG_TDO	Tdo_16c	JTAG_TCK falling	—	20	ns	
	Tdz_16c[2]		—	20	ns	
JTAG_TRST_N	Tpw_16d[2]	none	25.0	—	ns	

Table 12 JTAG AC Timing Characteristics

1. The JTAG specification, IEEE 1149.1, recommends that JTAG_TMS should be held at 1 while the signal applied at JTAG_TRST_N changes from 0 to 1. Otherwise, a race may occur if JTAG_TRST_N is deasserted (going from low to high) on a rising edge of JTAG_TCK when JTAG_TMS is low, because the TAP controller might go to either the Run-Test/Idle state or stay in the Test-Logic-Reset state.
2. The values for this symbol were determined by calculation, not by testing.

© 2019 Renesas Electronics Corporation

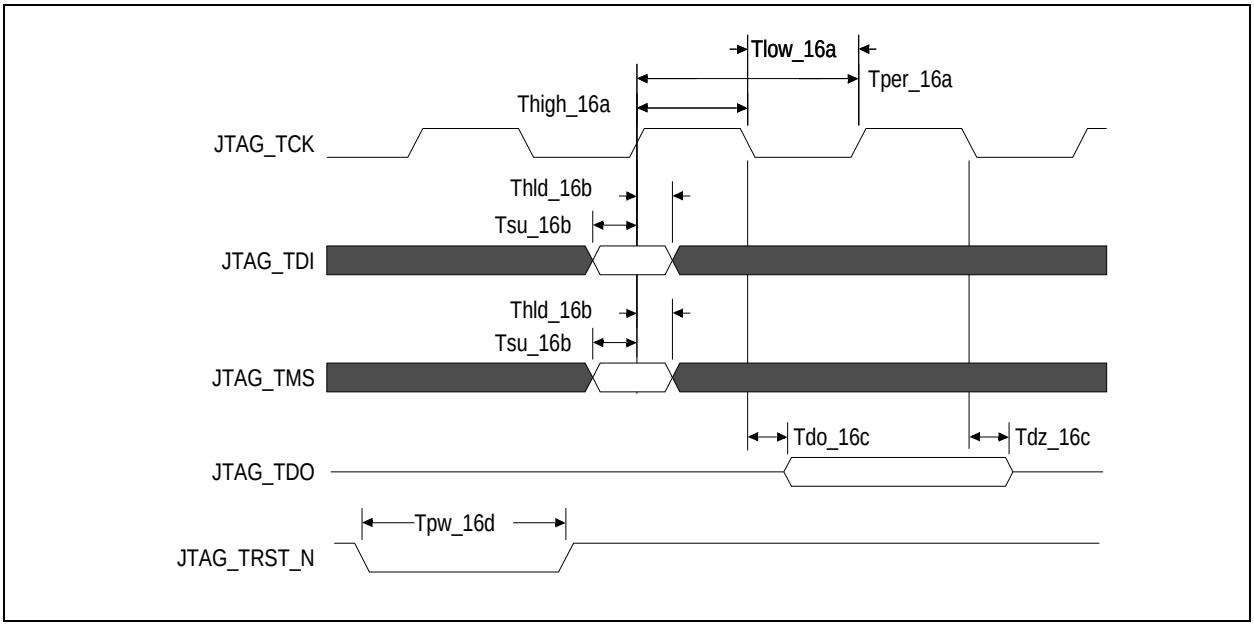


Figure 6 JTAG AC Timing Waveform

Recommended Operating Supply Voltages

Symbol	Parameter	Minimum	Typical	Maximum	Unit
V_{DD}CORE	Internal logic supply	0.9	1.0	1.1	V
V_{DD}I/O	I/O supply except for SerDes LVPECL/CML	3.0	3.3	3.6	V
V_{DD}PE	PCI Express Digital Power	0.9	1.0	1.1	V
V_{DD}APE	PCI Express Analog Power	0.9	1.0	1.1	V
V_{TT}PE	PCI Express Serial Data Transmit Termination Voltage	1.425	1.5	1.575	V
V_{SS}	Common ground	0	0	0	V

Table 13 PES64H16 Operating Voltages

Absolute Maximum Voltage Rating

V_{DD}Core	V_{DD}PE	V_{DD}APE	V_{TT}PE	V_{DD}I/O
1.5V	1.5V	1.5V	2.5V	5.0V

Table 14 PES64H16 Absolute Maximum Voltage Rating

Warning: For proper and reliable operation in adherence with this data sheet, the device should not exceed the recommended operating voltages in Table 13. The absolute maximum operating voltages in Table 14 are offered to provide guidelines for voltage excursions outside the recommended voltage ranges. Device functionality is not guaranteed at these conditions and sustained operation at these values or any exposure to voltages outside the maximum range may adversely affect device functionality and reliability.

© 2019 Renesas Electronics Corporation

Power-Up Sequence

This section describes the sequence in which various voltages must be applied to the part during power-up to ensure proper functionality. For the PES64H16, the power-up sequence must be as follows:

1. V_{DD}I/O — 3.3V
2. V_{DD}Core, V_{DD}PE, V_{DD}APE — 1.0V
3. V_{TT}PE — 1.5V

When powering up, each voltage level must ramp and stabilize prior to applying the next voltage in the sequence to ensure internal latch-up issues are avoided. There are no maximum time limitations in ramping to valid power levels. The power-down sequence must be in the reverse order of the power-up sequence.

Recommended Operating Temperature

Grade	Temperature
Commercial	0°C to +70°C Ambient
Industrial	-40°C to +85°C Ambient

Table 15 PES64H16 Operating Temperatures

Power Consumption

Typical power is measured under the following conditions: 25°C Ambient, 35% total link usage on all ports, typical voltages defined in Table 13 (and also listed below).

Maximum power is measured under the following conditions: 70°C Ambient, 85% total link usage on all ports, maximum voltages defined in Table 13 (and also listed below).

Number of active Lanes per Port		Core Supply		PCIe Digital Supply		PCIe Analog Supply		PCIe Termination Supply		I/O Supply		Total	
		Typ 1.0V	Max 1.1V	Typ 1.0V	Max 1.1V	Typ 1.0V	Max 1.1V	Typ 1.5V	Max 1.575V	Typ 3.3V	Max 3.6V	Typ Power	Max Power
8/8/8/8/8/8/8/8	**mA**	2900	3600	2892	3470	1157	1500	1482	2000	5	5	9.18W	12.57W
	Watts	2.9	3.96	2.89	3.81	1.16	1.65	2.22	3.15	0.018	0.02		

Table 16 PES64H16 Power Consumption

© 2019 Renesas Electronics Corporation

Thermal Considerations

This section describes thermal considerations for the PES64H16 ($35mm^2$ FCBGA1156 package). The data in Table 17 below contains information that is relevant to the thermal performance of the PES64H16 switch.

Symbol	Parameter	Value	Units	Conditions
$T_{J(max)}$	Junction Temperature	125	^{0}C	Maximum
$T_{A(max)}$	Ambient Temperature	70	^{0}C	Maximum
$\theta_{JA(effective)}$	Effective Thermal Resistance, Junction-to-Ambient	12.6	^{0}C/W	Zero air flow
		6.4	^{0}C/W	1 m/S air flow
		5.4	^{0}C/W	2 m/S air flow
θ_{JB}	Thermal Resistance, Junction-to-Board	2.1	^{0}C/W	
θ_{JC}	Thermal Resistance, Junction-to-Case	0.1	^{0}C/W	
P	Power Dissipation of the Device	12.57	Watts	Maximum

Table 17 Thermal Specifications for PES64H16, 35x35mm FCBGA1156 Package

Note: It is important for the reliability of this device in any user environment that the junction temperature not exceed the $T_{J(max)}$ value specified in Table 17. Consequently, the effective junction to ambient thermal resistance (θ_{JA}) for the worst case scenario must be maintained below the value determined by the formula:

$$\theta_{JA} = (T_{J(max)} - T_{A(max)})/P$$

Given that the values of $T_{J(max)}$, $T_{A(max)}$, and P are known, the value of desired θ_{JA} becomes a known entity to the system designer. How to achieve the desired θ_{JA} is left up to the board or system designer, but in general, it can be achieved by adding the effects of θ_{JC} (value provided in Table 17), thermal resistance of the chosen adhesive (θ_{CS}), that of the heat sink (θ_{SA}), amount of airflow, and properties of the circuit board (number of layers and size of the board). As a general guideline, this device will not need a heat sink if the board has 10 or more layers AND the board size is larger than 4"x12" AND airflow in excess of 1 m/s is available. It is strongly recommended that users perform their own thermal analysis for their own board and system design scenarios.

© 2019 Renesas Electronics Corporation

DC Electrical Characteristics

Values based on systems running at recommended supply voltages, as shown in Table 13.

Note: See Table 8, Pin Characteristics, for a complete I/O listing.

I/O Type	Parameter	Description	Min[1]	Typ[1]	Max[1]	Unit	Conditions
Serial Link	**PCIe Transmit**						
	$V_{TX-DIFFp-p}$	Differential peak-to-peak output voltage	800		1200	mV	
	$V_{TX-DE-RATIO}$	De-emphasized differential output voltage	-3		-4	dB	
	$V_{TX-DC-CM}$	DC Common mode voltage	-0.1	1	3.7	V	
	$V_{TX-CM-ACP}$	RMS AC peak common mode output voltage			20	mV	
	$V_{TX-CM-DC-active-idle-delta}$	Abs delta of DC common mode voltage between L0 and idle			100	mV	
	$V_{TX-CM-DC-line-delta}$	Abs delta of DC common mode voltage between D+ and D-			25	mV	
	$V_{TX-Idle-DiffP}$	Electrical idle diff peak output			20	mV	
	$V_{TX-RCV-Detect}$	Voltage change during receiver detection			600	mV	
	$RL_{TX-DIFF}$	Transmitter Differential Return loss	12			dB	
	RL_{TX-CM}	Transmitter Common Mode Return loss	6			dB	
	$Z_{TX-DEFF-DC}$	DC Differential TX impedance	80	100	120	Ω	
	Z_{OSE}	Single ended TX Impedance	40	50	60	Ω	
	Transmitter Eye Diagram	TX Eye Height (De-emphasized bits)	505	650		mV	
	Transmitter Eye Diagram	TX Eye Height (Transition bits)	800	950		mV	
	PCIe Receive						
	$V_{RX-DIFFp-p}$	Differential input voltage (peak-to-peak)	175		1200	mV	
	$V_{RX-CM-AC}$	Receiver common-mode voltage for AC coupling			150	mV	
	$RL_{RX-DIFF}$	Receiver Differential Return Loss	15			dB	
	RL_{RX-CM}	Receiver Common Mode Return Loss	6			dB	
	$Z_{RX-DIFF-DC}$	Differential input impedance (DC)	80	100	120	Ω	
	$Z_{RX-COMM-DC}$	Single-ended input impedance	40	50	60	Ω	
	$Z_{RX-COMM-HIGH-Z-DC}$	Powered down input common mode impedance (DC)	200k	350k		Ω	
	$V_{RX-IDLE-DET-DIFFp-p}$	Electrical idle detect threshold	65		175	mV	
PCIe REFCLK							
	C_{IN}	Input Capacitance	1.5	—		pF	

Table 18 DC Electrical Characteristics (Part 1 of 2)

© 2019 Renesas Electronics Corporation

I/O Type	Parameter	Description	Min[1]	Typ[1]	Max[1]	Unit	Conditions
Other I/Os							
LOW Drive Output	I_{OL}		—	2.5	—	mA	V_{OL} = 0.4v
	I_{OH}		—	-5.5	—	mA	V_{OH} = 1.5V
High Drive Output	I_{OL}		—	12.0	—	mA	V_{OL} = 0.4v
	I_{OH}		—	-20.0	—	mA	V_{OH} = 1.5V
Schmitt Trigger Input (STI)	V_{IL}		-0.3	—	0.8	V	—
	V_{IH}		2.0	—	V_{DD}IO + 0.5	V	—
Input	V_{IL}		-0.3	—	0.8	V	—
	V_{IH}		2.0	—	V_{DD}IO + 0.5	V	—
Capacitance	C_{IN}		—	—	8.5	pF	—
Leakage	Inputs		—	—	± 10	µA	V_{DD}I/O (max)
	$I/O_{LEAK\ W/O}$ Pull-ups/downs		—	—	± 10	µA	V_{DD}I/O (max)
	$I/O_{LEAK\ WITH}$ Pull-ups/downs		—	—	± 80	µA	V_{DD}I/O (max)

Table 18 DC Electrical Characteristics (Part 2 of 2)

1. Minimum, Typical, and Maximum values meet the requirements under PCI Specification 1.0a.

© 2019 Renesas Electronics Corporation

Package Pinout — 1156-BGA Signal Pinout for PES64H16

The following table lists the pin numbers and signal names for the PES64H16 device.

Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt
A1	V_{SS}		B1	V_{SS}		C1	GPIO_29		D1	GPIO_28	1
A2	V_{SS}		B2	$V_{DD}IO$		C2	GPIO_27	1	D2	GPIO_26	1
A3	GPIO_19	1	B3	GPIO_18	1	C3	GPIO_21	1	D3	$V_{DD}IO$	
A4	$V_{DD}IO$		B4	GPIO_17	1	C4	GPIO_16	1	D4	GPIO_23	1
A5	V_{SS}		B5	V_{SS}		C5	V_{SS}		D5	V_{SS}	
A6	PE9TP03		B6	PE9TN03		C6	V_{SS}		D6	PE9RP03	
A7	PE9TP02		B7	PE9TN02		C7	V_{SS}		D7	PE9RP02	
A8	V_{SS}		B8	V_{SS}		C8	V_{SS}		D8	V_{SS}	
A9	PE9TP01		B9	PE9TN01		C9	V_{SS}		D9	PE9RP01	
A10	PE9TP00		B10	PE9TN00		C10	V_{SS}		D10	PE9RP00	
A11	V_{SS}		B11	V_{SS}		C11	V_{SS}		D11	V_{SS}	
A12	PE8TP03		B12	PE8TN03		C12	V_{SS}		D12	PE8RP03	
A13	PE8TP02		B13	PE8TN02		C13	V_{SS}		D13	PE8RP02	
A14	V_{SS}		B14	V_{SS}		C14	V_{SS}		D14	V_{SS}	
A15	PE8TP01		B15	PE8TN01		C15	V_{SS}		D15	PE8RP01	
A16	PE8TP00		B16	PE8TN00		C16	V_{SS}		D16	PE8RP00	
A17	V_{SS}		B17	V_{SS}		C17	V_{SS}		D17	V_{SS}	
A18	PE3TP03		B18	PE3TN03		C18	V_{SS}		D18	PE3RP03	
A19	PE3TP02		B19	PE3TN02		C19	V_{SS}		D19	PE3RP02	
A20	V_{SS}		B20	V_{SS}		C20	V_{SS}		D20	V_{SS}	
A21	PE3TP01		B21	PE3TN01		C21	V_{SS}		D21	PE3RP01	
A22	PE3TP00		B22	PE3TN00		C22	V_{SS}		D22	PE3RP00	
A23	V_{SS}		B23	V_{SS}		C23	V_{SS}		D23	V_{SS}	
A24	PE2TP03		B24	PE2TN03		C24	V_{SS}		D24	PE2RP03	
A25	PE2TP02		B25	PE2TN02		C25	V_{SS}		D25	PE2RP02	
A26	V_{SS}		B26	V_{SS}		C26	V_{SS}		D26	V_{SS}	
A27	PE2TP01		B27	PE2TN01		C27	V_{SS}		D27	PE2RP01	
A28	PE2TP00		B28	PE2TN00		C28	V_{SS}		D28	PE2RP00	
A29	V_{SS}		B29	V_{SS}		C29	V_{SS}		D29	V_{SS}	
A30	$V_{DD}IO$		B30	MSMBADDR_3		C30	MSMBADDR_4		D30	JTAG_TMS	
A31	MSMBADDR_1		B31	MSMBADDR_2		C31	JTAG_TDI		D31	$V_{DD}IO$	
A32	MSMBSMODE		B32	PERSTN		C32	JTAG_TRST_N		D32	SSMBADDR_5	
A33	V_{SS}		B33	$V_{DD}IO$		C33	SSMBADDR_2		D33	SSMBADDR_3	
A34	V_{SS}		B34	V_{SS}		C34	SSMBADDR_1		D34	$V_{DD}IO$	

Table 19 PES64H16 1156-pin Signal Pin-Out (Part 1 of 9)

© 2019 Renesas Electronics Corporation

Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt
E1	$V_{DD}IO$		F1	V_{SS}		G1	PE10TP00		H1	PE10TP01	
E2	GPIO_30		F2	V_{SS}		G2	PE10TN00		H2	PE10TN01	
E3	GPIO_31	1	F3	V_{SS}		G3	V_{SS}		H3	V_{SS}	
E4	GPIO_24	1	F4	V_{SS}		G4	PE10RP00		H4	PE10RP01	
E5	V_{SS}		F5	V_{SS}		G5	PE10RN00		H5	PE10RN01	
E6	PE9RN03		F6	V_{SS}		G6	V_{SS}		H6	V_{SS}	
E7	PE9RN02		F7	V_{SS}		G7	V_{SS}		H7	V_{SS}	
E8	V_{SS}		F8	V_{SS}		G8	V_{SS}		H8	GPIO_20	1
E9	PE9RN01		F9	V_{SS}		G9	V_{SS}		H9	$V_{DD}IO$	
E10	PE9RN00		F10	V_{SS}		G10	V_{SS}		H10	V_{SS}	
E11	V_{SS}		F11	V_{SS}		G11	V_{SS}		H11	V_{SS}	
E12	PE8RN03		F12	V_{SS}		G12	V_{SS}		H12	V_{SS}	
E13	PE8RN02		F13	V_{SS}		G13	V_{SS}		H13	$V_{TT}PE$	
E14	V_{SS}		F14	V_{SS}		G14	V_{SS}		H14	V_{SS}	
E15	PE8RN01		F15	V_{SS}		G15	V_{SS}		H15	$V_{DD}APE$	
E16	PE8RN00		F16	V_{SS}		G16	V_{SS}		H16	V_{SS}	
E17	V_{SS}		F17	V_{SS}		G17	PEREFCLKP1		H17	V_{SS}	
E18	PE3RN03		F18	V_{SS}		G18	PEREFCLKN1		H18	V_{SS}	
E19	PE3RN02		F19	V_{SS}		G19	V_{SS}		H19	V_{SS}	
E20	V_{SS}		F20	V_{SS}		G20	V_{SS}		H20	$V_{DD}APE$	
E21	PE3RN01		F21	V_{SS}		G21	V_{SS}		H21	V_{SS}	
E22	PE3RN00		F22	V_{SS}		G22	V_{SS}		H22	$V_{TT}PE$	
E23	V_{SS}		F23	V_{SS}		G23	V_{SS}		H23	V_{SS}	
E24	PE2RN03		F24	V_{SS}		G24	V_{SS}		H24	V_{SS}	
E25	PE2RN02		F25	V_{SS}		G25	V_{SS}		H25	V_{SS}	
E26	V_{SS}		F26	V_{SS}		G26	V_{SS}		H26	MSMBDAT	
E27	PE2RN01		F27	V_{SS}		G27	MSMBCLK		H27	$V_{DD}IO$	
E28	PE2RN00		F28	V_{SS}		G28	V_{SS}		H28	SSMBCLK	
E29	V_{SS}		F29	V_{SS}		G29	V_{SS}		H29	V_{SS}	
E30	V_{SS}		F30	PE1RN03		G30	PE1RN02		H30	V_{SS}	
E31	V_{SS}		F31	PE1RP03		G31	PE1RP02		H31	V_{SS}	
E32	V_{SS}		F32	V_{SS}		G32	V_{SS}		H32	V_{SS}	
E33	V_{SS}		F33	PE1TN03		G33	PE1TN02		H33	V_{SS}	
E34	V_{SS}		F34	PE1TP03		G34	PE1TP02		H34	V_{SS}	

Table 19 PES64H16 1156-pin Signal Pin-Out (Part 2 of 9)

© 2019 Renesas Electronics Corporation

Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt
J1	V_{SS}		K1	PE10TP02		L1	PE10TP03		M1	V_{SS}	
J2	V_{SS}		K2	PE10TN02		L2	PE10TN03		M2	V_{SS}	
J3	V_{SS}		K3	V_{SS}		L3	V_{SS}		M3	V_{SS}	
J4	V_{SS}		K4	PE10RP02		L4	PE10RP03		M4	V_{SS}	
J5	V_{SS}		K5	PE10RN02		L5	PE10RN03		M5	V_{SS}	
J6	V_{SS}		K6	V_{SS}		L6	V_{SS}		M6	V_{SS}	
J7	V_{SS}		K7	V_{SS}		L7	V_{SS}		M7	V_{SS}	
J8	V_{SS}		K8	V_{SS}		L8	V_{SS}		M8	V_{SS}	
J9	GPIO_25	1	K9	VDDIO		L9	V_{SS}		M9	V_{SS}	
J10	V_{SS}		K10	GPIO_22	1	L10	V_{SS}		M10	V_{SS}	
J11	V_{SS}		K11	V_{SS}		L11	V_{SS}		M11	V_{SS}	
J12	V_{SS}		K12	V_{SS}		L12	V_{SS}		M12	V_{SS}	
J13	V_{SS}		K13	V_{TT}PE		L13	V_{DD}PE		M13	V_{DD}PE	
J14	V_{DD}PE		K14	V_{SS}		L14	V_{DD}PE		M14	V_{SS}	
J15	V_{SS}		K15	V_{DD}APE		L15	V_{DD}PE		M15	V_{DD}PE	
J16	V_{SS}		K16	V_{SS}		L16	V_{SS}		M16	V_{SS}	
J17	V_{TT}PE		K17	V_{TT}PE		L17	V_{DD}PE		M17	V_{DD}PE	
J18	V_{TT}PE		K18	V_{TT}PE		L18	V_{DD}PE		M18	V_{DD}PE	
J19	V_{SS}		K19	V_{SS}		L19	V_{SS}		M19	V_{SS}	
J20	V_{SS}		K20	V_{DD}APE		L20	V_{DD}PE		M20	V_{DD}PE	
J21	V_{DD}PE		K21	V_{SS}		L21	V_{DD}PE		M21	V_{SS}	
J22	V_{SS}		K22	V_{TT}PE		L22	V_{DD}PE		M22	V_{DD}PE	
J23	V_{SS}		K23	V_{SS}		L23	V_{SS}		M23	V_{SS}	
J24	V_{SS}		K24	V_{SS}		L24	V_{SS}		M24	V_{SS}	
J25	JTAG_TDO		K25	CCLKDS		L25	V_{SS}		M25	V_{SS}	
J26	V_{DD}IO		K26	JTAG_TCK		L26	V_{SS}		M26	V_{SS}	
J27	SSMBDAT		K27	V_{SS}		L27	V_{SS}		M27	V_{SS}	
J28	V_{SS}		K28	V_{SS}		L28	V_{SS}		M28	V_{SS}	
J29	V_{SS}		K29	V_{SS}		L29	V_{SS}		M29	V_{SS}	
J30	PE1RN01		K30	PE1RN00		L30	V_{SS}		M30	PE0RN03	
J31	PE1RP01		K31	PE1RP00		L31	V_{SS}		M31	PE0RP03	
J32	V_{SS}		K32	V_{SS}		L32	V_{SS}		M32	V_{SS}	
J33	PE1TN01		K33	PE1TN00		L33	V_{SS}		M33	PE0TN03	
J34	PE1TP01		K34	PE1TP00		L34	V_{SS}		M34	PE0TP03	

Table 19 PES64H16 1156-pin Signal Pin-Out (Part 3 of 9)

© 2019 Renesas Electronics Corporation

Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt
N1	PE11TP00		P1	PE11TP01		R1	V_{SS}		T1	PE11TP02	
N2	PE11TN00		P2	PE11TN01		R2	V_{SS}		T2	PE11TN02	
N3	V_{SS}		P3	V_{SS}		R3	V_{SS}		T3	V_{SS}	
N4	PE11RP00		P4	PE11RP01		R4	V_{SS}		T4	PE11RP02	
N5	PE11RN00		P5	PE11RN01		R5	V_{SS}		T5	PE11RN02	
N6	V_{SS}		P6	V_{SS}		R6	V_{SS}		T6	V_{SS}	
N7	V_{SS}		P7	V_{SS}		R7	V_{SS}		T7	V_{SS}	
N8	V_{TT}PE		P8	V_{SS}		R8	V_{DD}APE		T8	V_{SS}	
N9	V_{SS}		P9	V_{DD}PE		R9	V_{SS}		T9	V_{SS}	
N10	V_{TT}PE		P10	V_{SS}		R10	V_{DD}APE		T10	V_{SS}	
N11	V_{DD}PE		P11	V_{DD}PE		R11	V_{DD}PE		T11	V_{SS}	
N12	V_{DD}PE		P12	V_{SS}		R12	V_{DD}PE		T12	V_{SS}	
N13	V_{DD}CORE		P13	V_{DD}CORE		R13	V_{DD}CORE		T13	V_{SS}	
N14	V_{DD}CORE		P14	V_{SS}		R14	V_{DD}CORE		T14	V_{SS}	
N15	V_{DD}CORE		P15	V_{DD}CORE		R15	V_{SS}		T15	V_{DD}CORE	
N16	V_{SS}		P16	V_{SS}		R16	V_{DD}CORE		T16	V_{SS}	
N17	V_{DD}CORE		P17	V_{DD}CORE		R17	V_{SS}		T17	V_{DD}CORE	
N18	V_{SS}		P18	V_{SS}		R18	V_{DD}CORE		T18	V_{SS}	
N19	V_{DD}CORE		P19	V_{DD}CORE		R19	V_{SS}		T19	V_{DD}CORE	
N20	V_{DD}CORE		P20	V_{SS}		R20	V_{DD}CORE		T20	V_{SS}	
N21	V_{DD}CORE		P21	V_{DD}CORE		R21	V_{SS}		T21	V_{DD}CORE	
N22	V_{DD}CORE		P22	V_{DD}CORE		R22	V_{DD}CORE		T22	V_{DD}CORE	
N23	V_{DD}PE		P23	V_{SS}		R23	V_{DD}PE		T23	V_{SS}	
N24	V_{DD}PE		P24	V_{DD}PE		R24	V_{DD}PE		T24	V_{SS}	
N25	V_{TT}PE		P25	V_{SS}		R25	V_{DD}APE		T25	V_{SS}	
N26	V_{SS}		P26	V_{DD}PE		R26	V_{SS}		T26	V_{SS}	
N27	V_{TT}PE		P27	V_{SS}		R27	V_{DD}APE		T27	V_{SS}	
N28	V_{SS}		P28	V_{SS}		R28	V_{SS}		T28	V_{SS}	
N29	V_{SS}		P29	V_{SS}		R29	V_{SS}		T29	V_{SS}	
N30	PE0RN02		P30	V_{SS}		R30	PE0RN01		T30	PE0RN00	
N31	PE0RP02		P31	V_{SS}		R31	PE0RP01		T31	PE0RP00	
N32	V_{SS}		P32	V_{SS}		R32	V_{SS}		T32	V_{SS}	
N33	PE0TN02		P33	V_{SS}		R33	PE0TN01		T33	PE0TN00	
N34	PE0TP02		P34	V_{SS}		R34	PE0TP01		T34	PE0TP00	

Table 19 PES64H16 1156-pin Signal Pin-Out (Part 4 of 9)

© 2019 Renesas Electronics Corporation

Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt
U1	PE11TP03		V1	V_{SS}		W1	PE4TP00		Y1	PE4TP01	
U2	PE11TN03		V2	V_{SS}		W2	PE4TN00		Y2	PE4TN01	
U3	V_{SS}		V3	V_{SS}		W3	V_{SS}		Y3	V_{SS}	
U4	PE11RP03		V4	V_{SS}		W4	PE4RP00		Y4	PE4RP01	
U5	PE11RN03		V5	V_{SS}		W5	PE4RN00		Y5	PE4RN01	
U6	V_{SS}		V6	V_{SS}		W6	V_{SS}		Y6	V_{SS}	
U7	PEREFCLKN2		V7	PEREFCLKP2		W7	V_{SS}		Y7	V_{SS}	
U8	V_{SS}		V8	V_{SS}		W8	V_{SS}		Y8	V_{DD}APE	
U9	V_{TT}PE		V9	V_{TT}PE		W9	V_{SS}		Y9	V_{SS}	
U10	V_{TT}PE		V10	V_{TT}PE		W10	V_{SS}		Y10	V_{DD}APE	
U11	V_{DD}PE		V11	V_{DD}PE		W11	V_{SS}		Y11	V_{DD}PE	
U12	V_{DD}PE		V12	V_{DD}PE		W12	V_{SS}		Y12	V_{DD}PE	
U13	V_{DD}CORE		V13	V_{SS}		W13	V_{DD}CORE		Y13	V_{DD}CORE	
U14	V_{DD}CORE		V14	V_{SS}		W14	V_{DD}CORE		Y14	V_{SS}	
U15	V_{SS}		V15	V_{DD}CORE		W15	V_{SS}		Y15	V_{DD}CORE	
U16	V_{DD}CORE		V16	V_{SS}		W16	V_{DD}CORE		Y16	V_{SS}	
U17	V_{SS}		V17	V_{DD}CORE		W17	V_{SS}		Y17	V_{DD}CORE	
U18	V_{DD}CORE		V18	V_{SS}		W18	V_{DD}CORE		Y18	V_{SS}	
U19	V_{SS}		V19	V_{DD}CORE		W19	V_{SS}		Y19	V_{DD}CORE	
U20	V_{DD}CORE		V20	V_{SS}		W20	V_{DD}CORE		Y20	V_{SS}	
U21	V_{SS}		V21	V_{DD}CORE		W21	V_{SS}		Y21	V_{DD}CORE	
U22	V_{SS}		V22	V_{DD}CORE		W22	V_{SS}		Y22	V_{DD}CORE	
U23	V_{DD}PE		V23	V_{DD}PE		W23	V_{SS}		Y23	V_{DD}PE	
U24	V_{DD}PE		V24	V_{DD}PE		W24	V_{SS}		Y24	V_{DD}PE	
U25	V_{TT}PE		V25	V_{TT}PE		W25	V_{SS}		Y25	V_{DD}APE	
U26	V_{TT}PE		V26	V_{TT}PE		W26	V_{SS}		Y26	V_{SS}	
U27	V_{SS}		V27	V_{SS}		W27	V_{SS}		Y27	V_{DD}APE	
U28	PEREFCLKP0		V28	PEREFCLKN0		W28	V_{SS}		Y28	V_{SS}	
U29	V_{SS}		V29	V_{SS}		W29	V_{SS}		Y29	V_{SS}	
U30	V_{SS}		V30	PE15RN03		W30	PE15RN02		Y30	V_{SS}	
U31	V_{SS}		V31	PE15RP03		W31	PE15RP02		Y31	V_{SS}	
U32	V_{SS}		V32	V_{SS}		W32	V_{SS}		Y32	V_{SS}	
U33	V_{SS}		V33	PE15TN03		W33	PE15TN02		Y33	V_{SS}	
U34	V_{SS}		V34	PE15TP03		W34	PE15TP02		Y34	V_{SS}	

Table 19 PES64H16 1156-pin Signal Pin-Out (Part 5 of 9)

© 2019 Renesas Electronics Corporation

Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt
AA1	V_{SS}		AB1	PE4TP02		AC1	PE4TP03		AD1	V_{SS}	
AA2	V_{SS}		AB2	PE4TN02		AC2	PE4TN03		AD2	V_{SS}	
AA3	V_{SS}		AB3	V_{SS}		AC3	V_{SS}		AD3	V_{SS}	
AA4	V_{SS}		AB4	PE4RP02		AC4	PE4RP03		AD4	V_{SS}	
AA5	V_{SS}		AB5	PE4RN02		AC5	PE4RN03		AD5	V_{SS}	
AA6	V_{SS}		AB6	V_{SS}		AC6	V_{SS}		AD6	V_{SS}	
AA7	V_{SS}		AB7	V_{SS}		AC7	V_{SS}		AD7	V_{SS}	
AA8	V_{SS}		AB8	V_{TT}PE		AC8	V_{SS}		AD8	V_{SS}	
AA9	V_{DD}PE		AB9	V_{SS}		AC9	V_{SS}		AD9	V_{SS}	
AA10	V_{SS}		AB10	V_{TT}PE		AC10	V_{SS}		AD10	V_{SS}	
AA11	V_{DD}PE		AB11	V_{DD}PE		AC11	V_{SS}		AD11	V_{SS}	
AA12	V_{SS}		AB12	V_{DD}PE		AC12	V_{SS}		AD12	V_{SS}	
AA13	V_{DD}CORE		AB13	V_{DD}CORE		AC13	V_{DD}PE		AD13	V_{DD}PE	
AA14	V_{DD}CORE		AB14	V_{DD}CORE		AC14	V_{SS}		AD14	V_{DD}PE	
AA15	V_{SS}		AB15	V_{DD}CORE		AC15	V_{DD}PE		AD15	V_{DD}PE	
AA16	V_{DD}CORE		AB16	V_{DD}CORE		AC16	V_{SS}		AD16	V_{SS}	
AA17	V_{SS}		AB17	V_{SS}		AC17	V_{DD}PE		AD17	V_{DD}PE	
AA18	V_{DD}CORE		AB18	V_{DD}CORE		AC18	V_{DD}PE		AD18	V_{DD}PE	
AA19	V_{SS}		AB19	V_{SS}		AC19	V_{SS}		AD19	V_{SS}	
AA20	V_{DD}CORE		AB20	V_{DD}CORE		AC20	V_{DD}PE		AD20	V_{DD}PE	
AA21	V_{SS}		AB21	V_{DD}CORE		AC21	V_{SS}		AD21	V_{DD}PE	
AA22	V_{DD}CORE		AB22	V_{DD}CORE		AC22	V_{DD}PE		AD22	V_{DD}PE	
AA23	V_{SS}		AB23	V_{DD}PE		AC23	V_{SS}		AD23	V_{SS}	
AA24	V_{DD}PE		AB24	V_{DD}PE		AC24	V_{SS}		AD24	V_{SS}	
AA25	V_{SS}		AB25	V_{TT}PE		AC25	V_{SS}		AD25	V_{SS}	
AA26	V_{DD}PE		AB26	V_{SS}		AC26	V_{SS}		AD26	V_{SS}	
AA27	V_{SS}		AB27	V_{TT}PE		AC27	V_{SS}		AD27	V_{SS}	
AA28	V_{SS}		AB28	V_{SS}		AC28	V_{SS}		AD28	V_{SS}	
AA29	V_{SS}		AB29	V_{SS}		AC29	V_{SS}		AD29	V_{SS}	
AA30	PE15RN01		AB30	PE15RN00		AC30	V_{SS}		AD30	PE14RN03	
AA31	PE15RP01		AB31	PE15RP00		AC31	V_{SS}		AD31	PE14RP03	
AA32	V_{SS}		AB32	V_{SS}		AC32	V_{SS}		AD32	V_{SS}	
AA33	PE15TN01		AB33	PE15TN00		AC33	V_{SS}		AD33	PE14TN03	
AA34	PE15TP01		AB34	PE15TP00		AC34	V_{SS}		AD34	PE14TP03	

Table 19 PES64H16 1156-pin Signal Pin-Out (Part 6 of 9)

© 2019 Renesas Electronics Corporation

Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt
AE1	PE5TP00		AF1	PE5TP01		AG1	V_{SS}		AH1	PE5TP02	
AE2	PE5TN00		AF2	PE5TN01		AG2	V_{SS}		AH2	PE5TN02	
AE3	V_{SS}		AF3	V_{SS}		AG3	V_{SS}		AH3	V_{SS}	
AE4	PE5RP00		AF4	PE5RP01		AG4	V_{SS}		AH4	PE5RP02	
AE5	PE5RN00		AF5	PE5RN01		AG5	V_{SS}		AH5	PE5RN02	
AE6	V_{SS}		AF6	V_{SS}		AG6	V_{SS}		AH6	V_{SS}	
AE7	V_{SS}		AF7	V_{SS}		AG7	CCLKUS		AH7	V_{SS}	
AE8	V_{SS}		AF8	V_{SS}		AG8	V_{DD}IO		AH8	REFCLKM	
AE9	V_{DD}IO		AF9	V_{DD}IO		AG9	V_{DD}IO		AH9	V_{SS}	
AE10	V_{DD}IO		AF10	V_{DD}IO		AG10	V_{SS}		AH10	V_{SS}	
AE11	V_{SS}		AF11	V_{SS}		AG11	V_{SS}		AH11	V_{SS}	
AE12	V_{SS}		AF12	V_{SS}		AG12	V_{SS}		AH12	V_{SS}	
AE13	V_{TT}PE		AF13	V_{SS}		AG13	V_{TT}PE		AH13	V_{SS}	
AE14	V_{SS}		AF14	V_{DD}PE		AG14	V_{SS}		AH14	V_{SS}	
AE15	V_{DD}APE		AF15	V_{SS}		AG15	V_{DD}APE		AH15	V_{SS}	
AE16	V_{SS}		AF16	V_{SS}		AG16	V_{SS}		AH16	V_{SS}	
AE17	V_{TT}PE		AF17	V_{TT}PE		AG17	V_{SS}		AH17	PEREFCLKN3	
AE18	V_{TT}PE		AF18	V_{TT}PE		AG18	V_{SS}		AH18	PEREFCLKP3	
AE19	V_{SS}		AF19	V_{SS}		AG19	V_{SS}		AH19	V_{SS}	
AE20	V_{DD}APE		AF20	V_{SS}		AG20	V_{DD}APE		AH20	V_{SS}	
AE21	V_{SS}		AF21	V_{DD}PE		AG21	V_{SS}		AH21	V_{SS}	
AE22	V_{TT}PE		AF22	V_{SS}		AG22	V_{TT}PE		AH22	V_{SS}	
AE23	V_{SS}		AF23	V_{SS}		AG23	V_{SS}		AH23	V_{SS}	
AE24	V_{SS}		AF24	V_{SS}		AG24	V_{SS}		AH24	V_{SS}	
AE25	GPIO_06	1	AF25	V_{SS}		AG25	V_{SS}		AH25	V_{SS}	
AE26	V_{DD}IO		AF26	GPIO_09	1	AG26	V_{DD}IO		AH26	V_{SS}	
AE27	V_{SS}		AF27	V_{SS}		AG27	GPIO_04		AH27	V_{SS}	
AE28	V_{SS}		AF28	V_{SS}		AG28	V_{SS}		AH28	V_{SS}	
AE29	V_{SS}		AF29	V_{SS}		AG29	V_{SS}		AH29	V_{SS}	
AE30	PE14RN02		AF30	V_{SS}		AG30	PE14RN01		AH30	PE14RN00	
AE31	PE14RP02		AF31	V_{SS}		AG31	PE14RP01		AH31	PE14RP00	
AE32	V_{SS}		AF32	V_{SS}		AG32	V_{SS}		AH32	V_{SS}	
AE33	PE14TN02		AF33	V_{SS}		AG33	PE14TN01		AH33	PE14TN00	
AE34	PE14TP02		AF34	V_{SS}		AG34	PE14TP01		AH34	PE14TP00	

Table 19 PES64H16 1156-pin Signal Pin-Out (Part 7 of 9)

© 2019 Renesas Electronics Corporation

Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt
AJ1	PE5TP03		AK1	V_{SS}		AL1	$V_{DD}IO$		AM1	P23MERGEN	
AJ2	PE5TN03		AK2	V_{SS}		AL2	P01MERGEN		AM2	P67MERGEN	
AJ3	V_{SS}		AK3	V_{SS}		AL3	P45MERGEN		AM3	P1415MERGEN	
AJ4	PE5RP03		AK4	V_{SS}		AL4	$V_{DD}IO$		AM4	P1011MERGEN	
AJ5	PE5RN03		AK5	V_{SS}		AL5	P89MERGEN		AM5	SWMODE_3	
AJ6	V_{SS}		AK6	V_{SS}		AL6	V_{SS}		AM6	V_{SS}	
AJ7	V_{SS}		AK7	PE6RN00		AL7	PE6RP00		AM7	V_{SS}	
AJ8	V_{SS}		AK8	PE6RN01		AL8	PE6RP01		AM8	V_{SS}	
AJ9	V_{SS}		AK9	V_{SS}		AL9	V_{SS}		AM9	V_{SS}	
AJ10	V_{SS}		AK10	PE6RN02		AL10	PE6RP02		AM10	V_{SS}	
AJ11	V_{SS}		AK11	PE6RN03		AL11	PE6RP03		AM11	V_{SS}	
AJ12	V_{SS}		AK12	V_{SS}		AL12	V_{SS}		AM12	V_{SS}	
AJ13	V_{SS}		AK13	PE7RN00		AL13	PE7RP00		AM13	V_{SS}	
AJ14	V_{SS}		AK14	PE7RN01		AL14	PE7RP01		AM14	V_{SS}	
AJ15	V_{SS}		AK15	V_{SS}		AL15	V_{SS}		AM15	V_{SS}	
AJ16	V_{SS}		AK16	PE7RN02		AL16	PE7RP02		AM16	V_{SS}	
AJ17	V_{SS}		AK17	PE7RN03		AL17	PE7RP03		AM17	V_{SS}	
AJ18	V_{SS}		AK18	V_{SS}		AL18	V_{SS}		AM18	V_{SS}	
AJ19	V_{SS}		AK19	PE12RN00		AL19	PE12RP00		AM19	V_{SS}	
AJ20	V_{SS}		AK20	PE12RN01		AL20	PE12RP01		AM20	V_{SS}	
AJ21	V_{SS}		AK21	V_{SS}		AL21	V_{SS}		AM21	V_{SS}	
AJ22	V_{SS}		AK22	PE12RN02		AL22	PE12RP02		AM22	V_{SS}	
AJ23	V_{SS}		AK23	PE12RN03		AL23	PE12RP03		AM23	V_{SS}	
AJ24	V_{SS}		AK24	V_{SS}		AL24	V_{SS}		AM24	V_{SS}	
AJ25	V_{SS}		AK25	PE13RN00		AL25	PE13RP00		AM25	V_{SS}	
AJ26	V_{SS}		AK26	PE13RN01		AL26	PE13RP01		AM26	V_{SS}	
AJ27	V_{SS}		AK27	V_{SS}		AL27	V_{SS}		AM27	V_{SS}	
AJ28	V_{SS}		AK28	PE13RN02		AL28	PE13RP02		AM28	V_{SS}	
AJ29	V_{SS}		AK29	PE13RN03		AL29	PE13RP03		AM29	V_{SS}	
AJ30	V_{SS}		AK30	V_{SS}		AL30	V_{SS}		AM30	V_{SS}	
AJ31	V_{SS}		AK31	GPIO_08	1	AL31	GPIO_07	1	AM31	GPIO_00	
AJ32	V_{SS}		AK32	GPIO_15	1	AL32	$V_{DD}IO$		AM32	GPIO_05	1
AJ33	V_{SS}		AK33	GPIO_14	1	AL33	GPIO_10	1	AM33	GPIO_11	1
AJ34	V_{SS}		AK34	$V_{DD}IO$		AL34	GPIO_12	1	AM34	GPIO_13	1

Table 19 PES64H16 1156-pin Signal Pin-Out (Part 8 of 9)

© 2019 Renesas Electronics Corporation

Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt	Pin	Function	Alt
AN1	V_{SS}		AN18	V_{SS}		AP1	V_{SS}		AP18	V_{SS}	
AN2	$V_{DD}IO$		AN19	PE12TN00		AP2	V_{SS}		AP19	PE12TP00	
AN3	P1213MERGEN		AN20	PE12TN01		AP3	RSTHALT		AP20	PE12TP01	
AN4	SWMODE_0		AN21	V_{SS}		AP4	SWMODE_1		AP21	V_{SS}	
AN5	SWMODE_2		AN22	PE12TN02		AP5	$V_{DD}IO$		AP22	PE12TP02	
AN6	V_{SS}		AN23	PE12TN03		AP6	V_{SS}		AP23	PE12TP03	
AN7	PE6TN00		AN24	V_{SS}		AP7	PE6TP00		AP24	V_{SS}	
AN8	PE6TN01		AN25	PE13TN00		AP8	PE6TP01		AP25	PE13TP00	
AN9	V_{SS}		AN26	PE13TN01		AP9	V_{SS}		AP26	PE13TP01	
AN10	PE6TN02		AN27	V_{SS}		AP10	PE6TP02		AP27	V_{SS}	
AN11	PE6TN03		AN28	PE13TN02		AP11	PE6TP03		AP28	PE13TP02	
AN12	V_{SS}		AN29	PE13TN03		AP12	V_{SS}		AP29	PE13TP03	
AN13	PE7TN00		AN30	V_{SS}		AP13	PE7TP00		AP30	V_{SS}	
AN14	PE7TN01		AN31	GPIO_01		AP14	PE7TP01		AP31	$V_{DD}IO$	
AN15	V_{SS}		AN32	GPIO_02		AP15	V_{SS}		AP32	GPIO_03	
AN16	PE7TN02		AN33	$V_{DD}IO$		AP16	PE7TP02		AP33	V_{SS}	
AN17	PE7TN03		AN34	V_{SS}		AP17	PE7TP03		AP34	V_{SS}	

Table 19 PES64H16 1156-pin Signal Pin-Out (Part 9 of 9)

Alternate Signal Functions

Pin	GPIO	Alternate	Pin	GPIO	Alternate
AM32	GPIO_05	GPEN	B3	GPIO_18	P13RSTN
AE25	GPIO_06	P1RSTN	A3	GPIO_19	P14RSTN
AL31	GPIO_07	P2RSTN	H8	GPIO_20	P15RSTN
AK31	GPIO_08	P3RSTN	C3	GPIO_21	IOEXPINTN0
AF26	GPIO_09	P4RSTN	K10	GPIO_22	IOEXPINTN1
AL33	GPIO_10	P5RSTN	D4	GPIO_23	IOEXPINTN2
AM33	GPIO_11	P6RSTN	E4	GPIO_24	IOEXPINTN3
AL34	GPIO_12	P7RSTN	J9	GPIO_25	IOEXPINTN4
AM34	GPIO_13	P8RSTN	D2	GPIO_26	IOEXPINTN5
AK33	GPIO_14	P9RSTN	C2	GPIO_27	IOEXPINTN6
AK32	GPIO_15	P10RSTN	D1	GPIO_28	IOEXPINTN7
C4	GPIO_16	P11RSTN	E3	GPIO_31	IOEXPINTN10
B4	GPIO_17	P12RSTN	—	—	—

Table 20 PES64H16 Alternate Signal Functions

© 2019 Renesas Electronics Corporation

Power Pins

V_{DD}Core	V_{DD}Core	V_{DD}IO	V_{DD}PE	V_{DD}PE	V_{DD}APE	V_{TT}PE
N13	V19	A4	J14	V11	H15	H13
N14	V21	A30	J21	V12	H20	H22
N15	V22	B2	L13	V23	K15	J17
N17	W13	B33	L14	V24	K20	J18
N19	W14	D3	L15	Y11	R8	K13
N20	W16	D31	L17	Y12	R10	K17
N21	W18	D34	L18	Y23	R25	K18
N22	W20	E1	L20	Y24	R27	K22
P13	Y13	H9	L21	AA9	Y8	N8
P15	Y15	H27	L22	AA11	Y10	N10
P17	Y17	J26	M13	AA24	Y25	N25
P19	Y19	K9	M15	AA26	Y27	N27
P21	Y21	AE9	M17	AB11	AE15	U9
P22	Y22	AE10	M18	AB12	AE20	U10
R13	AA13	AE26	M20	AB23	AG15	U25
R14	AA14	AF9	M22	AB24	AG20	U26
R16	AA16	AF10	N11	AC13		V9
R18	AA18	AG8	N12	AC15		V10
R20	AA20	AG9	N23	AC17		V25
R22	AA22	AG26	N24	AC18		V26
T15	AB13	AK34	P9	AC20		AB8
T17	AB14	AL1	P11	AC22		AB10
T19	AB15	AL4	P24	AD13		AB25
T21	AB16	AL32	P26	AD14		AB27
T22	AB18	AN2	R11	AD15		AE13
U13	AB20	AN33	R12	AD17		AE17
U14	AB21	AP5	R23	AD18		AE18
U16	AB22	AP31	R24	AD20		AE22
U18			U11	AD21		AF17
U20			U12	AD22		AF18
V15			U23	AF14		AG13
V17			U24	AF21		AG22

Table 21 PES64H16 Power Pins

© 2019 Renesas Electronics Corporation

Ground Pins

V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}
A1	C16	E33	G8	H29	K16	M5	P12
A2	C17	E34	G9	H30	K19	M6	P14
A5	C18	F1	G10	H31	K21	M7	P16
A8	C19	F2	G11	H32	K23	M8	P18
A11	C20	F3	G12	H33	K24	M9	P20
A14	C21	F4	G13	H34	K27	M10	P23
A17	C22	F5	G14	J1	K28	M11	P25
A20	C23	F6	G15	J2	K29	M12	P27
A23	C24	F7	G16	J3	K32	M14	P28
A26	C25	F8	G19	J4	L3	M16	P29
A29	C26	F9	G20	J5	L6	M19	P30
A33	C27	F10	G21	J6	L7	M21	P31
A34	C28	F11	G22	J7	L8	M23	P32
B1	C29	F12	G23	J8	L9	M24	P33
B5	D5	F13	G24	J10	L10	M25	P34
B8	D8	F14	G25	J11	L11	M26	R1
B11	D11	F15	G26	J12	L12	M27	R2
B14	D14	F16	G28	J13	L16	M28	R3
B17	D17	F17	G29	J15	L19	M29	R4
B20	D20	F18	G32	J16	L23	M32	R5
B23	D23	F19	H3	J19	L24	N3	R6
B26	D26	F20	H6	J20	L25	N6	R7
B29	D29	F21	H7	J22	L26	N7	R9
B34	E5	F22	H10	J23	L27	N9	R15
C5	E8	F23	H11	J24	L28	N16	R17
C6	E11	F24	H12	J28	L29	N18	R19
C7	E14	F25	H14	J29	L30	N26	R21
C8	E17	F26	H16	J32	L31	N28	R26
C9	E20	F27	H17	K3	L32	N29	R28
C10	E23	F28	H18	K6	L33	N32	R29
C11	E26	F29	H19	K7	L34	P3	R32
C12	E29	F32	H21	K8	M1	P6	T3
C13	E30	G3	H23	K11	M2	P7	T6
C14	E31	G6	H24	K12	M3	P8	T7
C15	E32	G7	H25	K14	M4	P10	T8

Table 22 PES64H16 Ground Pins (Part 1 of 3)

© 2019 Renesas Electronics Corporation

V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}
T9	V6	Y18	AB28	AD11	AF19	AH7	AJ21
T10	V8	Y20	AB29	AD12	AF20	AH9	AJ22
T11	V13	Y26	AB32	AD16	AF22	AH10	AJ23
T12	V14	Y28	AC3	AD19	AF23	AH11	AJ24
T13	V16	Y29	AC6	AD23	AF24	AH12	AJ25
T14	V18	Y30	AC7	AD24	AF25	AH13	AJ26
T16	V20	Y31	AC8	AD25	AF27	AH14	AJ27
T18	V27	Y32	AC9	AD26	AF28	AH15	AJ28
T20	V29	Y33	AC10	AD27	AF29	AH16	AJ29
T23	V32	Y34	AC11	AD28	AF30	AH19	AJ30
T24	W3	AA1	AC12	AD29	AF31	AH20	AJ31
T25	W6	AA2	AC14	AD32	AF32	AH21	AJ32
T26	W7	AA3	AC16	AE3	AF33	AH22	AJ33
T27	W8	AA4	AC19	AE6	AF34	AH23	AJ34
T28	W9	AA5	AC21	AE7	AG1	AH24	AK1
T29	W10	AA6	AC23	AE8	AG2	AH25	AK2
T32	W11	AA7	AC24	AE11	AG3	AH26	AK3
U3	W12	AA8	AC25	AE12	AG4	AH27	AK4
U6	W15	AA10	AC26	AE14	AG5	AH28	AK5
U8	W17	AA12	AC27	AE16	AG6	AH29	AK6
U15	W19	AA15	AC28	AE19	AG10	AH32	AK9
U17	W21	AA17	AC29	AE21	AG11	AJ3	AK12
U19	W22	AA19	AC30	AE23	AG12	AJ6	AK15
U21	W23	AA21	AC31	AE24	AG14	AJ7	AK18
U22	W24	AA23	AC32	AE27	AG16	AJ8	AK21
U27	W25	AA25	AC33	AE28	AG17	AJ9	AK24
U29	W26	AA27	AC34	AE29	AG18	AJ10	AK27
U30	W27	AA28	AD1	AE32	AG19	AJ11	AK30
U31	W28	AA29	AD2	AF3	AG21	AJ12	AL6
U32	W29	AA32	AD3	AF6	AG23	AJ13	AL9
U33	W32	AB3	AD4	AF7	AG24	AJ14	AL12
U34	Y3	AB6	AD5	AF8	AG25	AJ15	AL15
V1	Y6	AB7	AD6	AF11	AG28	AJ16	AL18
V2	Y7	AB9	AD7	AF12	AG29	AJ17	AL21
V3	Y9	AB17	AD8	AF13	AG32	AJ18	AL24
V4	Y14	AB19	AD9	AF15	AH3	AJ19	AL27
V5	Y16	AB26	AD10	AF16	AH6	AJ20	AL30

Table 22 PES64H16 Ground Pins (Part 2 of 3)

© 2019 Renesas Electronics Corporation

V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}
AM6	AM13	AM20	AM27	AN12	AN34	AP18	
AM7	AM14	AM21	AM28	AN15	AP1	AP21	
AM8	AM15	AM22	AM29	AN18	AP2	AP24	
AM9	AM16	AM23	AM30	AN21	AP6	AP27	
AM10	AM17	AM24	AN1	AN24	AP9	AP30	
AM11	AM18	AM25	AN6	AN27	AP12	AP33	
AM12	AM19	AM26	AN9	AN30	AP15	AP34	

Table 22 PES64H16 Ground Pins (Part 3 of 3)

Signals Listed Alphabetically

Signal Name	I/O Type	Location	Signal Category
CCLKDS	I	K25	System
CCLKUS	I	AG7	
GPIO_00	I/O	AM31	General Purpose I/O
GPIO_01	I/O	AN31	
GPIO_02	I/O	AN32	
GPIO_03	I/O	AP32	
GPIO_04	I/O	AG27	
GPIO_05	I/O	AM32	
GPIO_06	I/O	AE25	
GPIO_07	I/O	AL31	
GPIO_08	I/O	AK31	
GPIO_09	I/O	AF26	
GPIO_10	I/O	AL33	
GPIO_11	I/O	AM33	
GPIO_12	I/O	AL34	
GPIO_13	I/O	AM34	
GPIO_14	I/O	AK33	
GPIO_15	I/O	AK32	
GPIO_16	I/O	C4	
GPIO_17	I/O	B4	
GPIO_18	I/O	B3	
GPIO_19	I/O	A3	
GPIO_20	I/O	H8	

Table 23 89PES64H16 Alphabetical Signal List (Part 1 of 10)

© 2019 Renesas Electronics Corporation

Signal Name	I/O Type	Location	Signal Category
GPIO_21	I/O	C3	General Purpose I/O (cont.)
GPIO_22	I/O	K10	
GPIO_23	I/O	D4	
GPIO_24	I/O	E4	
GPIO_25	I/O	J9	
GPIO_26	I/O	D2	
GPIO_27	I/O	C2	
GPIO_28	I/O	D1	
GPIO_29	I/O	C1	
GPIO_30	I/O	E2	
GPIO_31	I/O	E3	
JTAG_TCK	I	K26	Test
JTAG_TDI	I	C31	
JTAG_TDO	O	J25	
JTAG_TMS	I	D30	
JTAG_TRST_N	I	C32	
MSMBADDR_1	I	A31	SMBus Interface
MSMBADDR_2	I	B31	
MSMBADDR_3	I	B30	
MSMBADDR_4	I	C30	
MSMBCLK	I/O	G27	
MSMBDAT	I/O	H26	
MSMBSMODE	I	A32	System
P01MERGEN	I	AL2	
P23MERGEN	I	AM1	
P45MERGEN	I	AL3	
P67MERGEN	I	AM2	
P89MERGEN	I	AL5	
P1011MERGEN	I	AM4	
P1213MERGEN	I	AN3	
P1415MERGEN	I	AM3	
PE0RN00	I	T30	PCI Express
PE0RN01	I	R30	
PE0RN02	I	N30	
PE0RN03	I	M30	
PE0RP00	I	T31	

Table 23 89PES64H16 Alphabetical Signal List (Part 2 of 10)

© 2019 Renesas Electronics Corporation

Signal Name	I/O Type	Location	Signal Category
PE0RP01	I	R31	PCI Express (cont.)
PE0RP02	I	N31	
PE0RP03	I	M31	
PE0TN00	O	T33	
PE0TN01	O	R33	
PE0TN02	O	N33	
PE0TN03	O	M33	
PE0TP00	O	T34	
PE0TP01	O	R34	
PE0TP02	O	N34	
PE0TP03	O	M34	
PE1RN00	I	K30	
PE1RN01	I	J30	
PE1RN02	I	G30	
PE1RN03	I	F30	
PE1RP00	I	K31	
PE1RP01	I	J31	
PE1RP02	I	G31	
PE1RP03	I	F31	
PE1TN00	O	K33	
PE1TN01	O	J33	
PE1TN02	O	G33	
PE1TN03	O	F33	
PE1TP00	O	K34	
PE1TP01	O	J34	
PE1TP02	O	G34	
PE1TP03	O	F34	
PE2RN00	I	E28	
PE2RN01	I	E27	
PE2RN02	I	E25	
PE2RN03	I	E24	
PE2RP00	I	D28	
PE2RP01	I	D27	
PE2RP02	I	D25	
PE2RP03	I	D24	
PE2TN00	O	B28	

Table 23 89PES64H16 Alphabetical Signal List (Part 3 of 10)

© 2019 Renesas Electronics Corporation

Signal Name	I/O Type	Location	Signal Category
PE2TN01	O	B27	PCI Express (cont.)
PE2TN02	O	B25	
PE2TN03	O	B24	
PE2TP00	O	A28	
PE2TP01	O	A27	
PE2TP02	O	A25	
PE2TP03	O	A24	
PE3RN00	I	E22	
PE3RN01	I	E21	
PE3RN02	I	E19	
PE3RN03	I	E18	
PE3RP00	I	D22	
PE3RP01	I	D21	
PE3RP02	I	D19	
PE3RP03	I	D18	
PE3TN00	O	B22	
PE3TN01	O	B21	
PE3TN02	O	B19	
PE3TN03	O	B18	
PE3TP00	O	A22	
PE3TP01	O	A21	
PE3TP02	O	A19	
PE3TP03	O	A18	
PE4RN00	I	W5	
PE4RN01	I	Y5	
PE4RN02	I	AB5	
PE4RN03	I	AC5	
PE4RP00	I	W4	
PE4RP01	I	Y4	
PE4RP02	I	AB4	
PE4RP03	I	AC4	
PE4TN00	O	W2	
PE4TN01	O	Y2	
PE4TN02	O	AB2	
PE4TN03	O	AC2	
PE4TP00	O	W1	

Table 23 89PES64H16 Alphabetical Signal List (Part 4 of 10)

© 2019 Renesas Electronics Corporation

Signal Name	I/O Type	Location	Signal Category
PE4TP01	O	Y1	PCI Express (cont.)
PE4TP02	O	AB1	
PE4TP03	O	AC1	
PE5RN00	I	AE5	
PE5RN01	I	AF5	
PE5RN02	I	AH5	
PE5RN03	I	AJ5	
PE5RP00	I	AE4	
PE5RP01	I	AF4	
PE5RP02	I	AH4	
PE5RP03	I	AJ4	
PE5TN00	O	AE2	
PE5TN01	O	AF2	
PE5TN02	O	AH2	
PE5TN03	O	AJ2	
PE5TP00	O	AE1	
PE5TP01	O	AF1	
PE5TP02	O	AH1	
PE5TP03	O	AJ1	
PE6RN00	I	AK7	
PE6RN01	I	AK8	
PE6RN02	I	AK10	
PE6RN03	I	AK11	
PE6RP00	I	AL7	
PE6RP01	I	AL8	
PE6RP02	I	AL10	
PE6RP03	I	AL11	
PE6TN00	O	AN7	
PE6TN01	O	AN8	
PE6TN02	O	AN10	
PE6TN03	O	AN11	
PE6TP00	O	AP7	
PE6TP01	O	AP8	
PE6TP02	O	AP10	
PE6TP03	O	AP11	
PE7RN00	I	AK13	

Table 23 89PES64H16 Alphabetical Signal List (Part 5 of 10)

© 2019 Renesas Electronics Corporation

Signal Name	I/O Type	Location	Signal Category
PE7RN01	I	AK14	PCI Express (cont.)
PE7RN02	I	AK16	
PE7RN03	I	AK17	
PE7RP00	I	AL13	
PE7RP01	I	AL14	
PE7RP02	I	AL16	
PE7RP03	I	AL17	
PE7TN00	O	AN13	
PE7TN01	O	AN14	
PE7TN02	O	AN16	
PE7TN03	O	AN17	
PE7TP00	O	AP13	
PE7TP01	O	AP14	
PE7TP02	O	AP16	
PE7TP03	O	AP17	
PE8RN00	I	E16	
PE8RN01	I	E15	
PE8RN02	I	E13	
PE8RN03	I	E12	
PE8RP00	I	D16	
PE8RP01	I	D15	
PE8RP02	I	D13	
PE8RP03	I	D12	
PE8TN00	O	B16	
PE8TN01	O	B15	
PE8TN02	O	B13	
PE8TN03	O	B12	
PE8TP00	O	A16	
PE8TP01	O	A15	
PE8TP02	O	A13	
PE8TP03	O	A12	
PE9RN00	I	E10	
PE9RN01	I	E9	
PE9RN02	I	E7	
PE9RN03	I	E6	
PE9RP00	I	D10	

Table 23 89PES64H16 Alphabetical Signal List (Part 6 of 10)

© 2019 Renesas Electronics Corporation

Signal Name	I/O Type	Location	Signal Category
PE9RP01	I	D9	PCI Express (cont.)
PE9RP02	I	D7	
PE9RP03	I	D6	
PE9TN00	O	B10	
PE9TN01	O	B9	
PE9TN02	O	B7	
PE9TN03	O	B6	
PE9TP00	O	A10	
PE9TP01	O	A9	
PE9TP02	O	A7	
PE9TP03	O	A6	
PE10RN00	I	G5	
PE10RN01	I	H5	
PE10RN02	I	K5	
PE10RN03	I	L5	
PE10RP00	I	G4	
PE10RP01	I	H4	
PE10RP02	I	K4	
PE10RP03	I	L4	
PE10TN00	O	G2	
PE10TN01	O	H2	
PE10TN02	O	K2	
PE10TN03	O	L2	
PE10TP00	O	G1	
PE10TP01	O	H1	
PE10TP02	O	K1	
PE10TP03	O	L1	
PE11RN00	I	N5	
PE11RN01	I	P5	
PE11RN02	I	T5	
PE11RN03	I	U5	
PE11RP00	I	N4	
PE11RP01	I	P4	
PE11RP02	I	T4	
PE11RP03	I	U4	
PE11TN00	O	N2	

Table 23 89PES64H16 Alphabetical Signal List (Part 7 of 10)

© 2019 Renesas Electronics Corporation

Signal Name	I/O Type	Location	Signal Category
PE11TN01	O	P2	PCI Express (cont.)
PE11TN02	O	T2	
PE11TN03	O	U2	
PE11TP00	O	N1	
PE11TP01	O	P1	
PE11TP02	O	T1	
PE11TP03	O	U1	
PE12RN00	I	AK19	
PE12RN01	I	AK20	
PE12RN02	I	AK22	
PE12RN03	I	AK23	
PE12RP00	I	AL19	
PE12RP01	I	AL20	
PE12RP02	I	AL22	
PE12RP03	I	AL23	
PE12TN00	O	AN19	
PE12TN01	O	AN20	
PE12TN02	O	AN22	
PE12TN03	O	AN23	
PE12TP00	O	AP19	
PE12TP01	O	AP20	
PE12TP02	O	AP22	
PE12TP03	O	AP23	
PE13RN00	I	AK25	
PE13RN01	I	AK26	
PE13RN02	I	AK28	
PE13RN03	I	AK29	
PE13RP00	I	AL25	
PE13RP01	I	AL26	
PE13RP02	I	AL28	
PE13RP03	I	AL29	
PE13TN00	O	AN25	
PE13TN01	O	AN26	
PE13TN02	O	AN28	
PE13TN03	O	AN29	
PE13TP00	O	AP25	

Table 23 89PES64H16 Alphabetical Signal List (Part 8 of 10)

© 2019 Renesas Electronics Corporation

Signal Name	I/O Type	Location	Signal Category
PE13TP01	O	AP26	PCI Express (cont.)
PE13TP02	O	AP28	
PE13TP03	O	AP29	
PE14RN00	I	AH30	
PE14RN01	I	AG30	
PE14RN02	I	AE30	
PE14RN03	I	AD30	
PE14RP00	I	AH31	
PE14RP01	I	AG31	
PE14RP02	I	AE31	
PE14RP03	I	AD31	
PE14TN00	O	AH33	
PE14TN01	O	AG33	
PE14TN02	O	AE33	
PE14TN03	O	AD33	
PE14TP00	O	AH34	
PE14TP01	O	AG34	
PE14TP02	O	AE34	
PE14TP03	O	AD34	
PE15RN00	I	AB30	
PE15RN01	I	AA30	
PE15RN02	I	W30	
PE15RN03	I	V30	
PE15RP00	I	AB31	
PE15RP01	I	AA31	
PE15RP02	I	W31	
PE15RP03	I	V31	
PE15TN00	O	AB33	
PE15TN01	O	AA33	
PE15TN02	O	W33	
PE15TN03	O	V33	
PE15TP00	O	AB34	
PE15TP01	O	AA34	
PE15TP02	O	W34	
PE15TP03	O	V34	

Table 23 89PES64H16 Alphabetical Signal List (Part 9 of 10)


© 2019 Renesas Electronics Corporation

Signal Name	I/O Type	Location	Signal Category
PEREFCLKN0	I	V28	PCI Express (cont.)
PEREFCLKN1	I	G18	
PEREFCLKN2	I	U7	
PEREFCLKN3	I	AH17	
PEREFCLKP0	I	U28	
PEREFCLKP1	I	G17	
PEREFCLKP2	I	V7	
PEREFCLKP3	I	AH18	
PERSTN	I	B32	System
REFCLKM	I	AH8	PCI Express
RSTHALT	I	AP3	System
SSMBADDR_1	I	C34	SMBus Interface
SSMBADDR_2	I	C33	
SSMBADDR_3	I	D33	
SSMBADDR_5	I	D32	
SSMBCLK	I/0	H28	
SSMBDAT	I/O	J27	
SWMODE_0	I	AN4	System
SWMODE_1	I	AP4	
SWMODE_2	I	AN5	
SWMODE_3	I	AM5	
V_{DD}CORE, V_{DD}APE, V_{DD}IO, V_{DD}PE, V_{TT}PE	See Table 21 for a listing of power pins.		
V_{SS}	See Table 22 for a listing of ground pins.		

Table 23 89PES64H16 Alphabetical Signal List (Part 10 of 10)


© 2019 Renesas Electronics Corporation

PES64H16 Pinout — Top View

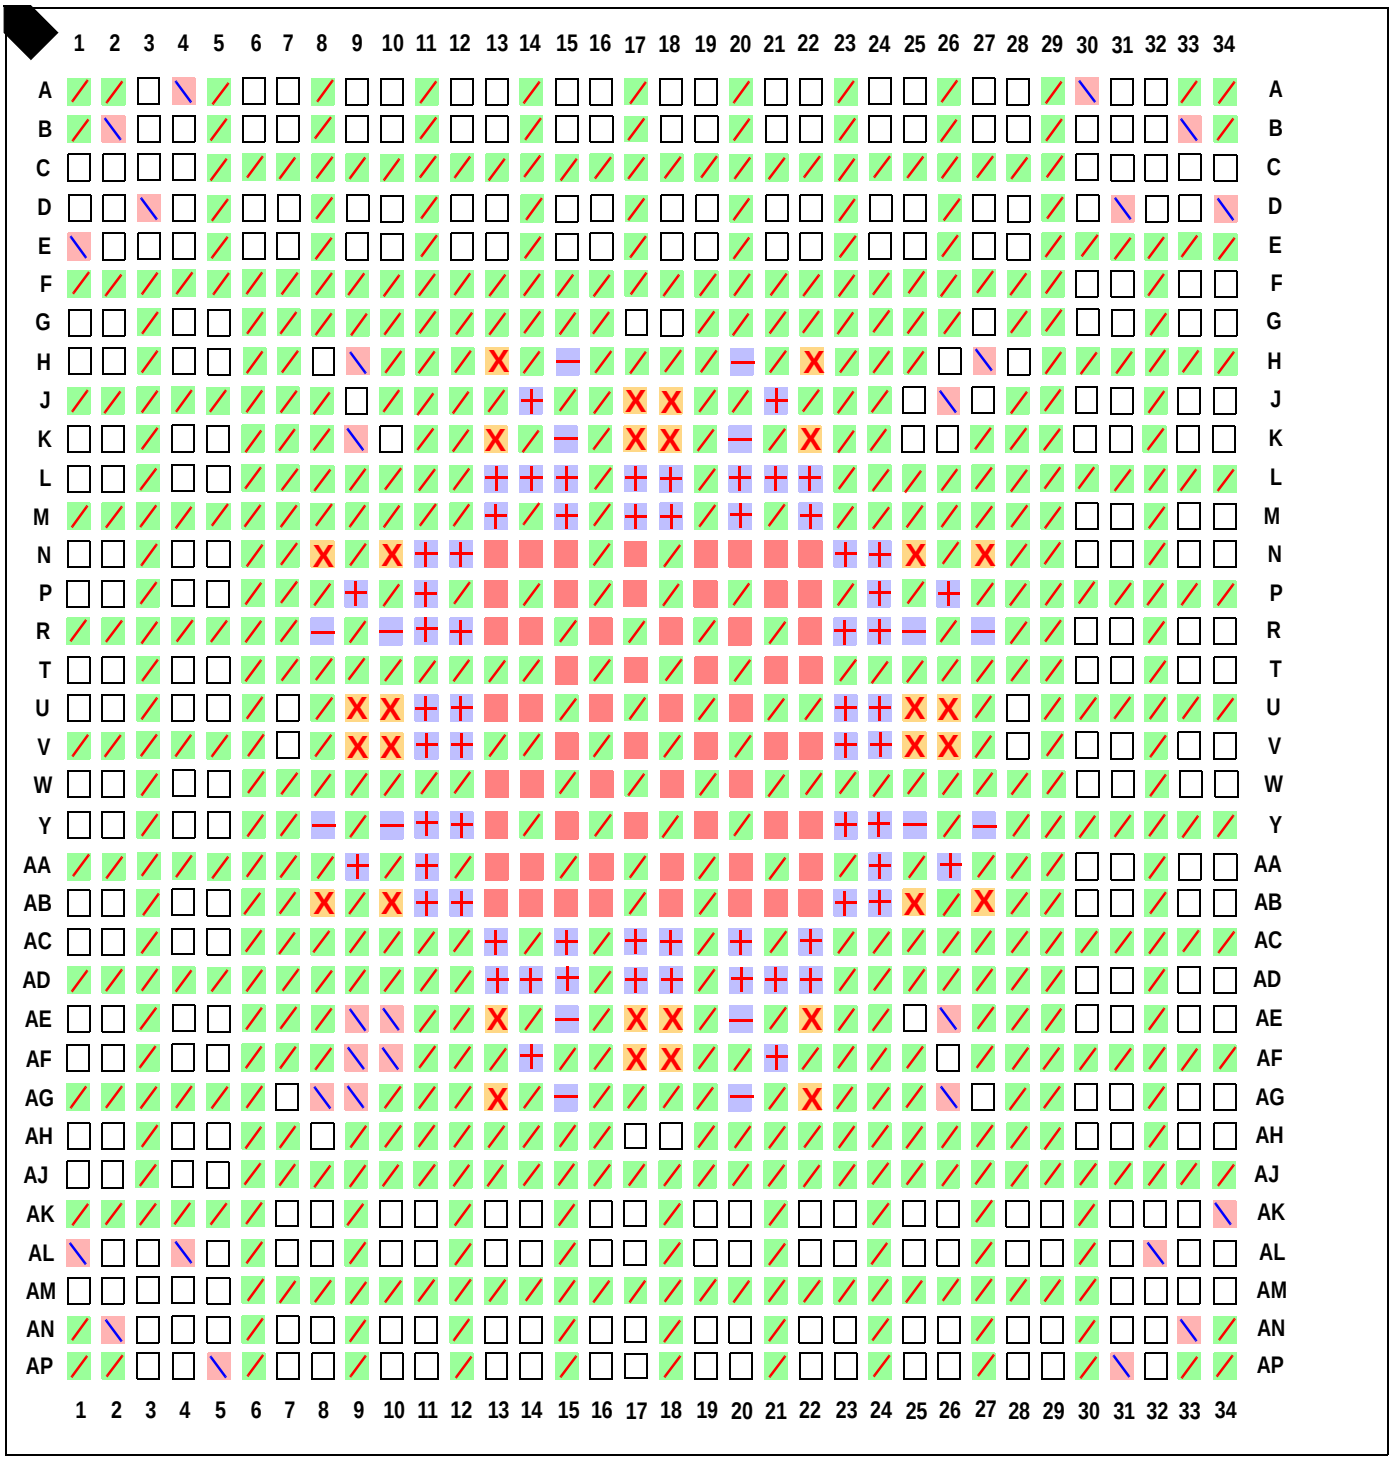


© 2019 Renesas Electronics Corporation

PES64H16 Package Drawing — 1156-Pin BL1156/BR1156

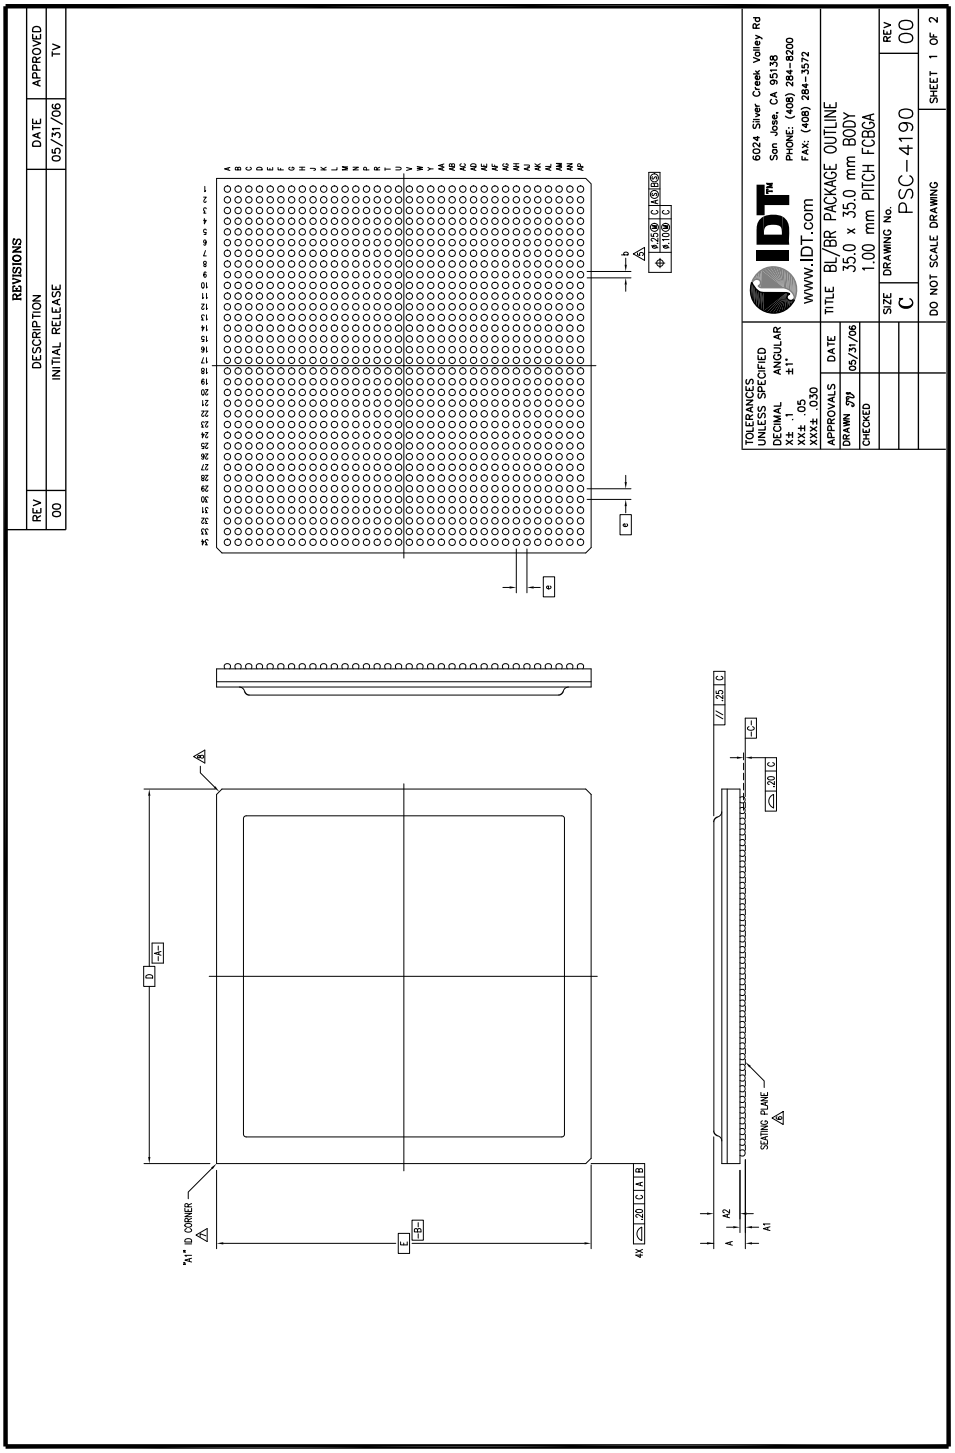

© 2019 Renesas Electronics Corporation

PES64H16 Package Drawing — Page Two

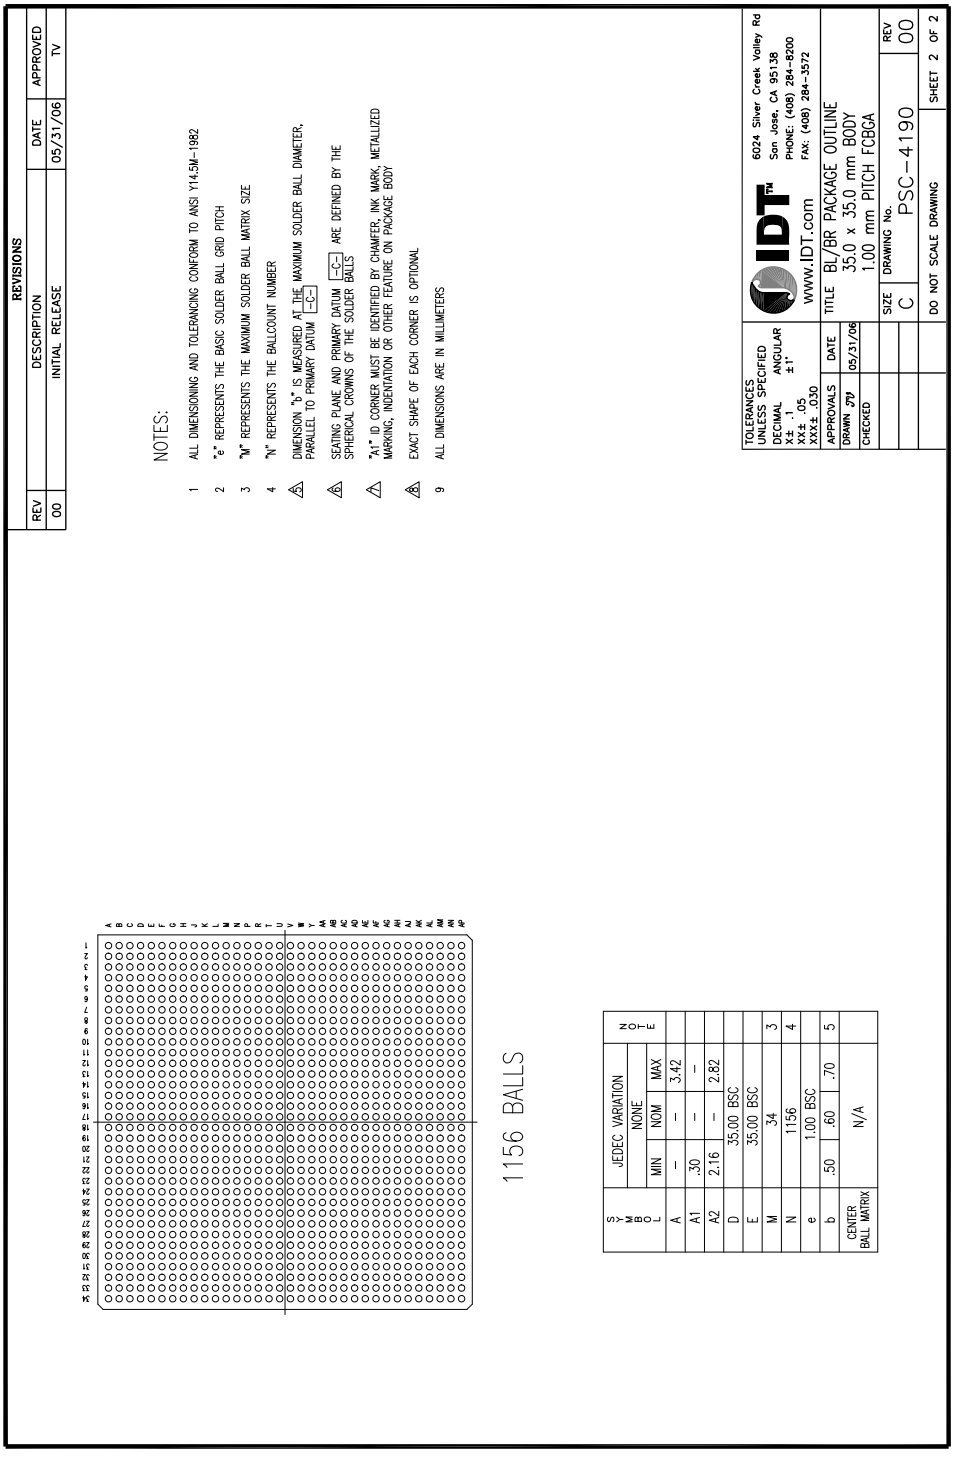

© 2019 Renesas Electronics Corporation

Revision History

July 19, 2007: Initial publication of data sheet.

November 14, 2007: Added new parameter, Termination Resistor, to Table 9, Input Clock Requirements.


April 16, 2008: In Table 17, Thermal Specifications, revised values for θ_{JA}, θ_{JB}, and θ_{JC}.

October 7, 2008: In Table 5, revised description of PxxMERGEN pins.

September 28, 2011: Added new Table 14, PES64H16 Absolute Maximum Voltage Rating.

© 2019 Renesas Electronics Corporation

Ordering Information

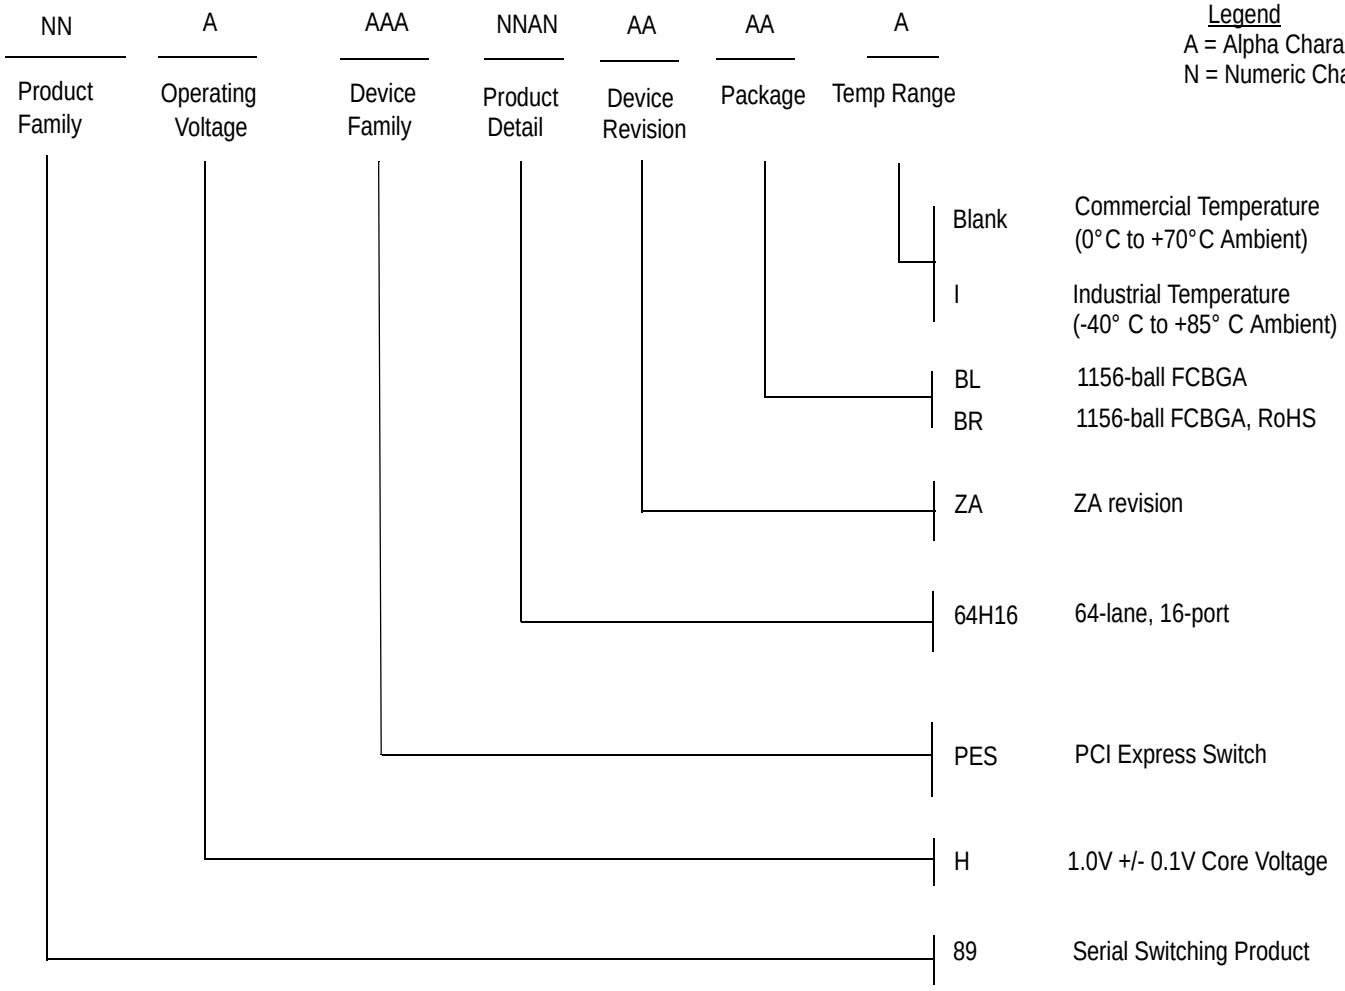

Valid Combinations

89HPES64H16ZABL	1156-ball FCBGA package, Commercial Temperature
89HPES64H16ZABR	1156-ball RoHS FCBGA package, Commercial Temperature
89HPES64H16ZABLI	1156-ball FCBGA package, Industrial Temperature
89HPES64H16ZABRI	1156-ball RoHS FCBGA package, Industrial Temperature

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

© 2020 Renesas Electronics Corporation. All rights reserved.