



光谱图

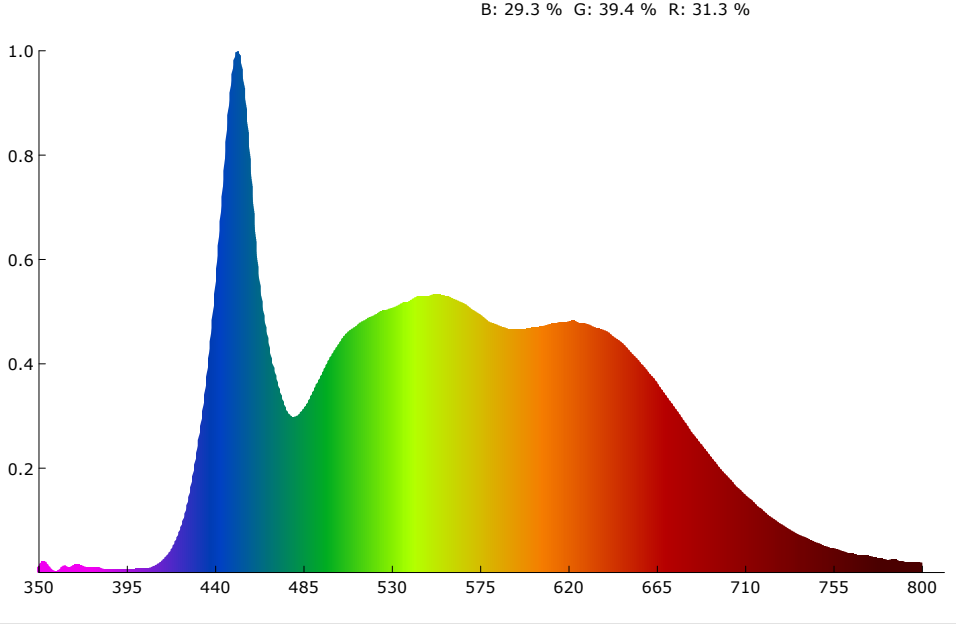

SDCM

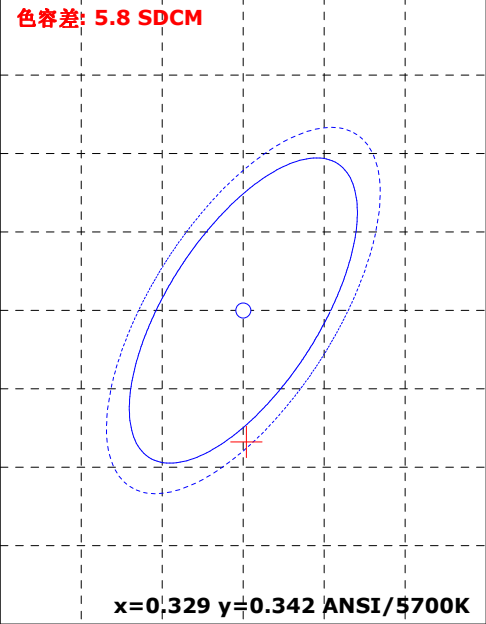

颜色参数:

坐标x: 0.3289 坐标y: 0.3333 坐标u: 0.2074 坐标v: 0.3153 坐标u': 0.2074 坐标v': 0.4729
红色比: 31.3 % 绿色比: 39.4 % 蓝色比: 29.3 % 光通量红色比: 16.2 % 光通量绿色比: 79.9 % 光通量蓝色比: 3.9 %

显色指数: 94.9 AvgR: 93.6
R1: 97.8 R2: 96.0 R3: 91.3 R4: 95.3 R5: 96.0 R6: 90.4 R7: 95.3 R8: 97.3
R9: 95.3 R10: 88.6 R11: 94.5 R12: 74.7 R13: 97.8 R14: 94.9 R15: 98.7


色温: 5670 K 光通量: 2729.862 lm 峰值波长: 451.6 nm 色容差: 5.8
明暗视觉比: 2.2 中心波长: 451.9 nm 主波长: 491.7 nm 质心波长: 561.1 nm
半宽度: 25.3 nm 色偏差: -0.00242 色纯度: 1.5 % 色质指数: 87.9
LER(TM-30): 265.3 辐射功率: 10291.6 mw 色域指数(Rg): 102.2 逼真度(Rf): 90.4
红光辐射功率: 3039.5 mw 近红辐射功率: 502.9 mw 远红辐射功率: 37.3 mw

电参数:





光效: 28.9 Lm/W 能效: 31.5 能效等级: G
电压: 221.2 V 电流: 0.524 A 功率: 94.370 W 功率因素: 0.813

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:


Rf: 90.4 CCT: 5670K u': 0.2074
Rg: 102.2 LER: 265.3 Duv: -0.00242 v': 0.4729

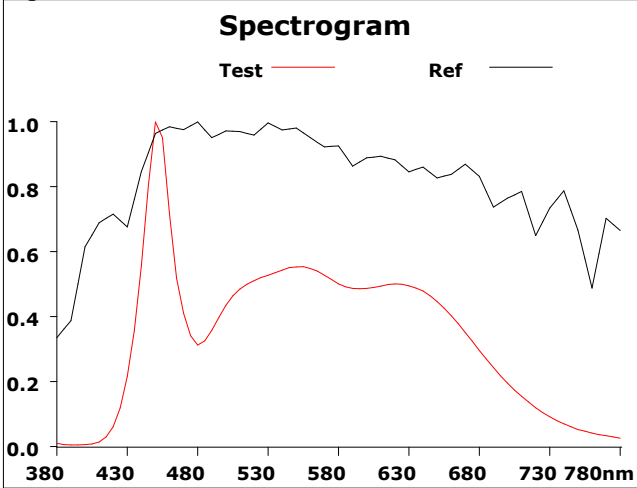


500			
Hue Bin	Rf	Chroma	Hue
1	94.1	-1.5%	-0.3%
2	94.4	-1.4%	1.9%
3	90.2	-0.4%	4.4%
4	90.5	0.3%	4.3%
5	88.7	0.8%	3.2%
6	94.8	2.9%	0.6%
7	96.8	0.1%	-0.5%
8	94.6	-1.8%	0.9%
9	91.1	-3.7%	5.7%
10	84.0	-2.1%	8.6%
11	79.0	1.8%	11.7%
12	88.2	2.6%	6.7%
13	90.9	6.1%	4.0%
14	91.1	4.5%	0.6%
15	85.2	10.4%	-6.9%
16	96.1	0.6%	-1.9%

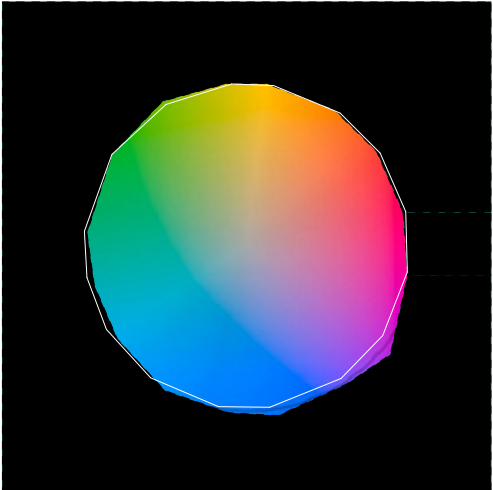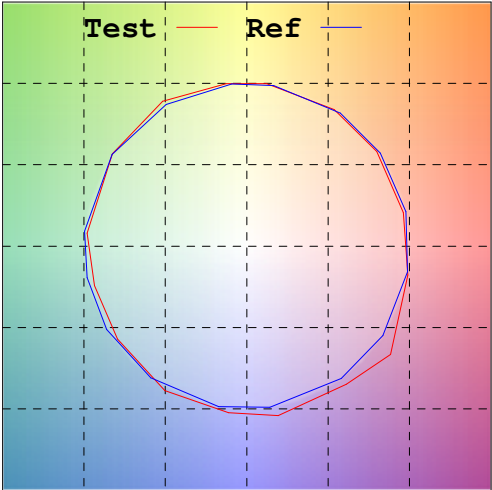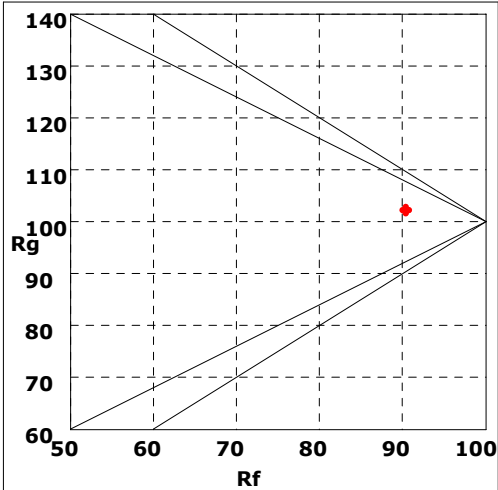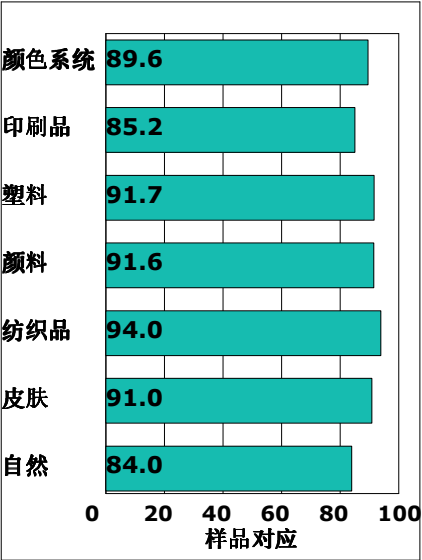

Rf by Bue



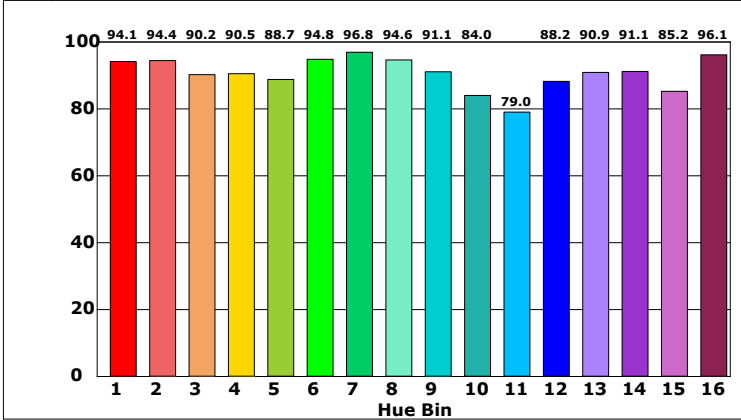


Chroma by Bue

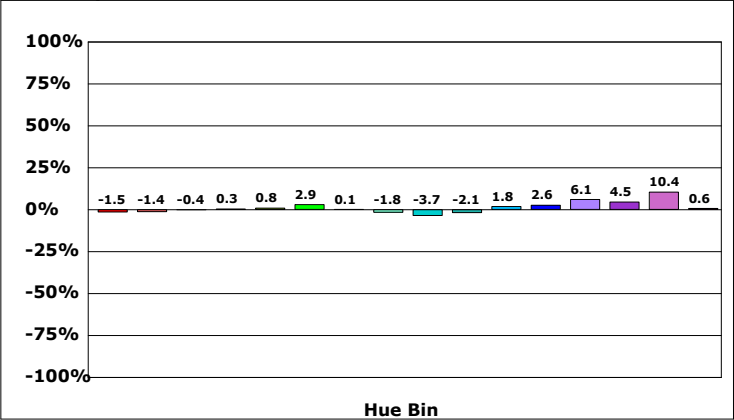

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23

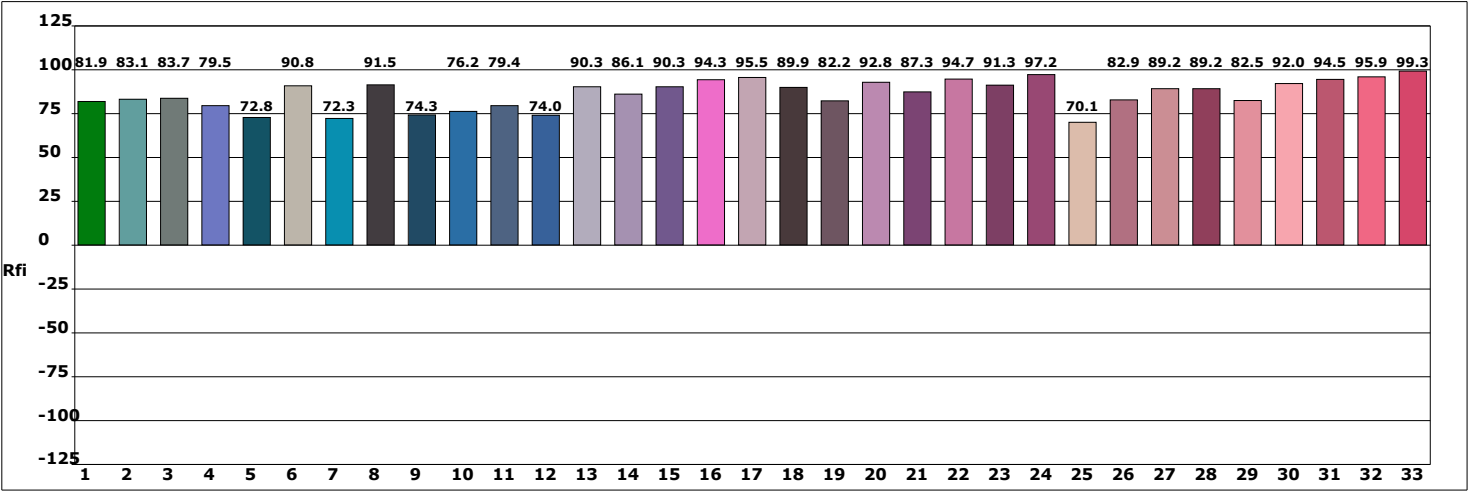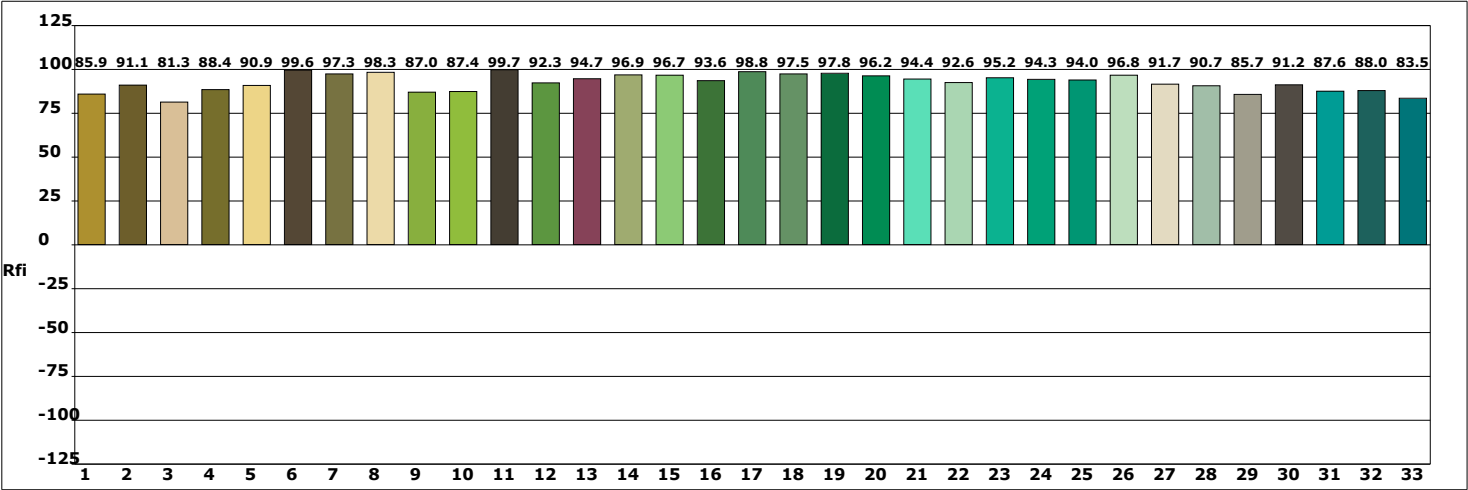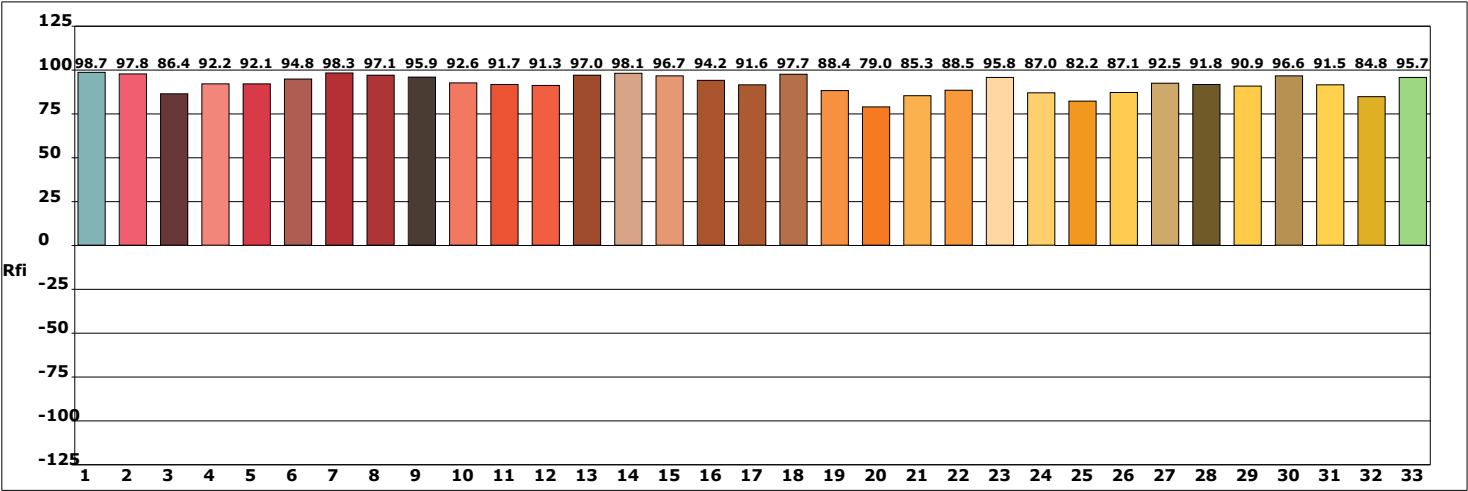

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23