



光谱图

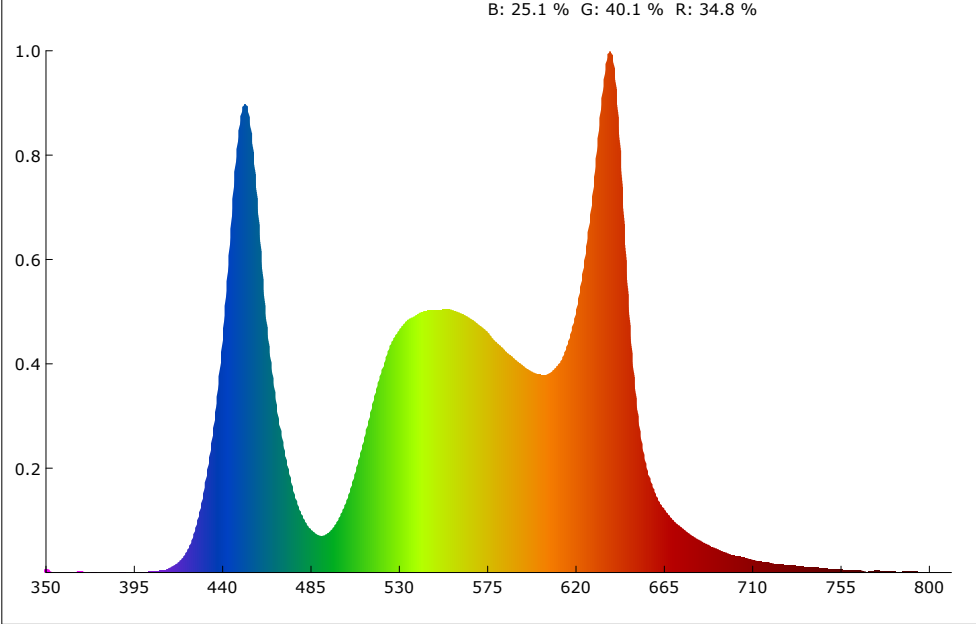

SDCM

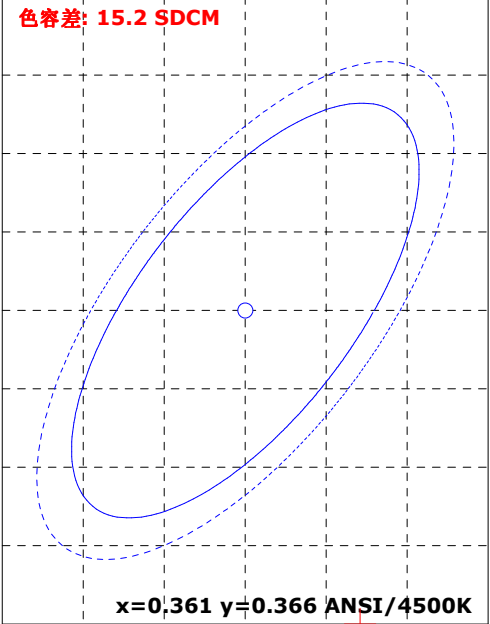

颜色参数:

坐标x: 0.3621 坐标y: 0.3368 坐标u: 0.2293 坐标v: 0.3199 坐标u': 0.2293 坐标v': 0.4798
红色比: 34.8 % 绿色比: 40.1 % 蓝色比: 25.1 % 光通量红色比: 19.7 % 光通量绿色比: 77.4 % 光通量蓝色比: 2.8 %

显色指数: 87.4 AvgR: 83.2
R1: 98.2 R2: 91.6 R3: 73.0 R4: 89.3 R5: 95.1 R6: 82.1 R7: 88.0 R8: 82.4
R9: 66.4 R10: 71.0 R11: 87.3 R12: 56.5 R13: 96.9 R14: 82.4 R15: 88.4


色温: 4268 K 光通量: 1062.139 lm 峰值波长: 637.5 nm 色容差: 15.2
明暗视觉比: 1.7 中心波长: 633.9 nm 主波长: 600.7 nm 质心波长: 558.6 nm
半宽度: 27.1 nm 色偏差: -0.01419 色纯度: 9.7 % 色质指数: 69.7
LER(TM-30): 303.5 辐射功率: 3500.1 mw 色域指数(Rg): 107.4 逼真度(Rf): 78.3
红光辐射功率: 1205.9 mw 近红辐射功率: 34.7 mw 远红辐射功率: 1.9 mw

电参数:




光效: 17.1 Lm/W 能效: 18.6 能效等级: G
电压: 220.4 V 电流: 0.463 A 功率: 62.220 W 功率因素: 0.608

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:02/03/13
备注:


Rf: 78.3 CCT: 4268K u': 0.2293
Rg: 107.4 LER: 303.5 Duv: -0.01419 v': 0.4798

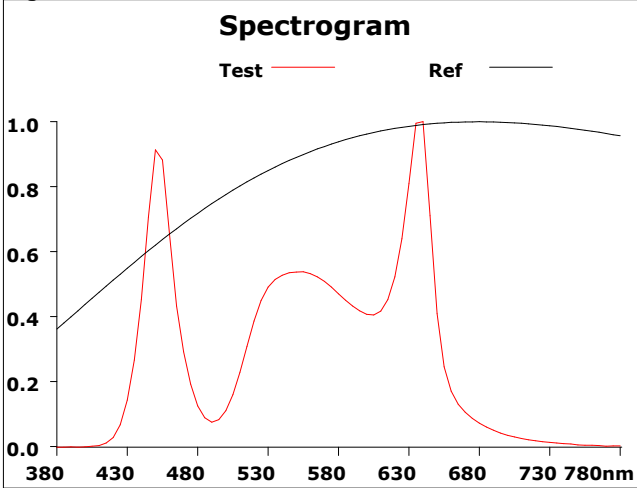

500			
Hue Bin	Rf	Chroma	Hue
1	88.9	0.7%	-0.8%
2	91.7	-0.7%	1.7%
3	75.5	0.4%	11.1%
4	74.7	2.9%	14.0%
5	77.1	7.3%	10.1%
6	81.7	10.6%	2.3%
7	88.9	2.9%	-4.4%
8	91.0	-0.8%	-2.8%
9	86.2	-7.4%	4.4%
10	64.5	-7.7%	16.7%
11	58.1	-0.2%	24.4%
12	62.6	5.4%	19.2%
13	77.2	11.0%	14.5%
14	73.8	11.2%	9.4%
15	80.0	13.3%	-0.7%
16	80.1	9.5%	-7.5%

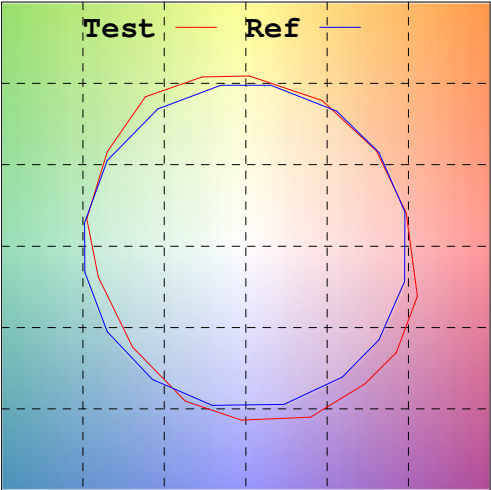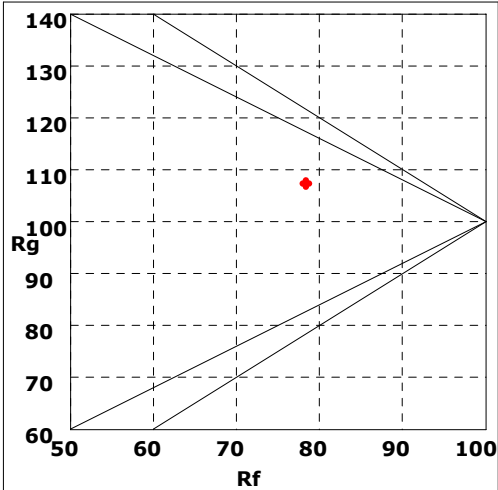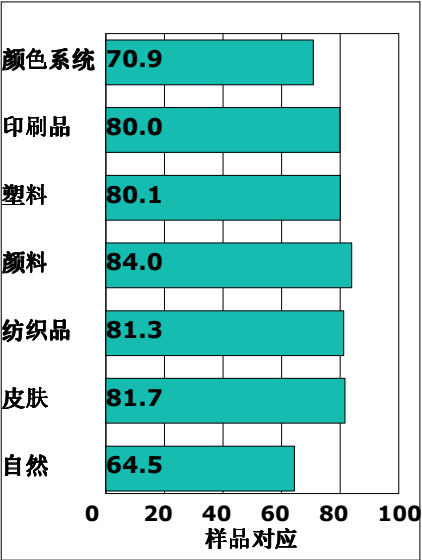

Rf by Bue

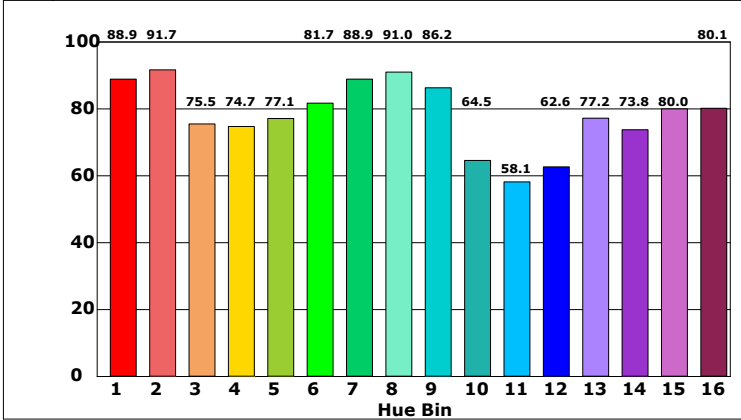

Chroma by Bue

