



光谱图

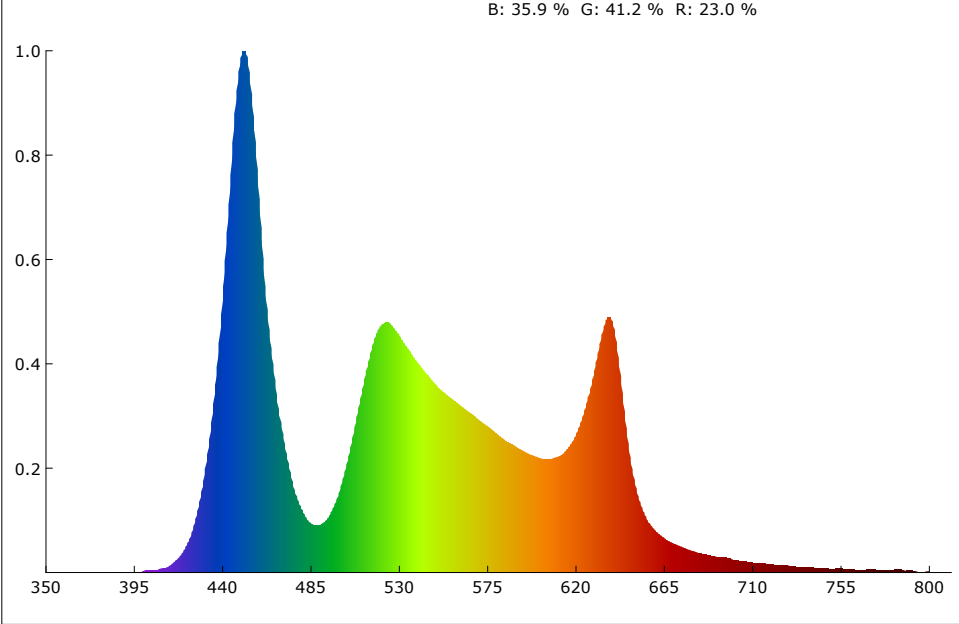

SDCM

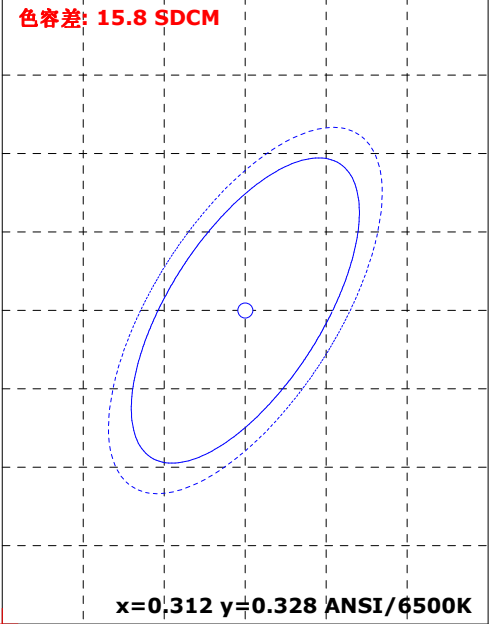

颜色参数:

坐标x: 0.2921 坐标y: 0.3004 坐标u: 0.1941 坐标v: 0.2994 坐标u': 0.1941 坐标v': 0.4491
红色比: 23.0 % 绿色比: 41.2 % 蓝色比: 35.9 % 光通量红色比: 14.1 % 光通量绿色比: 81.7 % 光通量蓝色比: 4.2 %

显色指数: 86.5 AvgR: 82.3
R1: 99.2 R2: 87.8 R3: 71.4 R4: 85.5 R5: 95.6 R6: 81.7 R7: 86.7 R8: 84.1
R9: 68.9 R10: 66.0 R11: 81.8 R12: 52.5 R13: 96.3 R14: 83.0 R15: 93.3


色温: 8367 K 光通量: 1002.496 lm 峰值波长: 451.6 nm 色容差: 15.8
明暗视觉比: 2.4 中心波长: 451.6 nm 主波长: 480.5 nm 质心波长: 536.0 nm
半宽度: 23.2 nm 色偏差: -0.00056 色纯度: 16.9 % 色质指数: 84.6
LER(TM-30): 284.4 辐射功率: 3525.1 mw 色域指数(Rg): 104.4 逼真度(Rf): 81.7
红光辐射功率: 798.8 mw 近红辐射功率: 40.5 mw 远红辐射功率: 3.9 mw

电参数:

光效: 17.5 Lm/W 能效: 19.1 能效等级: G
电压: 220.4 V 电流: 0.430 A 功率: 57.300 W 功率因素: 0.603

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:02/03/13
备注:

Rf: 81.7 CCT: 8367K u': 0.1941
Rg: 104.4 LER: 284.4 Duv: -0.00056 v': 0.4491

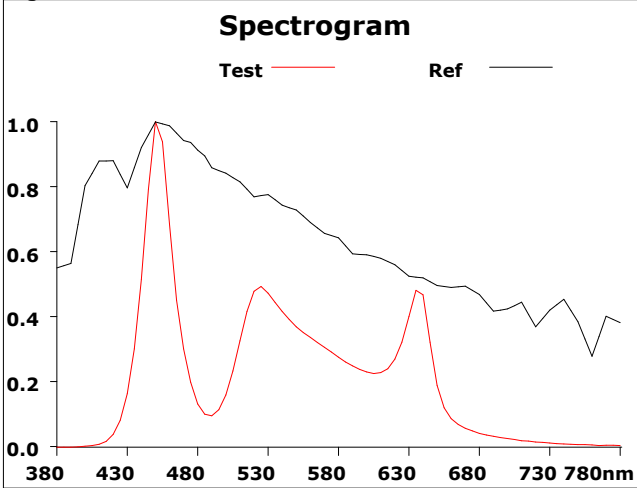

500			
Hue Bin	Rf	Chroma	Hue
1	88.4	2.7%	-1.4%
2	96.6	-0.8%	0.6%
3	87.1	0.1%	4.6%
4	80.4	0.7%	10.3%
5	79.8	2.0%	6.8%
6	86.8	6.5%	2.8%
7	93.1	2.7%	-2.6%
8	85.6	-5.8%	1.4%
9	84.1	-9.4%	10.4%
10	69.9	-6.8%	18.5%
11	52.5	-0.5%	21.7%
12	74.8	2.4%	17.1%
13	77.6	9.3%	13.9%
14	84.3	5.8%	5.5%
15	77.0	19.9%	-0.1%
16	88.5	4.2%	-2.5%

