



光谱图

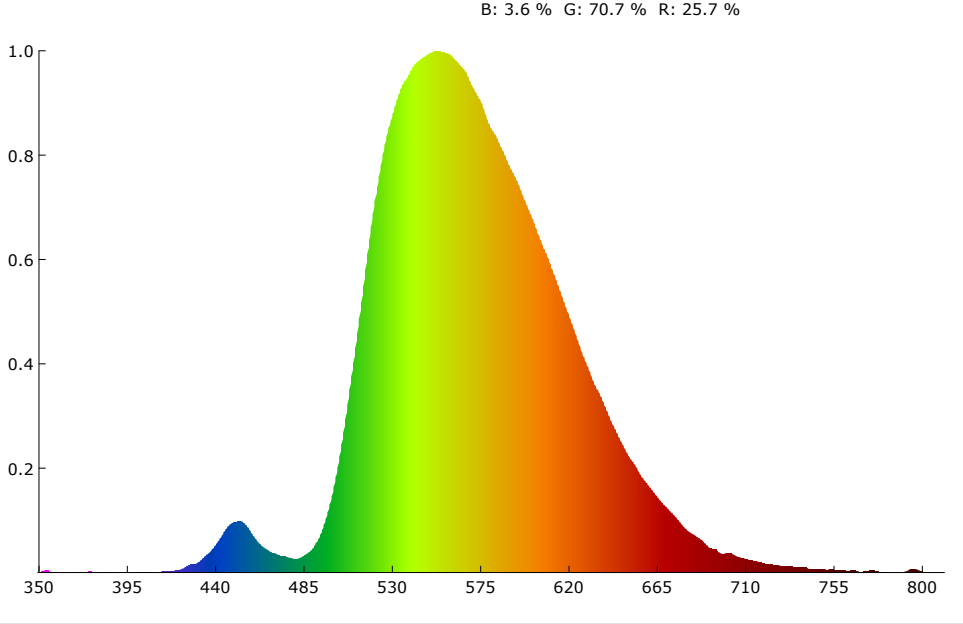

SDCM

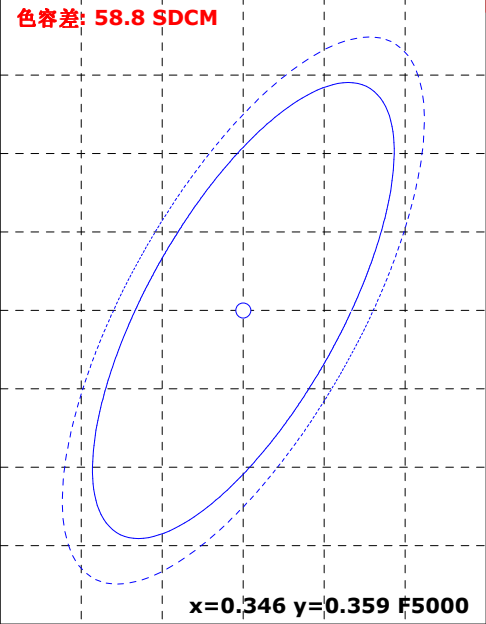

颜色参数:

坐标x: 0.4209 坐标y: 0.5298 坐标u: 0.1977 坐标v: 0.3733 坐标u': 0.1977 坐标v': 0.5599
红色比: 25.7 % 绿色比: 70.7 % 蓝色比: 3.6 % 光通量红色比: 11.3 % 光通量绿色比: 88.4 % 光通量蓝色比: 0.3 %

显色指数: 52.2 AvgR: 34.4
R1: 40.9 R2: 58.4 R3: 77.9 R4: 42.7 R5: 40.0 R6: 46.3 R7: 82.2 R8: 29.6
R9: -99.0 R10: 8.8 R11: 26.9 R12: 1.8 R13: 42.9 R14: 88.7 R15: 27.8


色温: 4012 K 光通量: 1424.519 lm 峰值波长: 556.5 nm 色容差: 58.8
明暗视觉比: 1.2 中心波长: 566.6 nm 主波长: 568.8 nm 质心波长: 571.9 nm
半宽度: 104.8 nm 色偏差: 0.04758 色纯度: 85.5 % 色质指数: 64.2
LER(TM-30): 471.1 辐射功率: 3023.9 mw 色域指数(Rg): 63.4 逼真度(Rf): 57.2
红光辐射功率: 769.0 mw 近红辐射功率: 27.3 mw 远红辐射功率: 1.5 mw

电参数:







光效: 19.7 Lm/W 能效: 21.4 能效等级: G
电压: 220.3 V 电流: 0.532 A 功率: 72.460 W 功率因素: 0.617

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:02/03/13
备注:

Rf: 57.2 CCT: 4012K u': 0.1977
Rg: 63.4 LER: 471.1 Duv: 0.04758 v': 0.5599

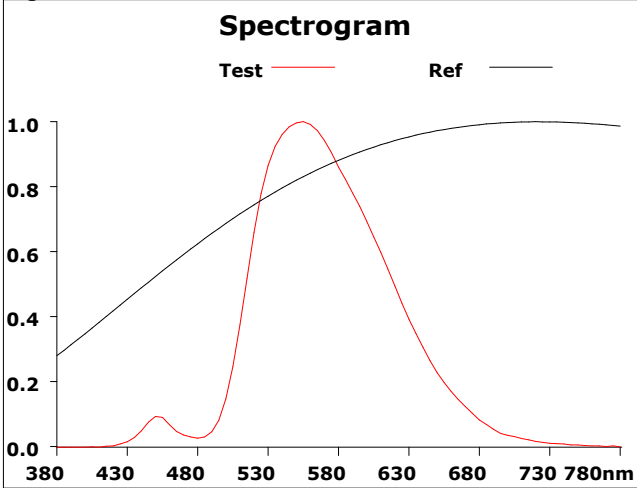

500			
Hue Bin	Rf	Chroma	Hue
1	48.1	-26.8%	-3.8%
2	54.8	-22.0%	-1.9%
3	47.0	-25.4%	0.9%
4	57.1	-24.5%	2.0%
5	58.1	-27.5%	5.4%
6	55.7	-27.1%	5.2%
7	53.6	-26.9%	8.1%
8	54.4	-24.4%	6.8%
9	59.7	-23.2%	13.8%
10	43.3	-22.6%	23.2%
11	63.2	-10.8%	19.0%
12	71.7	-7.0%	9.9%
13	76.9	-7.6%	-5.2%
14	74.9	-5.4%	-10.3%
15	60.4	-15.3%	-17.1%
16	55.3	-18.9%	-13.2%

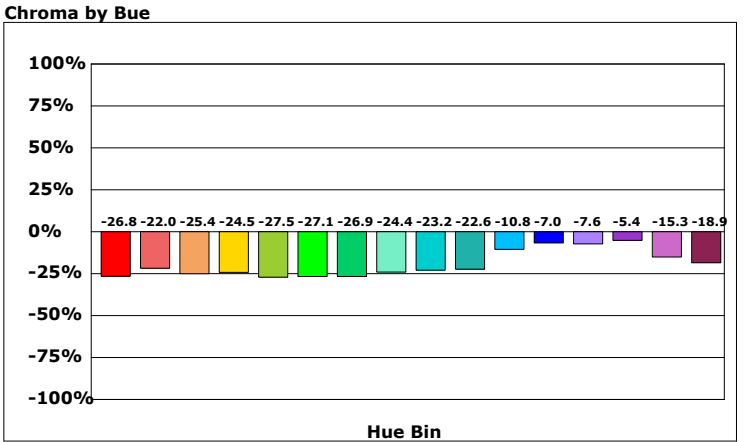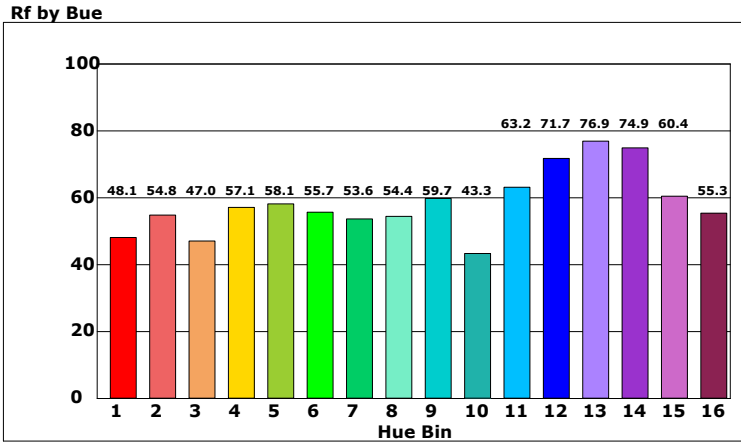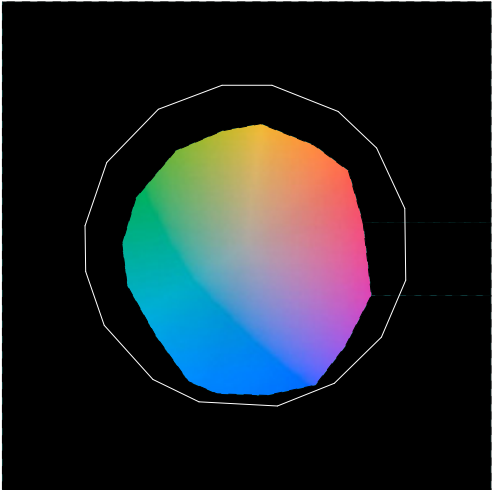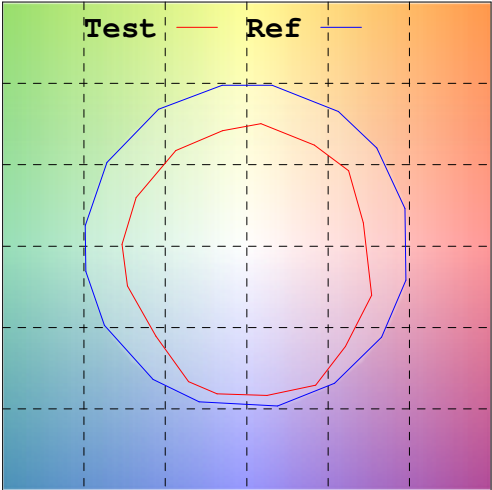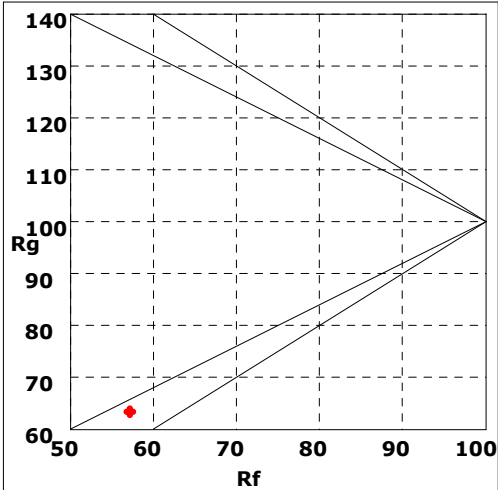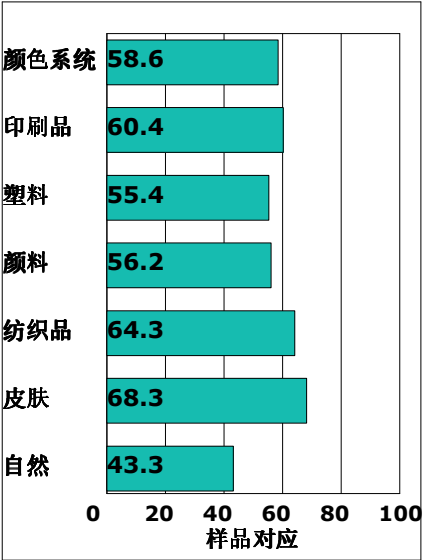

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:02/03/13

