



光谱图

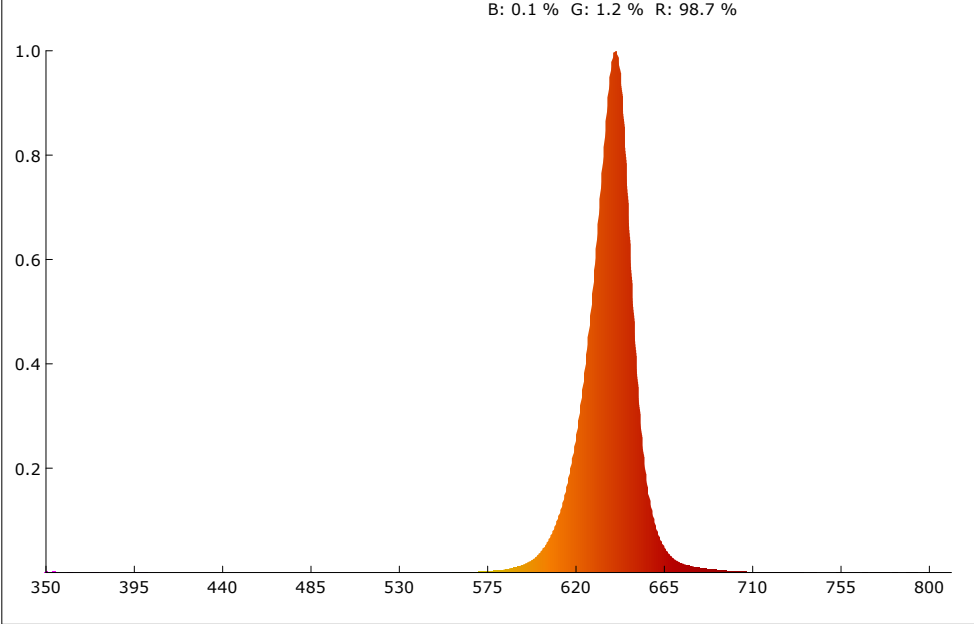

SDCM

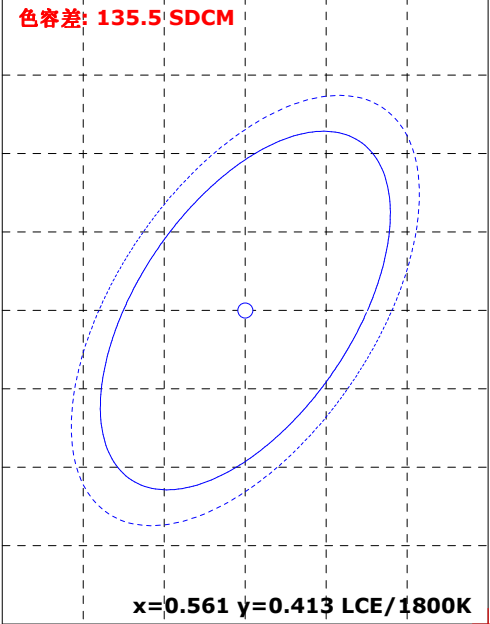

颜色参数:

坐标x: 0.7016 坐标y: 0.2970 坐标u: 0.5438 坐标v: 0.3453 坐标u': 0.5438 坐标v': 0.5179
红色比: 98.7 % 绿色比: 1.2 % 蓝色比: 0.1 % 光通量红色比: 95.4 % 光通量绿色比: 4.5 % 光通量蓝色比: 0.0 %

显色指数: 25.2 AvgR: 22.2
R1: 11.2 R2: 75.9 R3: 45.4 R4: -7.4 R5: 17.9 R6: 91.6 R7: 16.2 R8: -48.5
R9: -99.0 R10: 70.4 R11: 3.8 R12: 78.9 R13: 31.0 R14: 67.6 R15: -21.3


色温: 1000 K 光通量: 415.660 lm 峰值波长: 640.5 nm 色容差: 135.5
明暗视觉比: 0.1 中心波长: 638.9 nm 主波长: 626.6 nm 质心波长: 637.2 nm
半宽度: 21.6 nm 色偏差: 0.04650 色纯度: 99.6 % 色质指数: -nan(ind)
LER(TM-30): 146.4 辐射功率: 2839.4 mw 色域指数(Rg): 62.7 逼真度(Rf): 29.4
红光辐射功率: 2787.2 mw 近红辐射功率: 10.2 mw 远红辐射功率: 2.3 mw

电参数:




光效: 6.8 Lm/W 能效: 7.4 能效等级: G
电压: 220.5 V 电流: 0.459 A 功率: 61.370 W 功率因素: 0.605

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:02/03/13
备注:


Rf: 29.4 CCT: 1000K u': 0.5438
Rg: 62.7 LER: 146.4 Duv: 0.0000 v': 0.5179

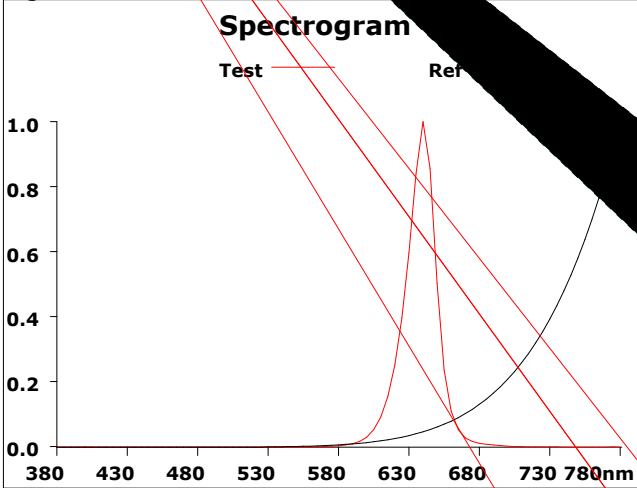


500			
Hue Bin	Rf	Chroma	Hue
1	14.9	-57.6%	20.3%
2	58.4	-47.1%	46.7%
3	73.0	-9.2%	70.7%
4	100.0	nan%	-nan(ind)%
5	96.2	4.7%	13.4%
6	100.0	nan%	-nan(ind)%
7	69.3	5.0%	2.6%
8	21.7	-40.5%	-15.4%
9	10.5	-48.6%	10.0%
10	17.7	-59.6%	37.2%
11	64.0	11.1%	46.4%
12	51.0	1.0%	-91.5%
13	36.8	-57.5%	
14	72.5	9.9%	
15	78.5		
16	24.8	-3.0%	

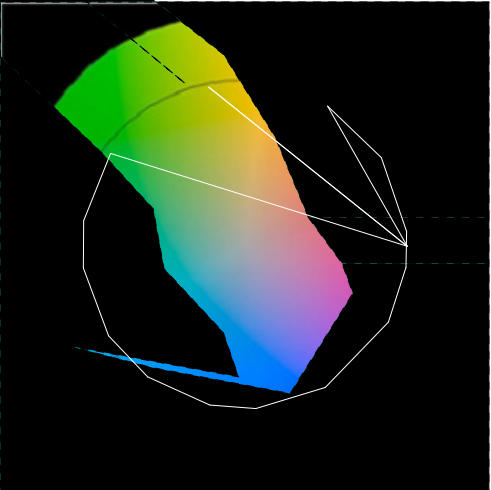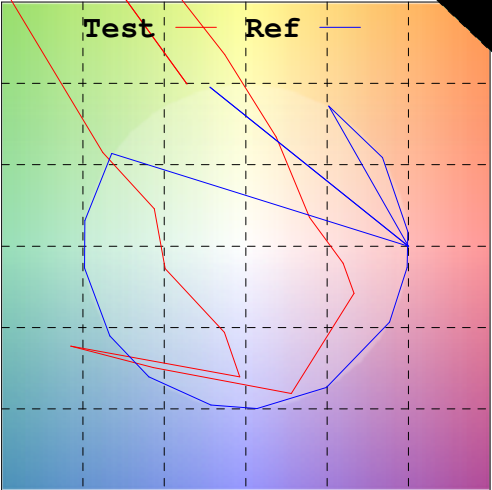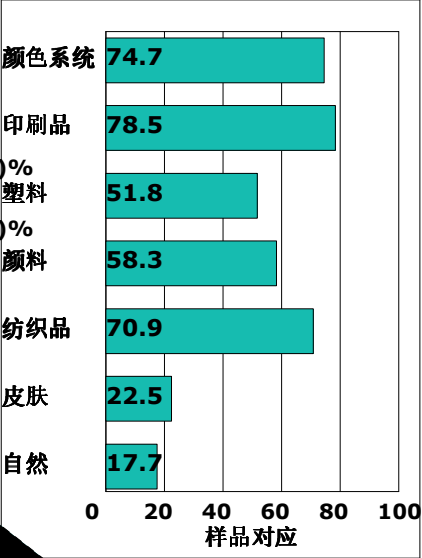

Rf by Bue

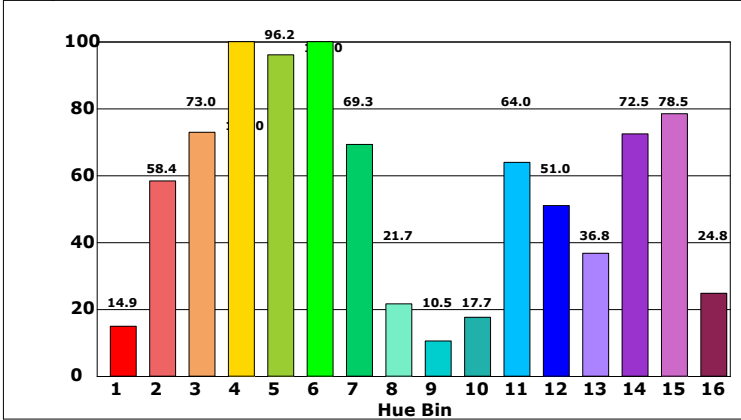

Chroma by Bue

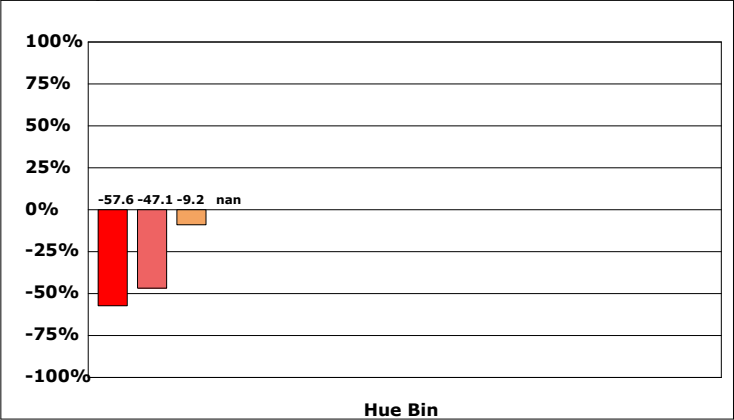

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173