



光谱图

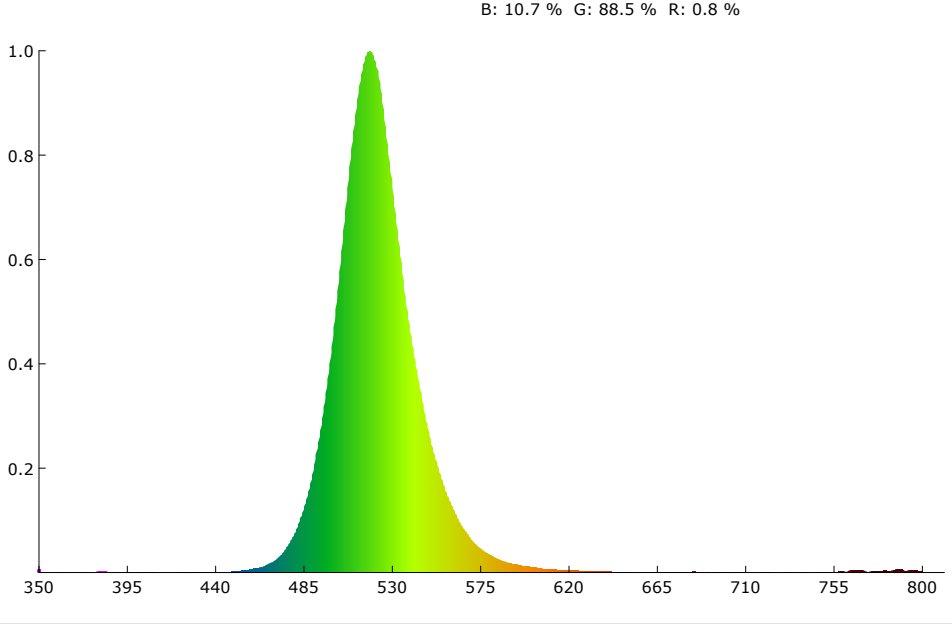

SDCM

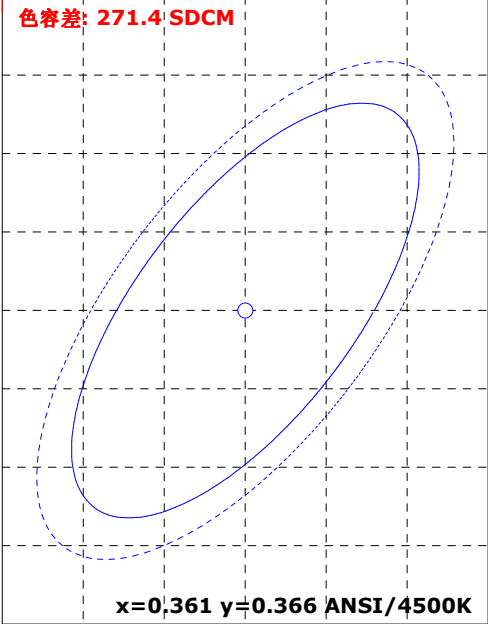

颜色参数:

坐标x: 0.1623 坐标y: 0.7017 坐标u: 0.0585 坐标v: 0.3794 坐标u': 0.0585 坐标v': 0.5691
红色比: 0.8 % 绿色比: 88.5 % 蓝色比: 10.7 % 光通量红色比: 0.4 % 光通量绿色比: 98.6 % 光通量蓝色比: 1.0 %

显色指数: -17.9 AvgR: -30.7
R1: -32.7 R2: -1.3 R3: -9.4 R4: -58.6 R5: -8.3 R6: -8.8 R7: 2.8 R8: -26.9
R9: -99.0 R10: -89.4 R11: -85.3 R12: -21.5 R13: -37.2 R14: 45.1 R15: -30.7


色温: 8016 K 光通量: 1434.688 lm 峰值波长: 518.7 nm 色容差: 271.4
明暗视觉比: 3.0 中心波长: 519.8 nm 主波长: 523.6 nm 质心波长: 524.2 nm
半宽度: 36.0 nm 色偏差: 0.15686 色纯度: 74.1 % 色质指数: 0.5
LER(TM-30): 458.2 辐射功率: 3131.3 mw 色域指数(Rg): 11.1 逼真度(Rf): 1.5
红光辐射功率: 24.2 mw 近红辐射功率: 10.4 mw 远红辐射功率: 7.6 mw

电参数:


光效: 16.0 Lm/W 能效: 17.4 能效等级: G
电压: 220.4 V 电流: 0.645 A 功率: 89.750 W 功率因素: 0.631

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:02/03/13
备注:


Rf: 1.5 CCT: 8016K u': 0.0585
Rg: 11.1 LER: 458.2 Duv: 0.15686 v': 0.5691

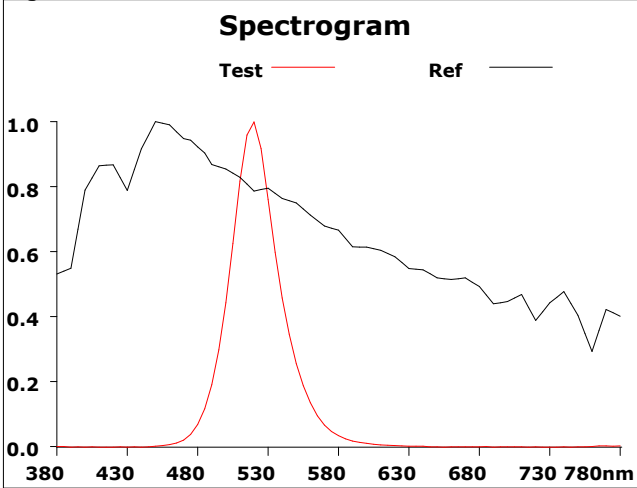

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-82.1%	-1.9%
2	0.0	-68.4%	4.0%
3	0.5	-70.8%	-1.2%
4	5.6	-53.8%	-7.7%
5	2.3	-68.0%	-2.8%
6	1.4	-74.2%	-3.2%
7	0.8	-70.1%	-0.3%
8	0.0	-76.0%	7.0%
9	22.2	-59.3%	33.8%
10	14.1	-46.9%	21.3%
11	5.9	-42.3%	6.3%
12	32.4	-39.1%	-19.6%
13	27.3	-48.0%	-26.4%
14	0.3	-60.0%	-42.6%
15	3.4	-74.7%	-52.8%
16	0.0	-77.8%	-23.0%

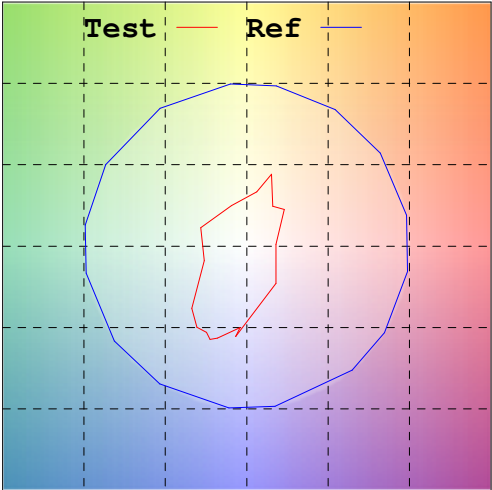

Rf by Bue

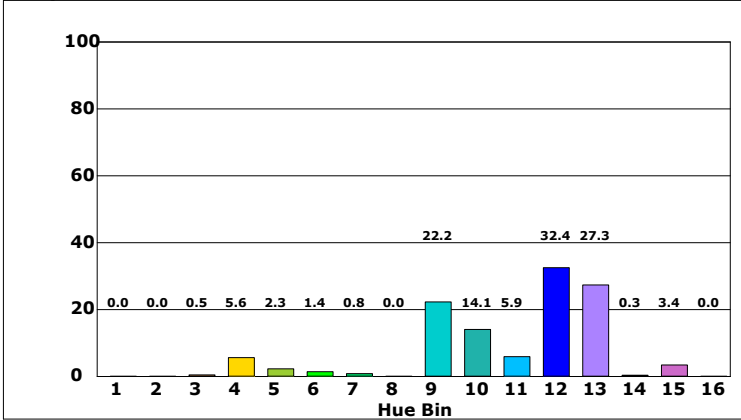

Chroma by Bue

