


光谱图

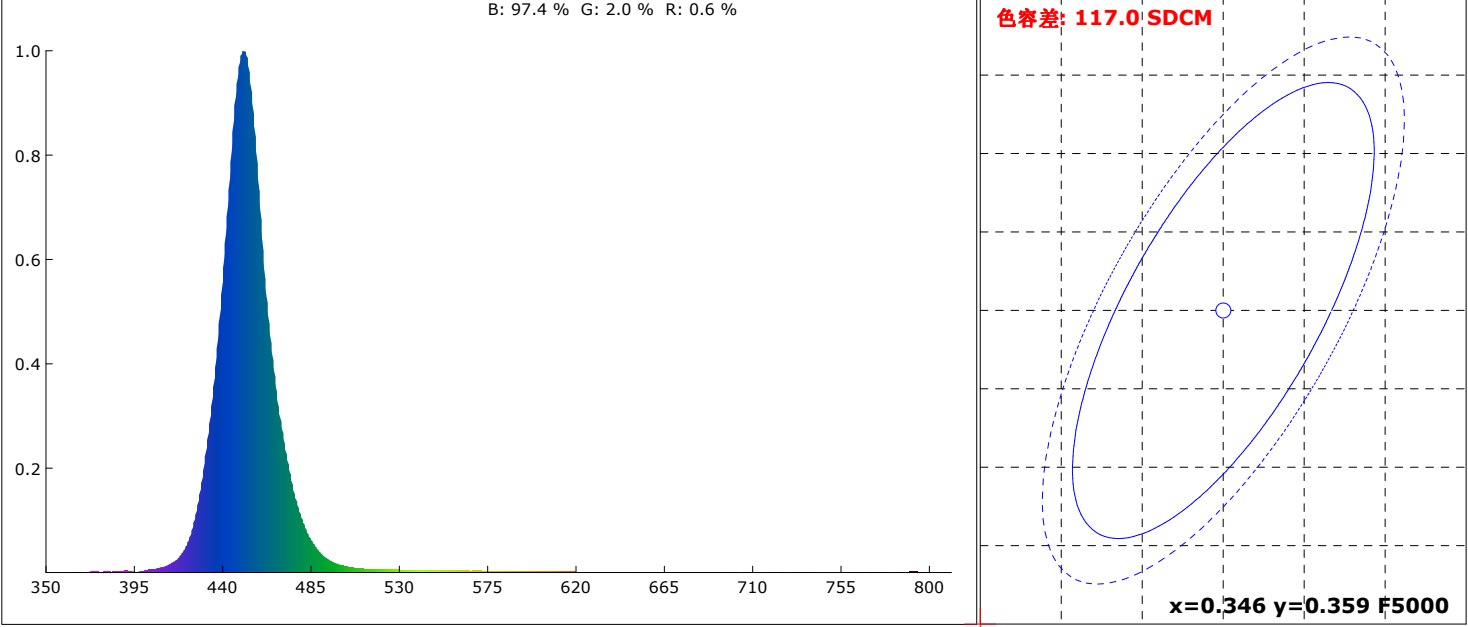

颜色参数:

坐标x: 0.1543 坐标y: 0.0344 坐标u: 0.1988 坐标v: 0.0665 坐标u': 0.1988 坐标v': 0.0997
红色比: 0.6 % 绿色比: 2.0 % 蓝色比: 97.4 % 光通量红色比: 2.4 % 光通量绿色比: 25.7 % 光通量蓝色比: 71.9 %

显色指数: -46.1 AvgR: -46.2
R1: 22.7 R2: -30.4 R3: -99.0 R4: -95.9 R5: 27.7 R6: -35.8 R7: -55.2 R8: -42.5
R9: -99.0 R10: -99.0 R11: -99.0 R12: -95.3 R13: 7.9 R14: -34.2 R15: 33.7


色温: 99999 K 光通量: 346.176 lm 峰值波长: 450.6 nm 色容差: 117.0
明暗视觉比: 18.1 中心波长: 451.4 nm 主波长: 456.8 nm 质心波长: 456.1 nm
半宽度: 24.3 nm 色偏差: 0.15686 色纯度: 96.9 % 色质指数: 0.3
LER(TM-30): 44.7 辐射功率: 7752.8 mw 色域指数(Rg): nan 逼真度(Rf): -nan(ind)
红光辐射功率: 49.9 mw 近红辐射功率: 12.9 mw 远红辐射功率: 8.1 mw

电参数:


光效: 4.6 Lm/W 能效: 5.0 能效等级: G
电压: 220.3 V 电流: 0.554 A 功率: 75.730 W 功率因素: 0.620

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:02/03/13
备注:

Rf: -nan(ind) CCT: 99999K u': 0.1988
Rg: nan LER: 44.7 Duv: 0.15686 v': 0.0997

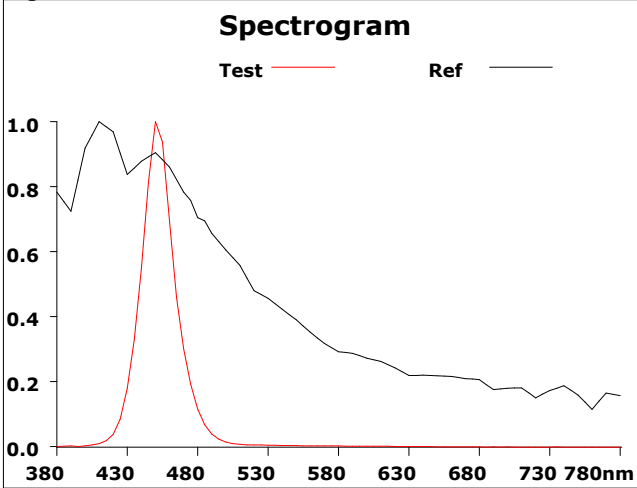

500			
Hue Bin	Rf	Chroma	Hue
1	-nan(ind)	nan%	-nan(ind)%
2	0.0	-37.5%	44.4%
3	-nan(ind)	nan%	-nan(ind)%
4	-nan(ind)	nan%	-nan(ind)%
5	-nan(ind)	nan%	-nan(ind)%
6	-nan(ind)	nan%	-nan(ind)%
7	-nan(ind)	nan%	-nan(ind)%
8	-nan(ind)	nan%	-nan(ind)%
9	-nan(ind)	nan%	-nan(ind)%
10	-nan(ind)	nan%	-nan(ind)%
11	0.0	26.1%	-291.6%
12	0.0	-88.7%	-466.2%
13	0.0	-269.5%	-395.5%
14	0.0	-397.4%	-291.6%
15	0.0	-564.2%	-192.3%
16	0.0	-437.6%	21.3%

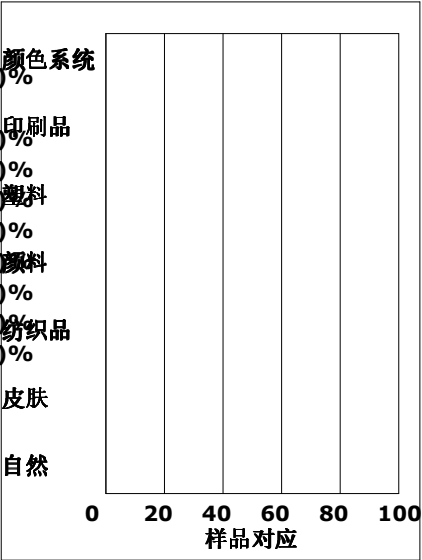

ERROR: rangecheck
OFFENDING COMMAND: roll

STACK:

2
4
-2.14748e+011
-2.14748e+012