



光谱图

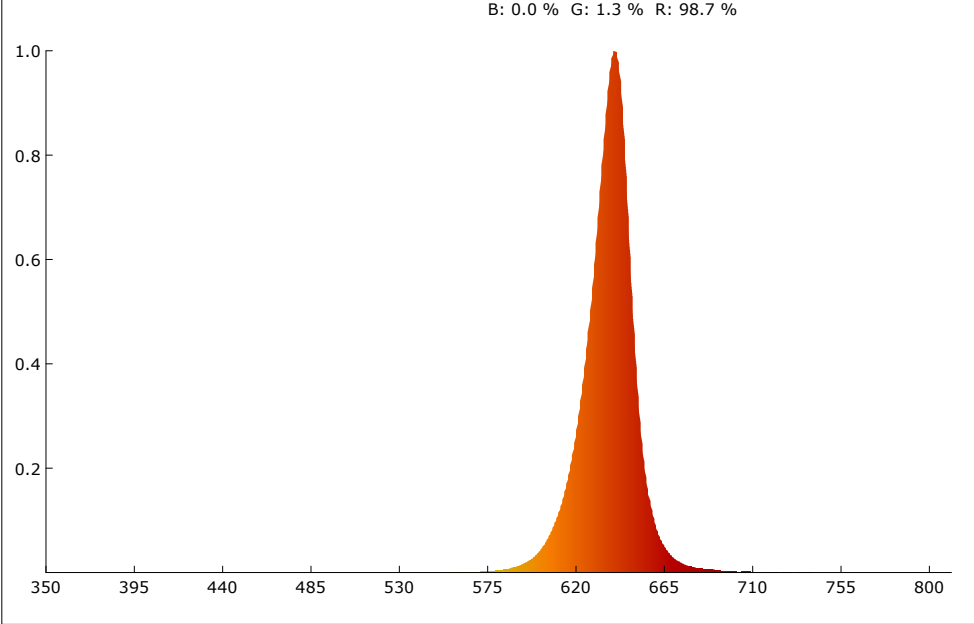

SDCM

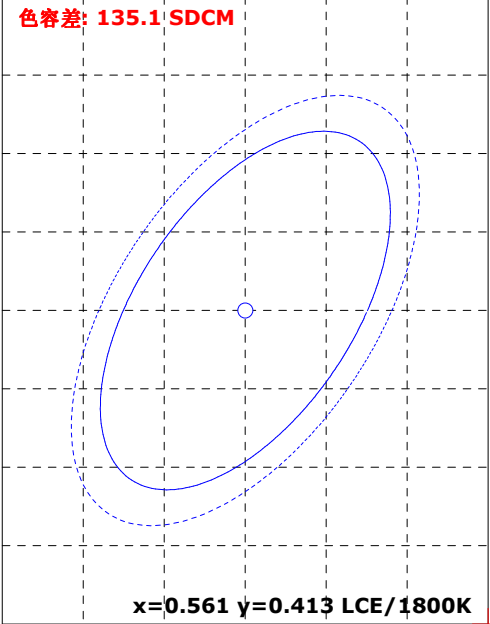

颜色参数:

坐标x: 0.7016 坐标y: 0.2979 坐标u: 0.5427 坐标v: 0.3456 坐标u': 0.5427 坐标v': 0.5184
红色比: 98.7 % 绿色比: 1.3 % 蓝色比: 0.0 % 光通量红色比: 95.3 % 光通量绿色比: 4.7 % 光通量蓝色比: 0.0 %

显色指数: 24.8 AvgR: 21.9
R1: 10.6 R2: 75.4 R3: 45.5 R4: -8.6 R5: 16.4 R6: 90.2 R7: 17.0 R8: -47.7
R9: -99.0 R10: 69.4 R11: 2.1 R12: 80.1 R13: 30.3 R14: 67.6 R15: -21.4


色温: 1000 K 光通量: 404.504 lm 峰值波长: 640.5 nm 色容差: 135.1
明暗视觉比: 0.0 中心波长: 638.5 nm 主波长: 625.9 nm 质心波长: 637.1 nm
半宽度: 21.4 nm 色偏差: -0.00056 色纯度: 99.9 % 色质指数: -nan(ind)
LER(TM-30): 149.0 辐射功率: 2715.2 mw 色域指数(Rg): 28.2 逼真度(Rf): 27.6
红光辐射功率: 2673.2 mw 近红辐射功率: 6.8 mw 远红辐射功率: 0.3 mw

电参数:





光效: 6.6 Lm/W 能效: 7.2 能效等级: G
电压: 220.4 V 电流: 0.455 A 功率: 61.070 W 功率因素: 0.608

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:02/03/13
备注:


Rf: 27.6 CCT: 1000K u': 0.5427
Rg: 28.2 LER: 149.0 Duval: 00056 v': 0.5184

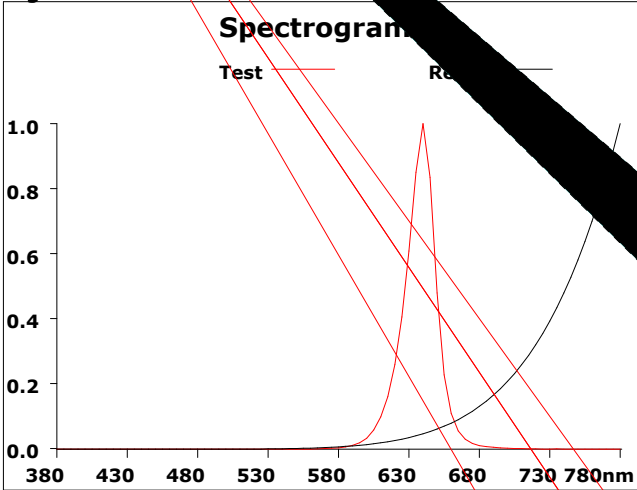

500			
Hue Bin	Rf	Chroma	Hue
1	18.8	-57.2%	5.5%
2	59.9	-63.2%	8.0%
3	77.9	-59.2%	24.8%
4	100.0	nan%	-nan(ind)%
5	85.9	-47.9%	20.6%
6	100.0	nan%	-nan(ind)%
7	64.1	-8.0%	22.9%
8	20.9	-42.9%	-8.3%
9	7.4	-52.6%	-2.4%
10	13.0	-74.7%	12.3%
11	11.5	-62.5%	19.9%
12	35.1	-63.4%	-106.0%
13	41.6	-36.7%	-53.2%
14	41.6	6%	3.5%
15	73.4		10.1%
16	24.3		7.0%

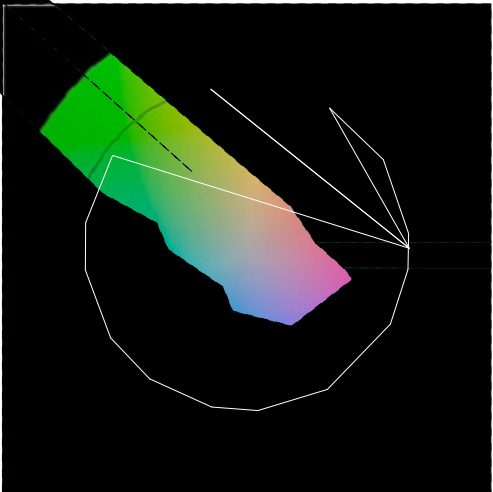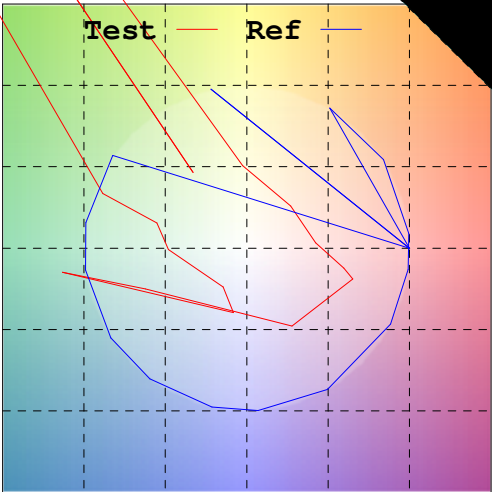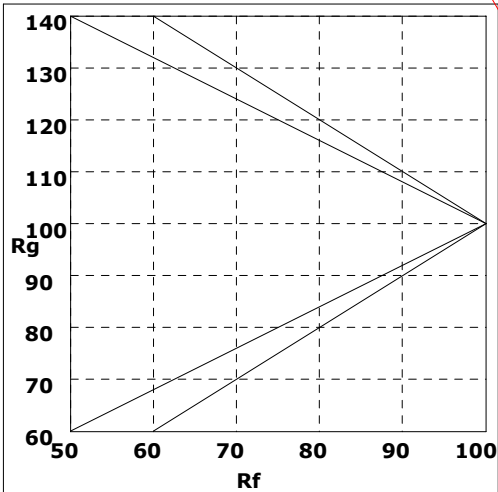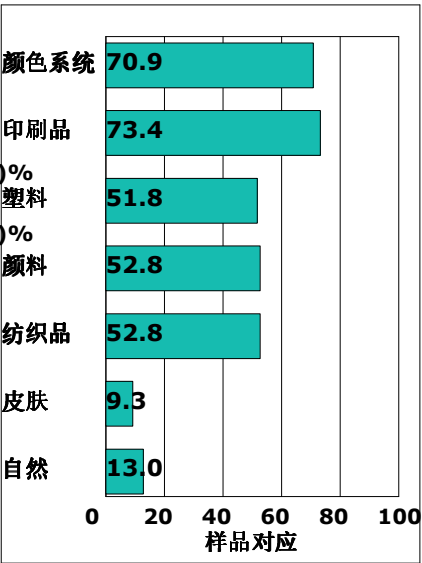

Rf by Bue

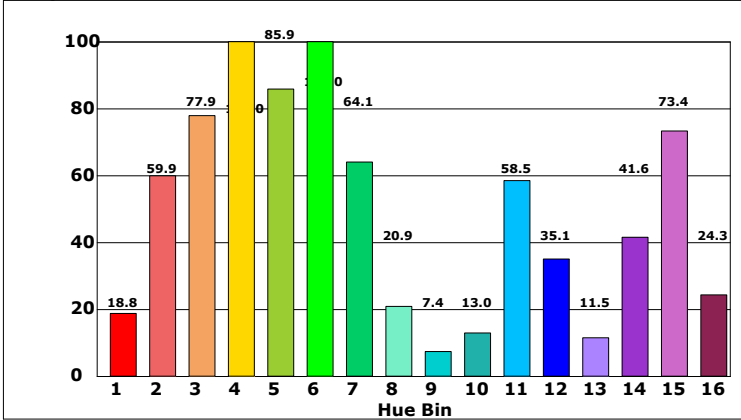

Chroma by Bue



ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173