



光谱图

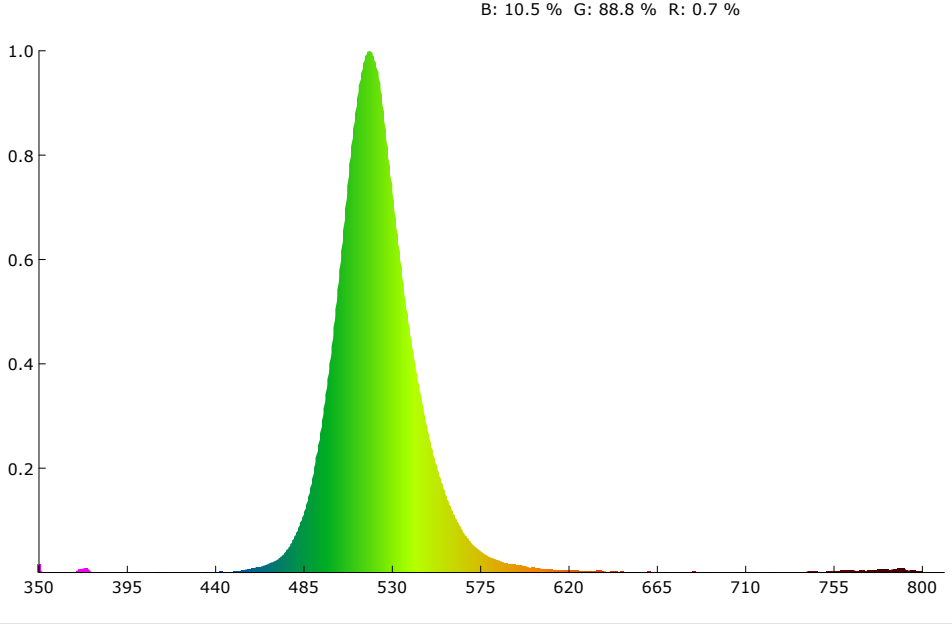

SDCM

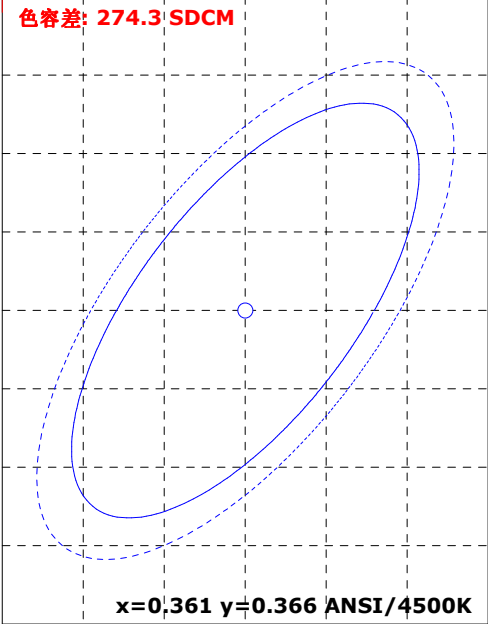

颜色参数:

坐标x: 0.1595 坐标y: 0.7046 坐标u: 0.0573 坐标v: 0.3796 坐标u': 0.0573 坐标v': 0.5694
红色比: 0.7 % 绿色比: 88.8 % 蓝色比: 10.5 % 光通量红色比: 0.4 % 光通量绿色比: 98.7 % 光通量蓝色比: 0.9 %

显色指数: -18.7 AvgR: -31.7
R1: -32.9 R2: -2.9 R3: -11.8 R4: -59.7 R5: -8.4 R6: -9.8 R7: 1.9 R8: -26.6
R9: -99.0 R10: -92.9 R11: -86.6 R12: -22.5 R13: -38.2 R14: 44.1 R15: -30.6


色温: 8143 K 光通量: 1311.212 lm 峰值波长: 518.7 nm 色容差: 274.3
明暗视觉比: 3.0 中心波长: 519.6 nm 主波长: 523.3 nm 质心波长: 524.3 nm
半宽度: 35.8 nm 色偏差: 0.15800 色纯度: 74.6 % 色质指数: 0.5
LER(TM-30): 456.7 辐射功率: 2870.8 mw 色域指数(Rg): 10.6 逼真度(Rf): 1.4
红光辐射功率: 21.1 mw 近红辐射功率: 12.5 mw 远红辐射功率: 8.4 mw

电参数:



光效: 14.7 Lm/W 能效: 16.0 能效等级: G
电压: 220.6 V 电流: 0.640 A 功率: 89.060 W 功率因素: 0.631

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:02/03/13
备注:


Rf: 1.4 CCT: 8143K u': 0.0573
Rg: 10.6 LER: 456.7 Duv: 0.15800 v': 0.5694

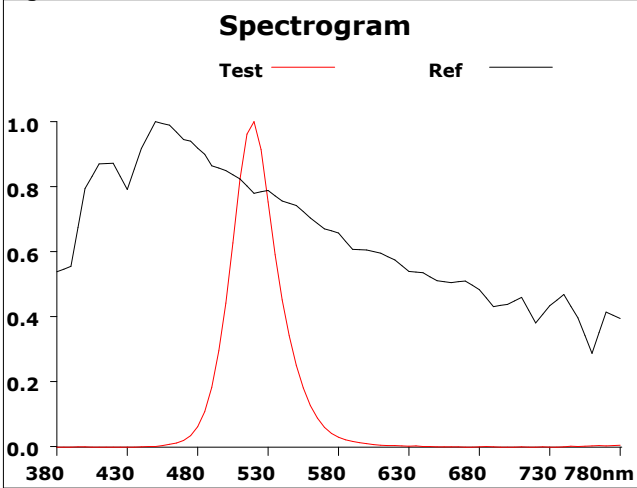

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-82.5%	-1.9%
2	0.0	-69.3%	4.0%
3	0.4	-71.5%	-1.3%
4	5.0	-54.5%	-7.6%
5	2.0	-68.6%	-2.7%
6	1.3	-74.8%	-3.2%
7	0.7	-71.0%	-0.5%
8	0.0	-76.8%	6.9%
9	21.6	-60.2%	33.7%
10	12.9	-47.9%	21.4%
11	5.1	-43.2%	6.6%
12	31.7	-40.0%	-19.1%
13	27.0	-48.7%	-25.8%
14	0.3	-60.6%	-42.2%
15	3.6	-75.0%	-52.1%
16	0.0	-78.6%	-23.1%

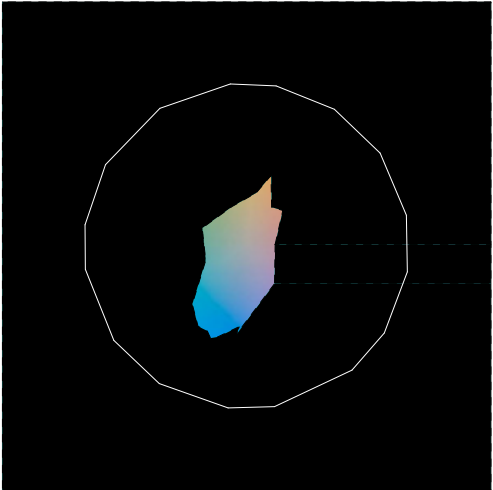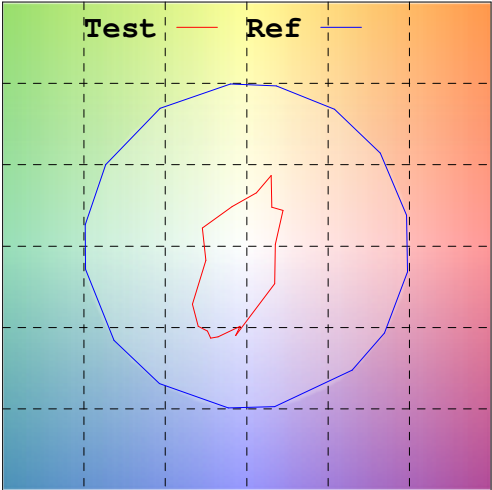

Rf by Bue

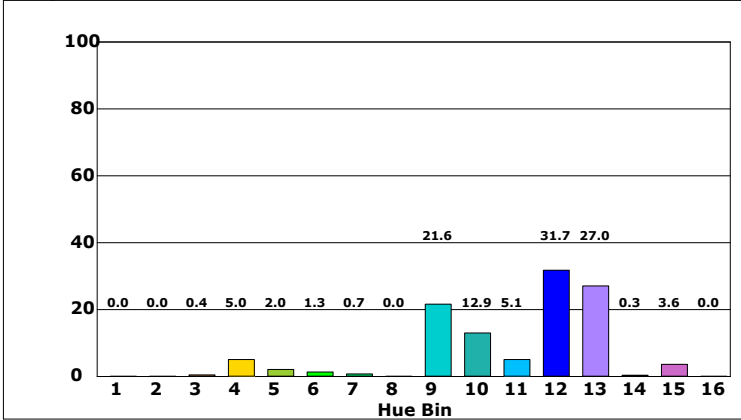

Chroma by Bue

