



光谱图

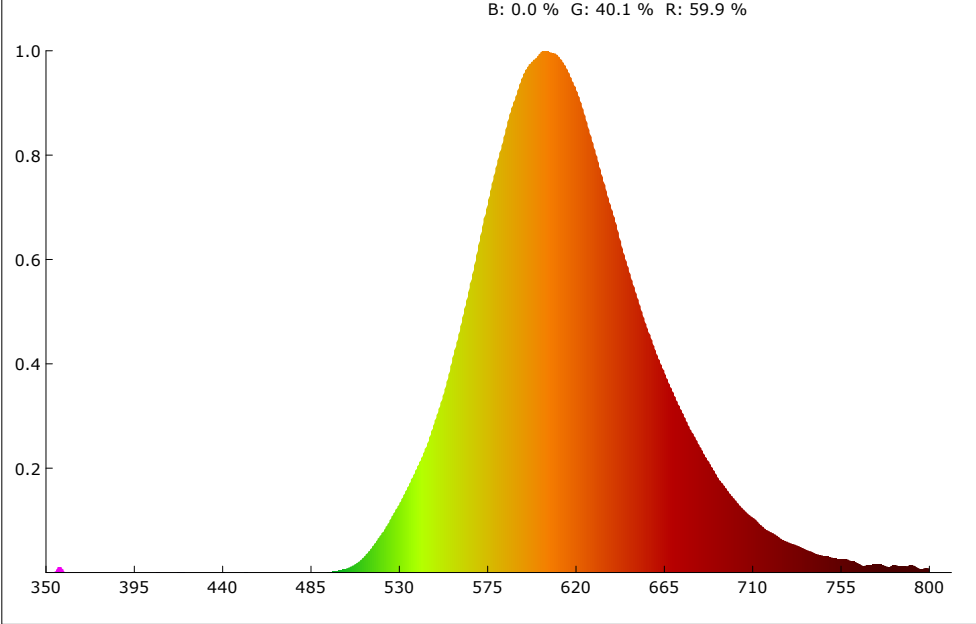

SDCM

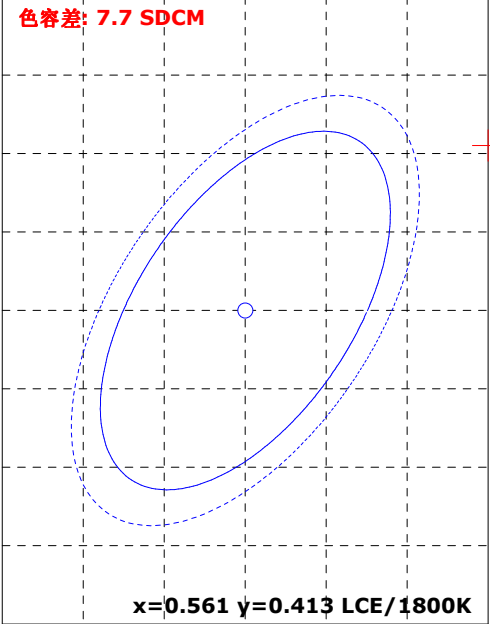

颜色参数:

坐标x: 0.5669 坐标y: 0.4305 坐标u: 0.3225 坐标v: 0.3673 坐标u': 0.3225 坐标v': 0.5509
红色比: 59.9 % 绿色比: 40.1 % 蓝色比: 0.0 % 光通量红色比: 31.5 % 光通量绿色比: 68.5 % 光通量蓝色比: 0.0 %

显色指数: 51.7 AvgR: 39.1
R1: 45.8 R2: 70.3 R3: 82.6 R4: 35.4 R5: 40.4 R6: 58.2 R7: 65.7 R8: 15.5
R9: -70.1 R10: 38.7 R11: 15.0 R12: 12.6 R13: 47.6 R14: 90.5 R15: 38.7


色温: 1802 K 光通量: 2390.320 lm 峰值波长: 607.7 nm 色容差: 7.7
明暗视觉比: 0.5 中心波长: 608.3 nm 主波长: 588.8 nm 质心波长: 615.3 nm
半宽度: 90.3 nm 色偏差: 0.00713 色纯度: 99.4 % 色质指数: 2.5
LER(TM-30): 332.9 辐射功率: 7180.9 mw 色域指数(Rg): 9.8 逼真度(Rf): 13.4
红光辐射功率: 4113.4 mw 近红辐射功率: 293.1 mw 远红辐射功率: 17.3 mw

电参数:





光效: 40.7 Lm/W 能效: 44.3 能效等级: G
电压: 220.5 V 电流: 0.434 A 功率: 58.740 W 功率因素: 0.613

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: 13.4 CCT: 1802K u': 0.3225
Rg: 9.8 LER: 332.9 Duv: 0.00713 v': 0.5509

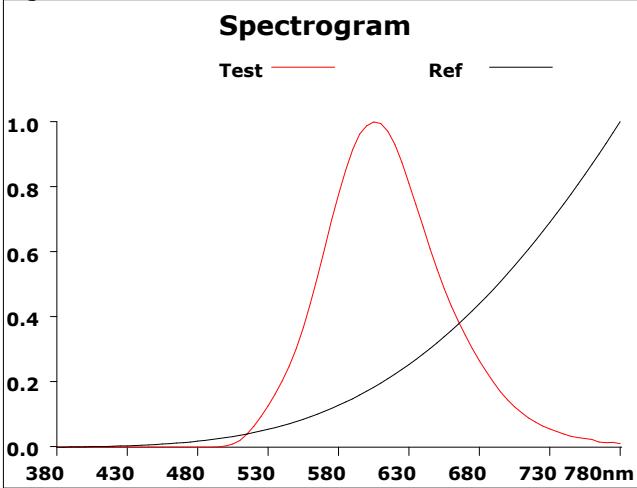

500			
Hue Bin	Rf	Chroma	Hue
1	36.3	-23.7%	-16.8%
2	6.9	-38.8%	-36.2%
3	0.0	-64.9%	-42.1%
4	2.0	-86.7%	-23.1%
5	14.2	-92.8%	8.7%
6	9.7	-66.0%	38.2%
7	10.8	-43.7%	35.1%
8	40.4	-33.4%	23.1%
9	41.1	-23.9%	-13.7%
10	10.9	-42.8%	-28.8%
11	1.9	-61.6%	-27.1%
12	0.8	-76.0%	1.2%
13	6.0	-81.0%	7.6%
14	22.0	-75.8%	22.5%
15	27.7	-39.7%	27.0%
16	47.5	-28.8%	8.5%

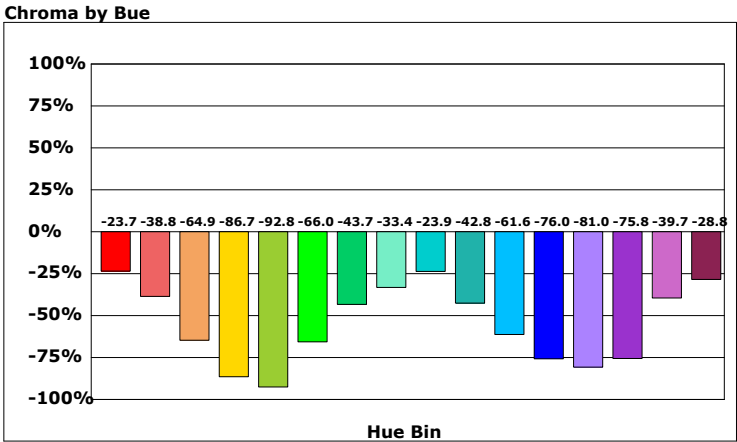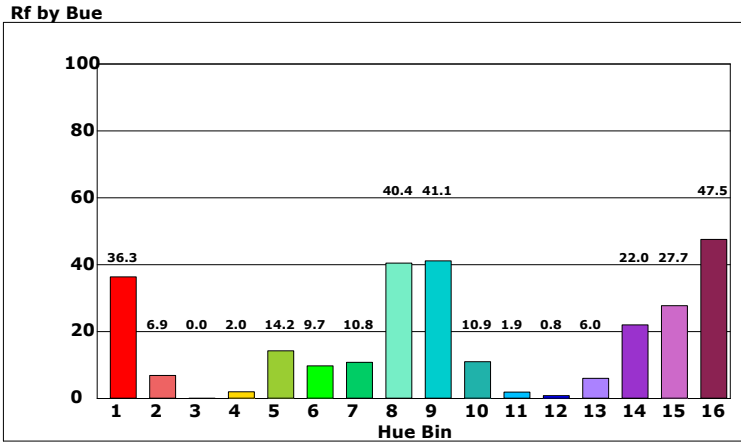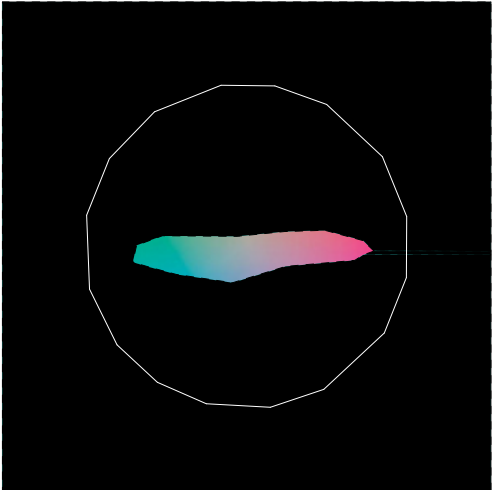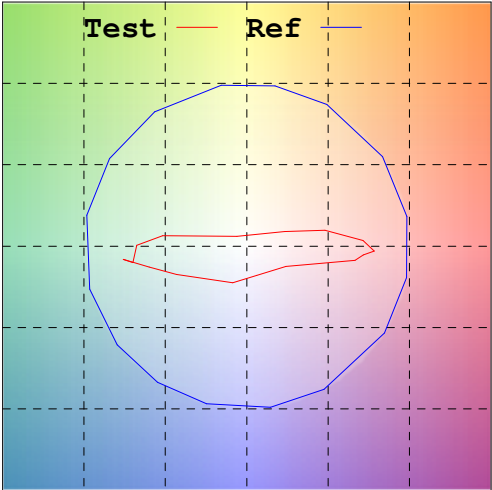

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/17/14

