



光谱图

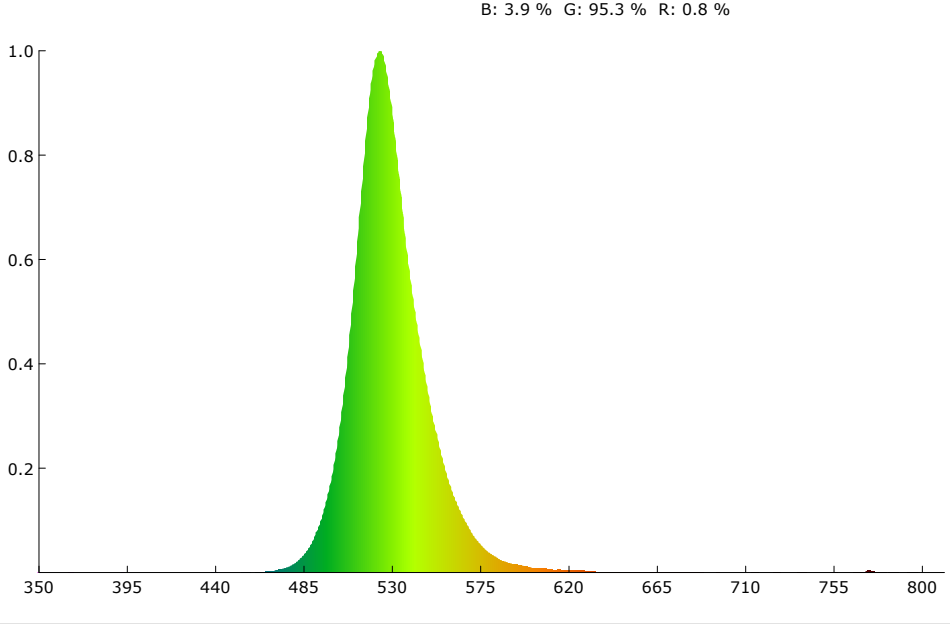

SDCM

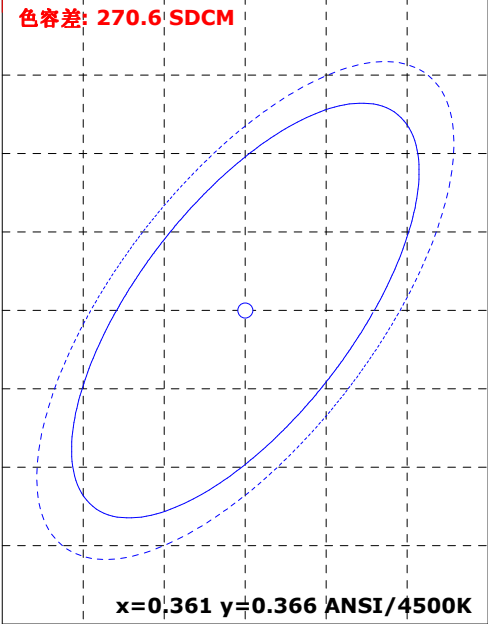

颜色参数:

坐标x: 0.1909 坐标y: 0.7325 坐标u: 0.0669 坐标v: 0.3852 坐标u': 0.0669 坐标v': 0.5778
红色比: 0.8 % 绿色比: 95.3 % 蓝色比: 3.9 % 光通量红色比: 0.3 % 光通量绿色比: 99.4 % 光通量蓝色比: 0.3 %

显色指数: -26.3 AvgR: -38.6
R1: -34.8 R2: -10.1 R3: -25.3 R4: -68.2 R5: -10.9 R6: -16.5 R7: -10.2 R8: -35.2
R9: -99.0 R10: -99.0 R11: -99.0 R12: -34.6 R13: -40.0 R14: 37.1 R15: -33.9


色温: 7461 K 光通量: 2610.654 lm 峰值波长: 524.5 nm 色容差: 270.6
明暗视觉比: 2.5 中心波长: 525.9 nm 主波长: 531.6 nm 质心波长: 529.9 nm
半宽度: 31.7 nm 色偏差: 0.15264 色纯度: 85.9 % 色质指数: 0.3
LER(TM-30): 520.6 辐射功率: 5015.0 mw 色域指数(Rg): 7.0 逼真度(Rf): 0.7
红光辐射功率: 40.2 mw 近红辐射功率: 7.9 mw 远红辐射功率: 2.9 mw

电参数:



光效: 45.2 Lm/W 能效: 49.2 能效等级: G
电压: 220.4 V 电流: 0.427 A 功率: 57.780 W 功率因素: 0.613

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:


Rf: 0.7 CCT: 7461K u': 0.0669
Rg: 7.0 LER: 520.6 Duv: 0.15264 v': 0.5778

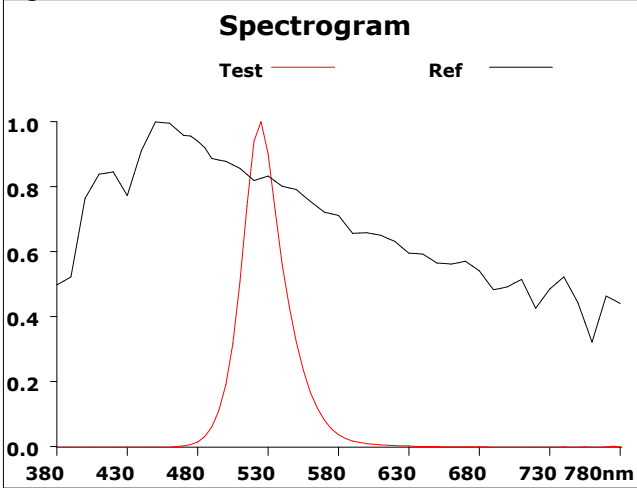

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-82.8%	2.6%
2	0.0	-70.4%	4.3%
3	0.2	-76.5%	-4.4%
4	1.7	-63.8%	-7.5%
5	0.6	-77.0%	0.3%
6	0.3	-85.8%	6.0%
7	0.2	-79.5%	17.9%
8	0.0	-78.9%	15.9%
9	7.4	-66.0%	32.4%
10	13.1	-50.9%	19.8%
11	1.9	-50.7%	2.7%
12	20.4	-49.4%	-19.3%
13	24.7	-57.2%	-24.0%
14	0.3	-69.6%	-30.6%
15	1.6	-81.0%	-31.6%
16	0.0	-80.0%	-10.6%

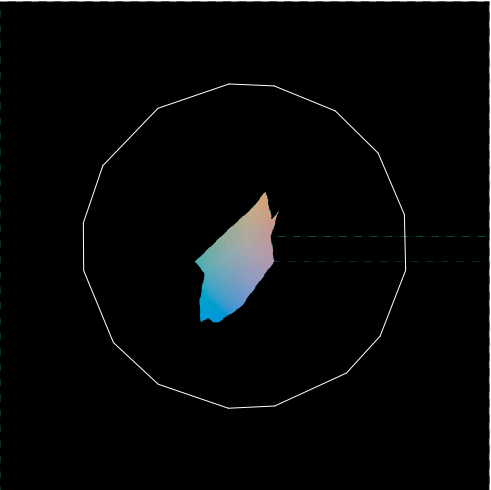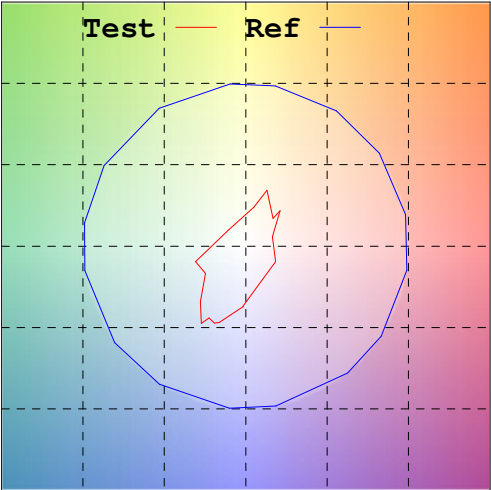

Rf by Bue

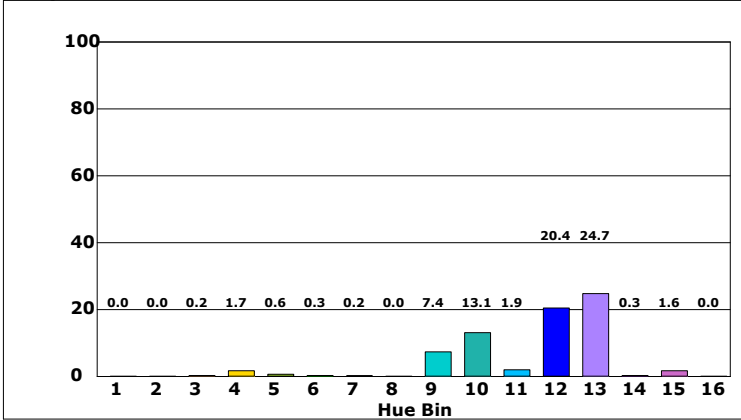

Chroma by Bue

