



光谱图

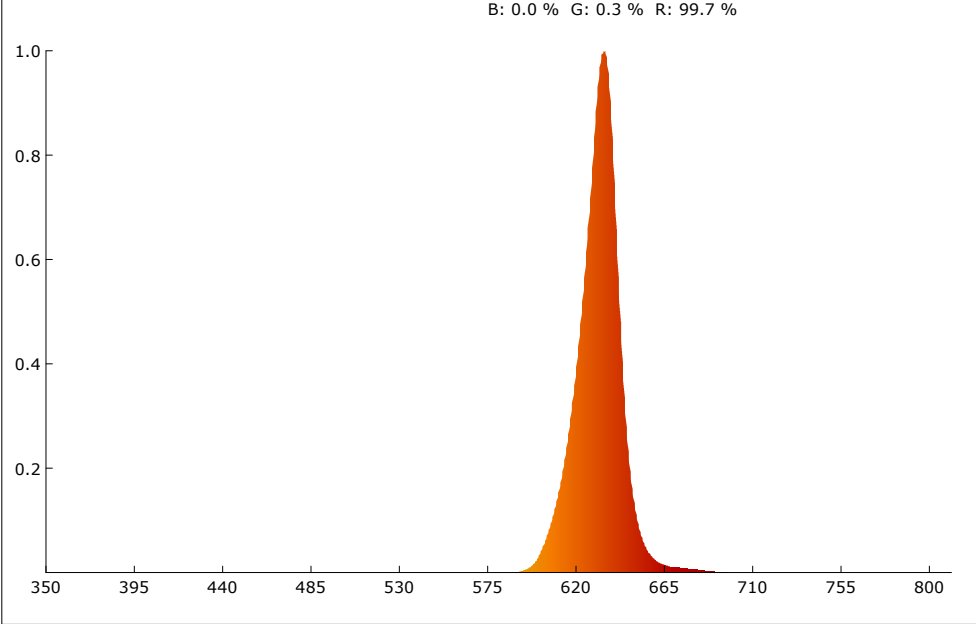

SDCM

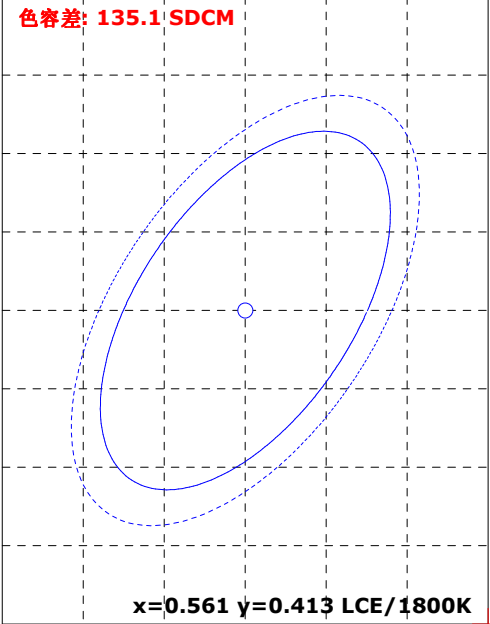

颜色参数:

坐标x: 0.7017 坐标y: 0.2982 坐标u: 0.5424 坐标v: 0.3457 坐标u': 0.5424 坐标v': 0.5185
红色比: 99.7 % 绿色比: 0.3 % 蓝色比: 0.0 % 光通量红色比: 99.0 % 光通量绿色比: 1.0 % 光通量蓝色比: 0.0 %

显色指数: 5.8 AvgR: 6.5
R1: -4.4 R2: 73.9 R3: 26.5 R4: -36.5 R5: -6.3 R6: 89.0 R7: -5.9 R8: -89.8
R9: -99.0 R10: 66.3 R11: -22.3 R12: 79.3 R13: 21.4 R14: 56.2 R15: -51.0


色温: 1000 K 光通量: 1541.600 lm 峰值波长: 634.5 nm 色容差: 135.1
明暗视觉比: 0.0 中心波长: 632.9 nm 主波长: 625.7 nm 质心波长: 632.2 nm
半宽度: 19.3 nm 色偏差: 0.00154 色纯度: 100.0 % 色质指数: -nan(ind)
LER(TM-30): 175.3 辐射功率: 8792.4 mw 色域指数(Rg): 0.0 逼真度(Rf): 2.8
红光辐射功率: 8765.8 mw 近红辐射功率: 0.7 mw 远红辐射功率: 0.0 mw

电参数:




光效: 26.0 Lm/W 能效: 28.3 能效等级: G
电压: 220.5 V 电流: 0.438 A 功率: 59.320 W 功率因素: 0.613

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:


Rf: 2.8 CCT: 1000K u': 0.5424
Rg: 0.0 LER: 175.3 Duv: 0.00154 v': 0.5185

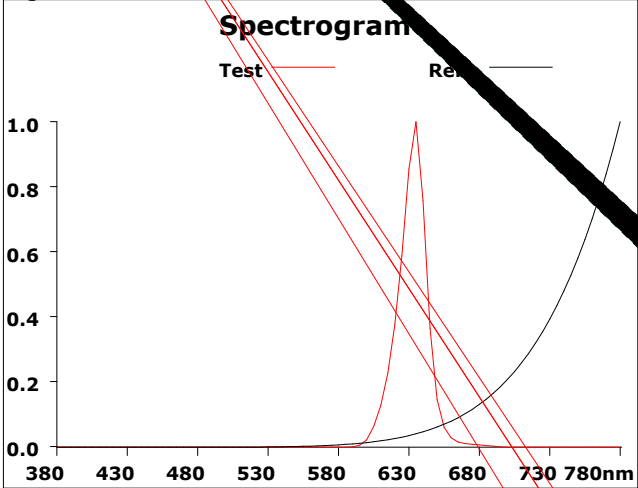


500			
Hue Bin	Rf	Chroma	Hue
1	1.6	-82.7%	5.5%
2	43.6	-89.8%	-6.5%
3	65.4	-101.8%	3.4%
4	100.0	nan%	-nan(ind)%
5	74.7	-92.3%	16.4%
6	100.0	nan%	-nan(ind)%
7	52.3	-51.7%	22.6%
8	0.4	-76.2%	-4.0%
9	0.0	-86.6%	1.3%
10	1.1	-102.4%	4.3%
11	38.6	-100.0%	7.5%
12	32.2	-99.0%	-77.6%
13	4.1	-114.8%	-25.9%
14	1.5	-97.0%	9.7%
15	48.5	71.8%	1.5%
16	1.0	-17.7%	-8.5%

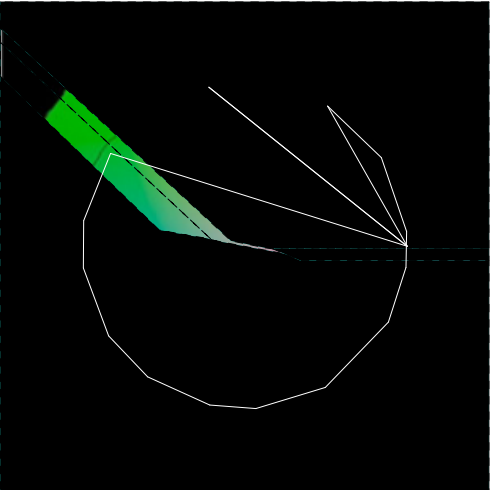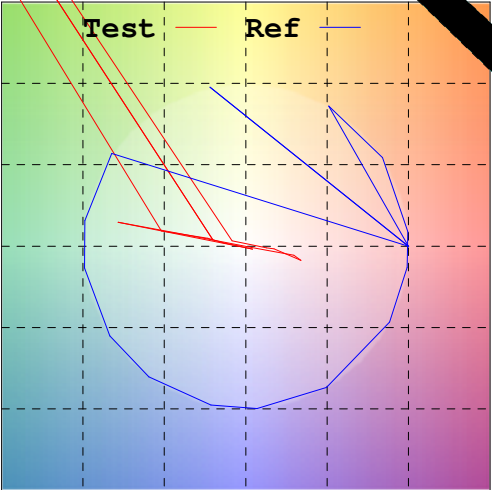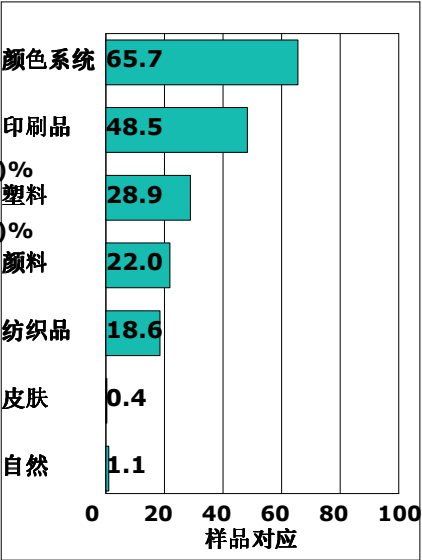

Rf by Bue

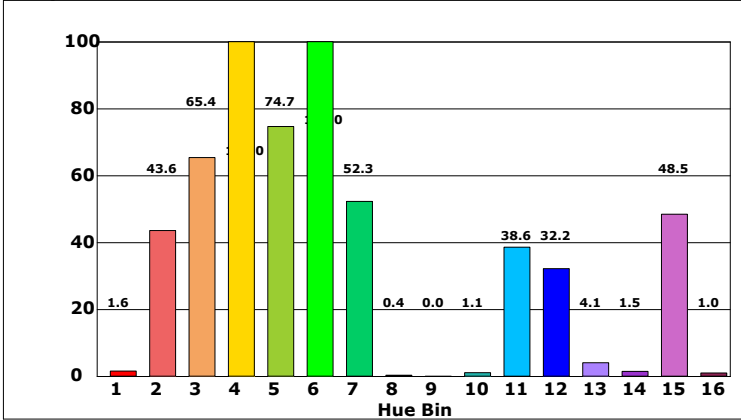

Chroma by Bue

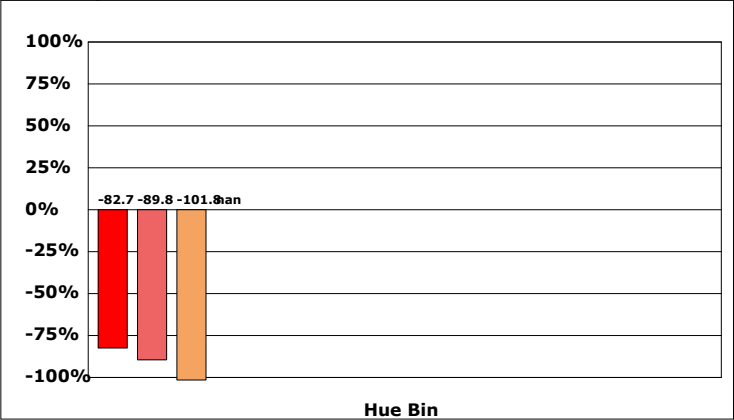

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173