



光谱图

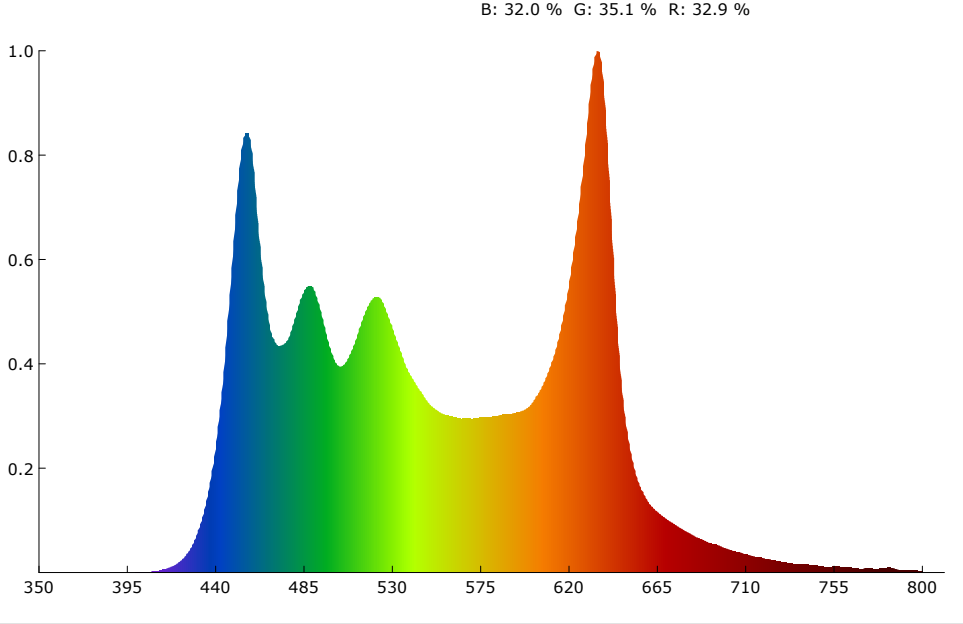

SDCM

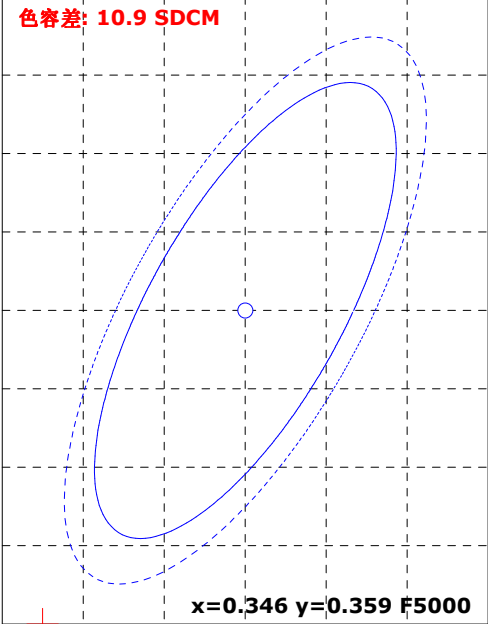

颜色参数:

坐标x: 0.3325 坐标y: 0.3273 坐标u: 0.2124 坐标v: 0.3136 坐标u': 0.2124 坐标v': 0.4704
红色比: 32.9 % 绿色比: 35.1 % 蓝色比: 32.0 % 光通量红色比: 21.5 % 光通量绿色比: 72.7 % 光通量蓝色比: 5.8 %

显色指数: 71.0 AvgR: 61.6
R1: 61.6 R2: 75.8 R3: 91.5 R4: 67.8 R5: 65.9 R6: 69.5 R7: 84.2 R8: 51.8
R9: -28.5 R10: 47.9 R11: 59.3 R12: 64.0 R13: 63.6 R14: 93.8 R15: 55.9


色温: 5487 K 光通量: 3128.130 lm 峰值波长: 635.5 nm 色容差: 10.9
明暗视觉比: 2.6 中心波长: 631.3 nm 主波长: 0.0 nm 质心波长: 552.1 nm
半宽度: 26.1 nm 色偏差: -0.00730 色纯度: 0.0 % 色质指数: 86.7
LER(TM-30): 268.1 辐射功率: 11667.0 mw 色域指数(Rg): 105.8 逼真度(Rf): 77.3
红光辐射功率: 3777.8 mw 近红辐射功率: 171.0 mw 远红辐射功率: 15.0 mw

电参数:





光效: 10.8 Lm/W 能效: 11.8 能效等级: G
电压: 218.6 V 电流: 1.840 A 功率: 289.000 W 功率因素: 0.718

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/19/14
备注:


Rf: 77.3 CCT: 5487K u': 0.2124
Rg: 105.8 LER: 268.1 Duv: -0.00730 v': 0.4704

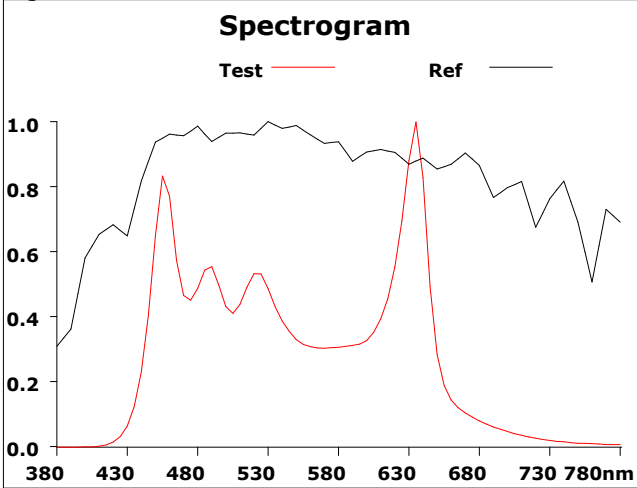

500			
Hue Bin	Rf	Chroma	Hue
1	69.4	13.6%	3.3%
2	75.6	12.1%	-6.7%
3	67.1	6.4%	-15.8%
4	71.1	-5.1%	-15.6%
5	77.1	-12.0%	-7.6%
6	88.1	-3.6%	5.2%
7	80.5	2.4%	11.1%
8	74.3	8.8%	10.7%
9	81.4	13.2%	6.0%
10	81.1	9.3%	-3.9%
11	79.4	7.3%	-7.9%
12	80.2	-0.3%	-12.1%
13	84.9	-4.0%	-4.8%
14	80.7	-4.2%	8.6%
15	75.5	9.9%	9.9%
16	76.6	7.7%	9.5%

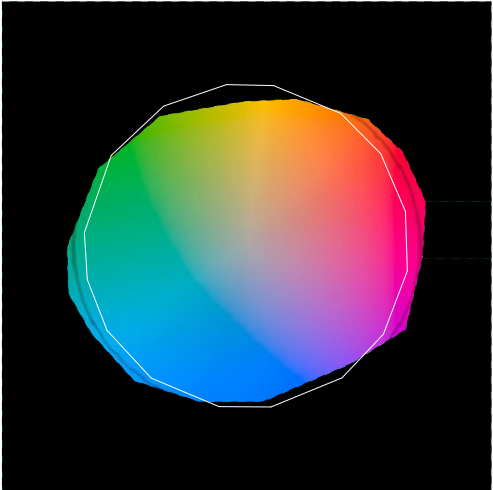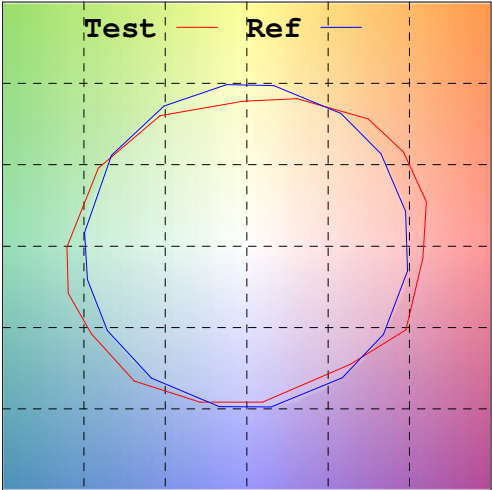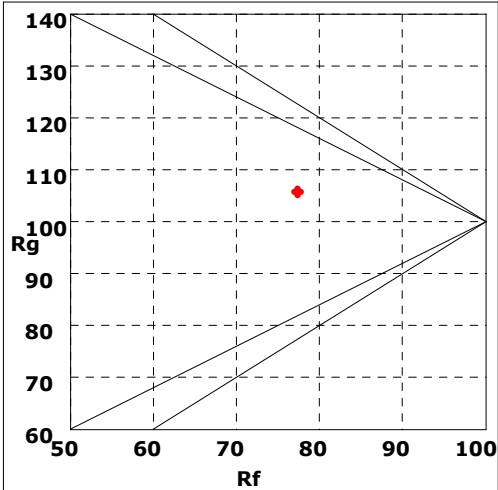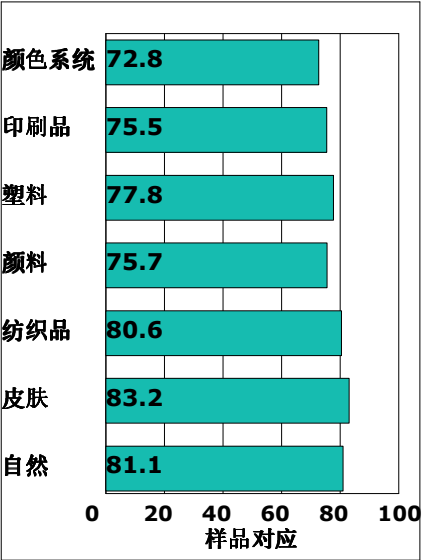

Rf by Bue

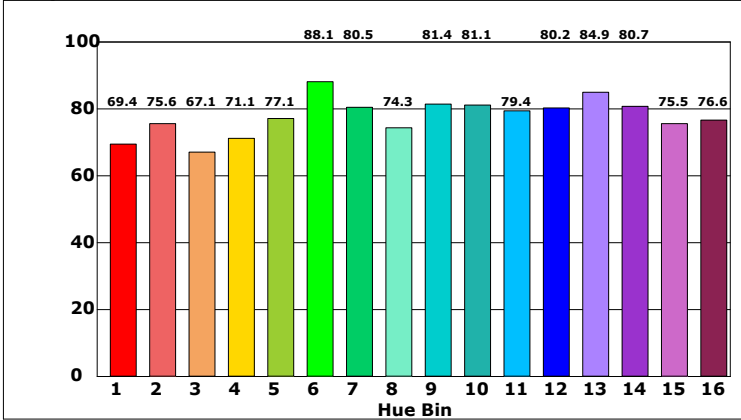

Chroma by Bue

