



光谱图

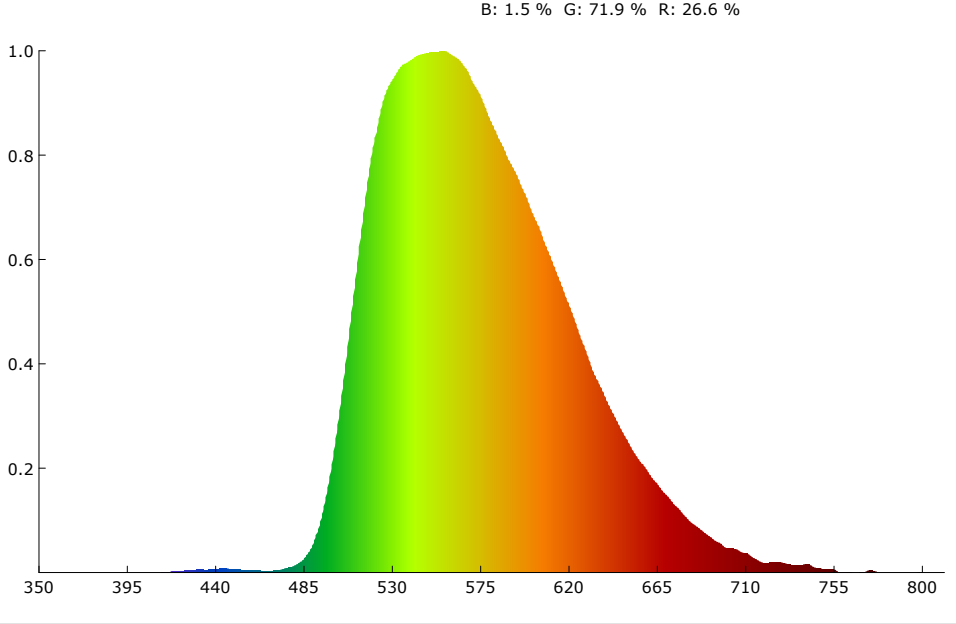

SDCM

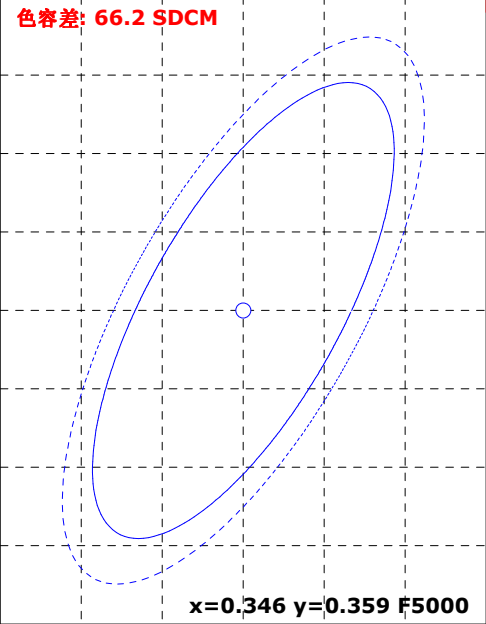

颜色参数:

坐标x: 0.4248 坐标y: 0.5507 坐标u: 0.1940 坐标v: 0.3772 坐标u': 0.1940 坐标v': 0.5658
红色比: 26.6 % 绿色比: 71.9 % 蓝色比: 1.5 % 光通量红色比: 11.3 % 光通量绿色比: 88.6 % 光通量蓝色比: 0.1 %

显色指数: 34.8 AvgR: 20.5
R1: 42.6 R2: 47.0 R3: 38.8 R4: 10.0 R5: 41.2 R6: 40.4 R7: 38.7 R8: 19.9
R9: -99.0 R10: -8.1 R11: -13.3 R12: 11.2 R13: 41.9 R14: 70.1 R15: 26.8


色温: 4049 K 光通量: 1197.234 lm 峰值波长: 556.5 nm 色容差: 66.2
明暗视觉比: 1.2 中心波长: 565.4 nm 主波长: 568.2 nm 质心波长: 574.3 nm
半宽度: 111.1 nm 色偏差: 0.05290 色纯度: 93.0 % 色质指数: 18.7
LER(TM-30): 472.7 辐射功率: 2533.0 mw 色域指数(Rg): 32.0 逼真度(Rf): 25.7
红光辐射功率: 665.8 mw 近红辐射功率: 27.2 mw 远红辐射功率: 0.2 mw

电参数:

光效: 20.0 Lm/W 能效: 21.8 能效等级: G
电压: 219.5 V 电流: 0.444 A 功率: 59.740 W 功率因素: 0.613

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/19/14
备注:

Rf: 25.7 CCT: 4049K u': 0.1940
Rg: 32.0 LER: 472.7 Duv: 0.05290 v': 0.5658

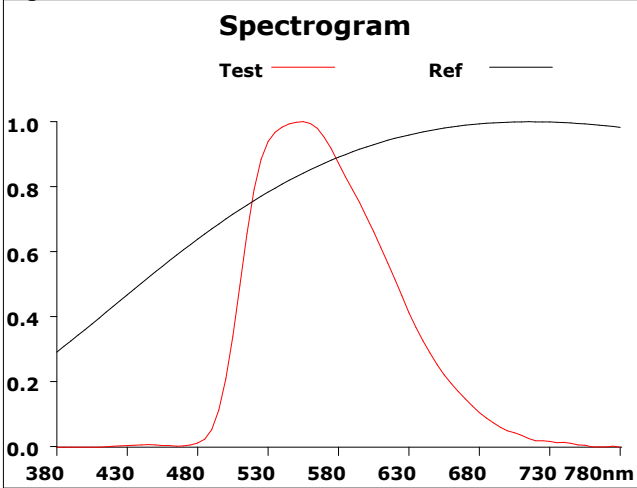

500			
Hue Bin	Rf	Chroma	Hue
1	45.0	-26.1%	1.3%
2	43.4	-24.1%	-14.9%
3	9.1	-41.0%	-23.2%
4	7.7	-55.4%	-16.5%
5	5.5	-70.3%	4.0%
6	2.0	-66.9%	31.5%
7	2.0	-52.4%	47.3%
8	17.8	-31.4%	34.8%
9	46.2	-20.6%	29.9%
10	48.7	-20.8%	19.4%
11	55.9	-24.6%	-1.9%
12	28.1	-35.7%	-6.8%
13	31.6	-47.6%	-3.0%
14	40.1	-39.1%	11.0%
15	30.0	-40.9%	17.0%
16	42.5	-28.4%	13.7%

