



光谱图

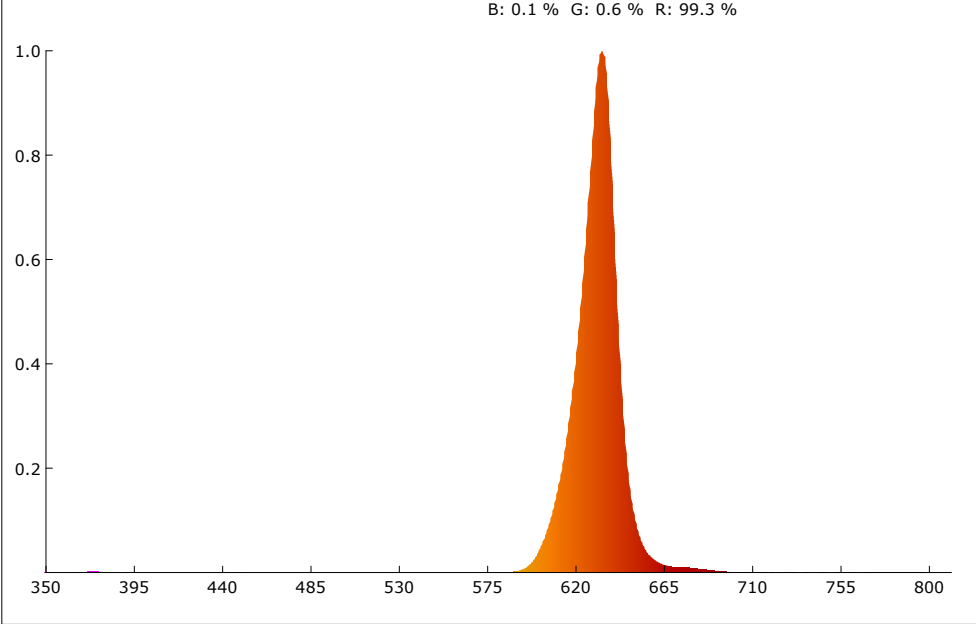

SDCM

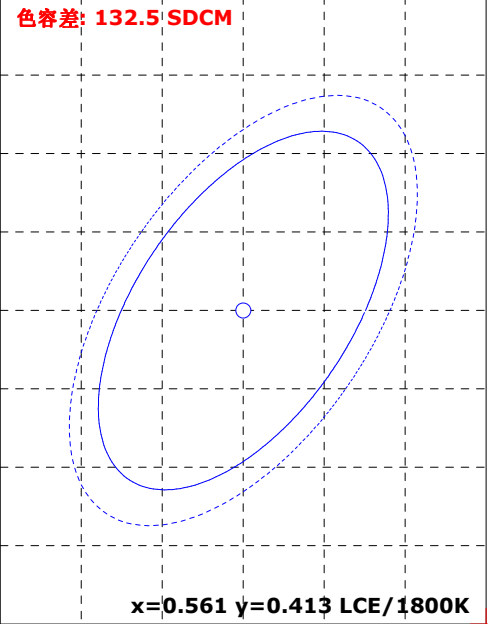

颜色参数:

坐标x: 0.6986 坐标y: 0.2998 坐标u: 0.5373 坐标v: 0.3459 坐标u': 0.5373 坐标v': 0.5188
红色比: 99.3 % 绿色比: 0.6 % 蓝色比: 0.1 % 光通量红色比: 98.1 % 光通量绿色比: 1.9 % 光通量蓝色比: 0.0 %

显色指数: 10.8 AvgR: 10.8
R1: 0.5 R2: 75.9 R3: 29.1 R4: -28.3 R5: 1.3 R6: 92.9 R7: -2.8 R8: -81.9
R9: -99.0 R10: 69.8 R11: -12.6 R12: 78.4 R13: 25.4 R14: 58.3 R15: -44.4


色温: 1000 K 光通量: 445.973 lm 峰值波长: 633.5 nm 色容差: 132.5
明暗视觉比: 0.0 中心波长: 632.1 nm 主波长: 624.8 nm 质心波长: 631.2 nm
半宽度: 18.9 nm 色偏差: -0.00730 色纯度: 99.5 % 色质指数: -nan(ind)
LER(TM-30): 180.3 辐射功率: 2473.0 mw 色域指数(Rg): 38.0 逼真度(Rf): 5.8
红光辐射功率: 2440.6 mw 近红辐射功率: 8.4 mw 远红辐射功率: 2.7 mw

电参数:






光效: 7.3 Lm/W 能效: 8.0 能效等级: G
电压: 219.6 V 电流: 0.451 A 功率: 61.050 W 功率因素: 0.616

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/19/14
备注:

Rf: 5.8 CCT: 1000K u': 0.5373
Rg: 38.0 LER: 180.3 Duv: -0.0000 v': 0.5188

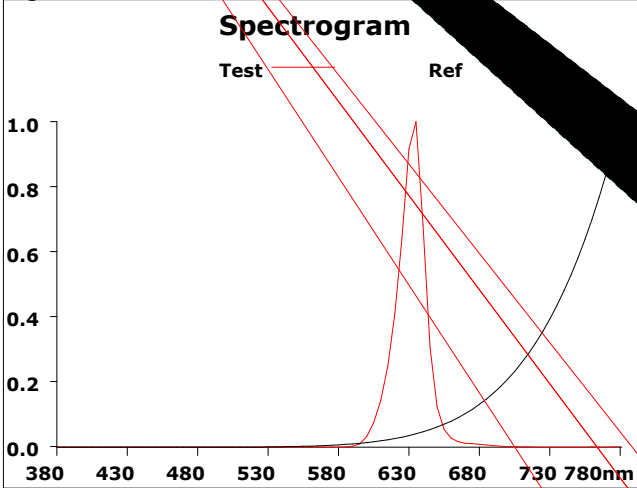

500			
Hue Bin	Rf	Chroma	Hue
1	1.1	-80.2%	32.4%
2	46.2	-55.7%	66.2%
3	68.9	-1.8%	84.6%
4	100.0	nan%	-nan(ind)%
5	97.6	8.6%	1.4%
6	100.0	nan%	-nan(ind)%
7	66.1	-25.8%	-16.1%
8	1.3	-66.1%	-17.7%
9	0.3	-70.4%	25.8%
10	9.1	-63.8%	47.7%
11	60.8	-5.5%	54.5%
12	65.9	-58.8%	-58.8%
13	51.3	-44.2%	-44.2%
14	50.0	-5.5%	-5.5%
15	57.4	-5.5%	-5.5%
16	1.2	-65.0%	-65.0%

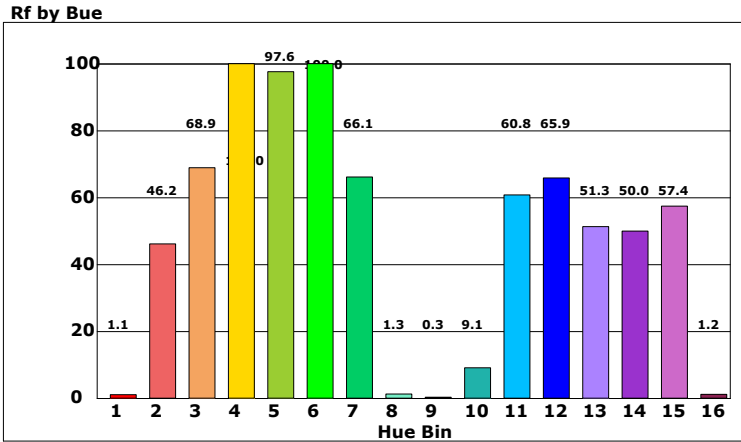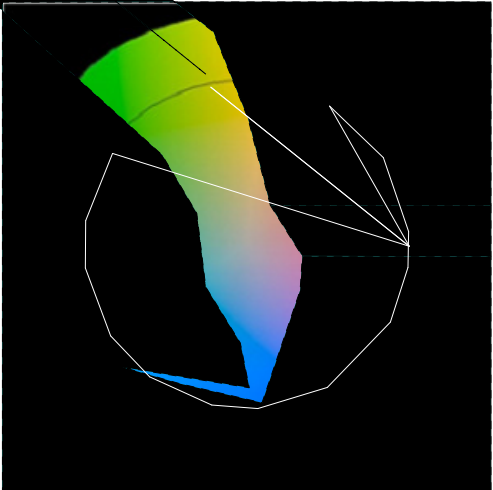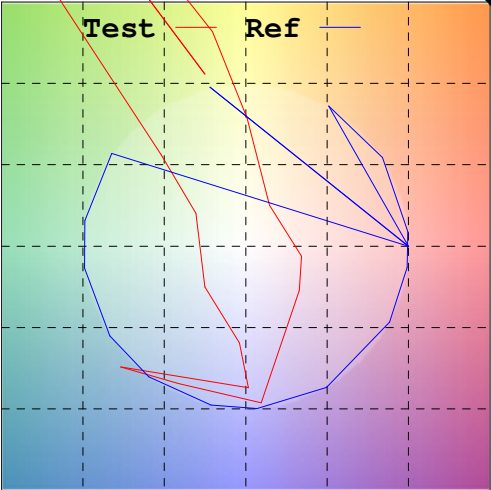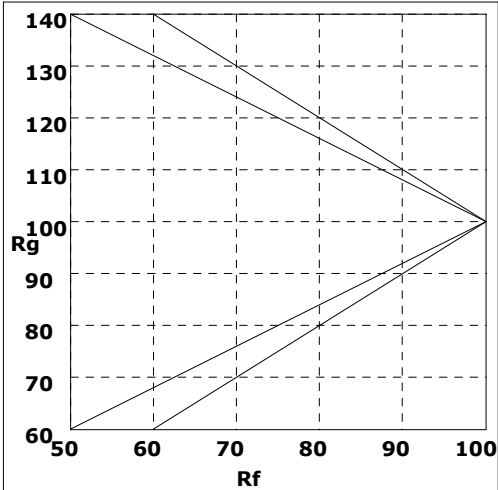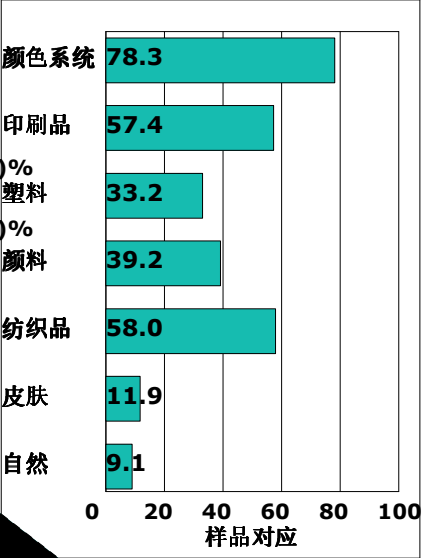

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173