
BROADCOM®

Data Sheet

AEDR-9830A

Three-Channel Reflective Incremental Encoders with Analog and Digital Output (318 LPI)



Description

The Broadcom® AEDR-9830A is a three-channel reflective optical encoder. It can be configured to analog or digital outputs using Reflective Technology for motion control purposes. The selectable options available are two channels differential analog with a third channel differential digital or analog index output or three-channel digital differential A, B, and I output.

The AEDR-9830A in analog encoder modes offers two channels differential analog outputs (Sin, /Sin, Cos, /Cos), which can be interfaced directly with external interpolators that are available.

The AEDR-9830A in digital encoder mode offers two-channel (AB) quadrature digital outputs and a third channel digital index outputs. Being TTL compatible, the outputs of the AEDR-9830A encoder can be interfaced with most of the signal processing circuitries. Therefore, the encoder provides easy integration into, and flexible design for, existing systems.

The AEDR-9830A encoder is designed to operate over a –40°C to 125°C temperature range and is suitable for commercial, industrial, and automotive end applications.

The encoder houses an infrared LED light source and photo-detecting circuitry in a single package. The small size of 4.00 mm (L) × 4.00 mm (W) × 1.05 mm (H), allows it to be used in a wide range of miniature commercial applications where size and space are primary concerns.

Features

- Analog Output option – Two channels differential analog output and, differential digital or analog index output
- Digital Output option – Three channels differential or TTL compatible; two channel quadrature (AB) digital outputs for direction sensing and a third channel, index digital output
- Built-in interpolator for 1x, 2x, 4x, 8x, and 16x interpolation
- Surface mount leadless package – 4.0 mm (L) × 4.0 mm (W) × 1.05 mm (H)
- Operating voltage of 3.3V and 5.0V supply
- Built-in LED current regulation
- Wide operating temperature range from –40°C to 125°C.
- High encoding resolution: 318 LPI (lines/inch) or 12.52 LPmm (lines/mm)
- Qualified automotive standard AEC-Q100 Grade 1


Applications

- Closed-loop stepper motors
- Small motors, actuators
- Industrial printers
- Robotics
- Light detection and ranging (LiDAR)
- Pan-tilt-zoom camera
- Automated guided vehicles (AGVs)
- Optometric equipment
- Linear stages


Disclaimer: Except as expressly indicated in writing, the component is not designed or warranted to be suitable for use in safely-related applications where its failure or malfunction can reasonably be expected to result in injury, death, or severe equipment damage.

Output Waveform

Analog Output Option

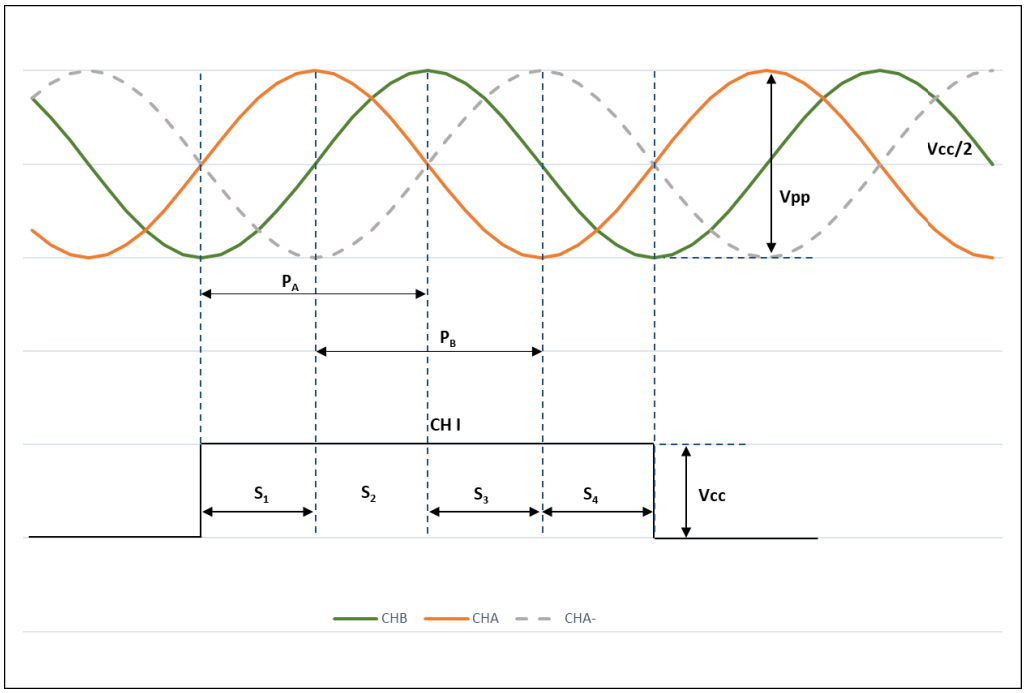


Code Wheel Rotation Movement (Anti-Clockwise)

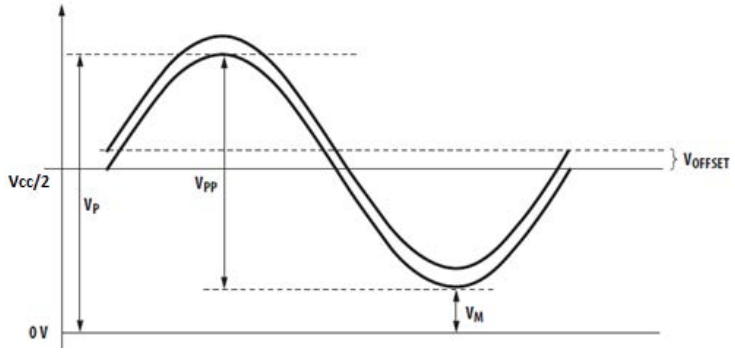


Analog Parameter Definitions

Analog Peak-to-Peak	Vpp	The peak-to-peak signal magnitude in V of the analog signal
Analog Offset	V_{OFFSET}	The offset in mV from the mid-point of the analog peak-to-peak signal to the zero voltage point
Analog Peak/Valley Voltage	V_{PA}, V_{PB} V_{MA}, V_{MB}	The value in V of the peak/valley of the analog signal (that is, one-sided reading)
Analog Peak to Peak Voltage	V_{PPA}, V_{PPB}	The absolute difference between V_P and V_M of channel A or B

Digital Output Option

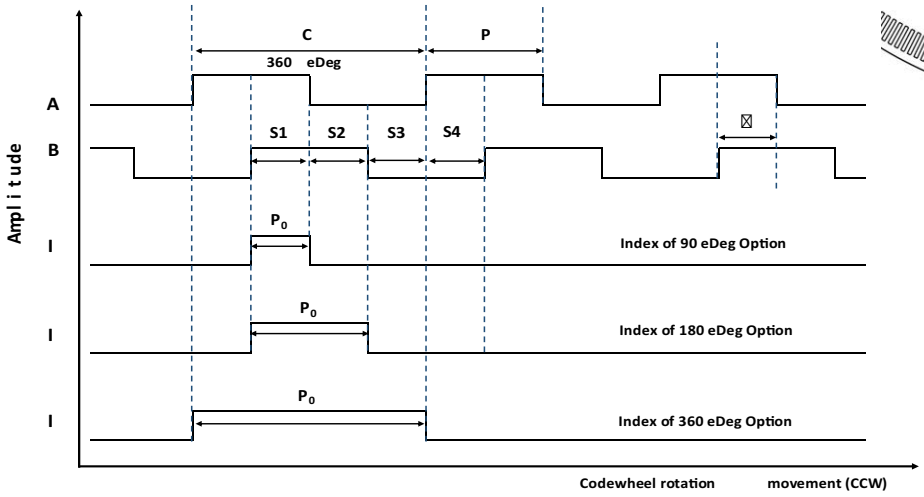

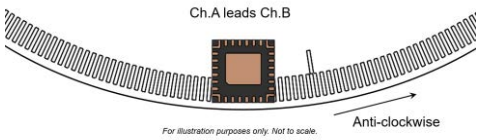

Quadrature Signals A, B, and I

Digital Parameter Definitions

Count	N	The number of bar and window pairs or counts per revolution (CPR) of the code wheel.
Cycle	C	360 electrical degrees (°e), 1 bar and window pair. One shaft rotation: 360 mechanical degrees, N cycles.
Cycle Error	ΔC	An indication of cycle uniformity. The difference between an observed shaft angle that gives rise to one electrical cycle, and the nominal angular increment of 1/N of a revolution.
Pulse Width (Duty) Error	ΔP	The deviation, in electrical degrees, of the pulse width from its ideal value of 180°e.
State	S	The number of electrical degrees between a transition in the output of channel A and the neighboring transition in the output of channel B. There are four states per cycle, each nominally 90°e.
Phase	φ	The number of electrical degrees between the center of the high state of channel A and the center of the high state of channel B. This value is nominally 90°e for quadrature output.
Optical Radius	ROP	The distance from the code wheel's center of rotation to the optical center (O.C.) of the encoder module.
Index Pulse Width	P_0	The number of electrical degrees that an index is high in one cycle.

Absolute Maximum Ratings

Description and Symbol	Units
Storage Temperature, T_S	–40°C to 150°C
Operating Temperature, T_A	–40°C to 125°C
Supply Voltage, V_{CC}	7V
ESD Human Body Model	4000V
ESD Charge Device Model	1000V

NOTE:

1. Proper operation of the encoder cannot be guaranteed if the maximum ratings are exceeded.
2. Caution: Take antistatic discharge precautions when handling the encoder to avoid damage, degradation, or both induced by ESD.
3. Remove Kapton tape only after SMT reflow process and just before final assembly. Take precautions to keep the encoder ASIC clean at all times.
4. Some particles may be present on the surface of the encoder ASIC surface. The presence of these particles do not degrade the performance of the encoder.


Recommended Operating Condition

Parameter	Symbol	Min.	Typ.	Max.	Units	Notes
Operating Temperature	T_A	–40	25	125	°C	
Supply Voltage	V_{CC}	2.97	3.3	3.63	V	Ripple < 100 mVp-p
		4.5	5	5.5		
Current	Icc	—	30	65	mA	
Pin Current (All I/O Outputs)	I	–20	—	20	mA	
Maximum Output Frequency	F	—	—	200	kHz	At 1x interpolation
		—	—	400	kHz	At 2x interpolation
		—	—	800	kHz	At 4x interpolation
		—	—	1.6	MHz	At 8x interpolation
		—	—	2	MHz	At 16x interpolation
Radial Misalignment	ER	—	—	± 0.2	mm	
Tangential Misalignment	ET	—	—	± 0.2	mm	
Tilt Misalignment	Eθ	—	—	± 2.0	deg	
Code Wheel Gap	G	0.5	1.00	1.5	mm	

Power-Up Behavior

When the AEDR-9830A is powered on, the A, B, and I digital outputs are invalid until after the initial first state of either Ch A or Ch B signal.

Encoder Pinout

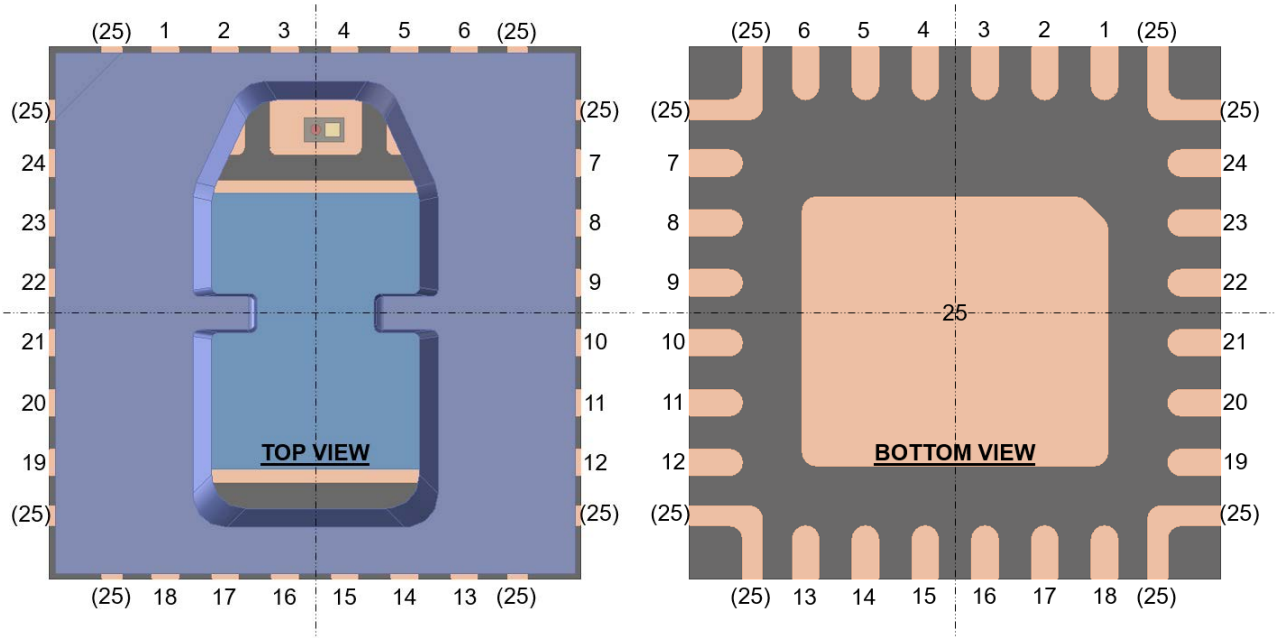

Pin	Name	Function
1	CH_A / A+	Digital A+ / Analog Sin+
2	N.C.[a]	—
3	LED ANODE	LED Anode
4	LED ANODE	LED Anode
5	LED CATHODE	LED Cathode
6	LED REG	LED Regulation
7	VDDA / VCC	Analog Supply Voltage
8	VSSA / AGND	Analog Ground
9	SEL2	Mode Selection 2
10	SEL1	Mode Selection 1
11	INDEX_N / I-	Index Output Z- (Digital/Analog)
12	INDEX_P / I+	Index Output Z+ (Digital/Analog)
13	N.C.	—

Pin	Name	Function
14	N.C.	—
15	N.C.	—
16	N.C.	—
17	N.C.	—
18	N.C.	—
19	INDEX_SEL	Index control
20	CH_BB / B-	Digital B- / Analog Cos-
21	CH_B / B+	Digital B+ / Analog Cos+
22	VSSD / DGND	Digital Ground
23	VDD	Digital Supply Voltage
24	CH_AB / A-	Digital A- / Analog Sin-
25	VSSA	Analog Ground
(25)	N.C.	—

a. N.C. - No connect.


NOTE:

1. No connection to all corner pads indicated as (25).
2. Connect pin 8, pin 22, and pin 25 to common ground for all digital or analog mode applications. Pin 25 is the center pad of the package.
3. Both pin 7 and pin 23 need to be powered during operation.
4. Both pin 5 and pin 6 need to be connected together.

Select Options – Encoder Built-In Interpolation

SEL 1	SEL 2	IND SEL	Interpolation Factor	Index	Maximum Output Frequency	CPR at ROP 7.95 mm	CPR at ROP 11 mm
Open	Open	Low	1X	Gated 90 deg	200 kHz	625	865
		High		Gated 180 deg			
		Open		Ungated raw			
Open	Low	Low	2X	Gated 90 deg	400 kHz	1250	1730
		High		Gated 180 deg			
		Open		Gated 360 deg			
High	High	Low	4X	Gated 90 deg	800 kHz	2500	3460
		High		Gated 180 deg			
		Open		Gated 360 deg			
Low	Low	Low	8X	Gated 90 deg	1.6 MHz	5000	6920
		High		Gated 180 deg			
		Open		Gated 360 deg			
High	Low	Low	16X	Gated 90 deg	2.0 MHz	10,000	13,840
		High		Gated 180 deg			
		Open		Gated 360 deg			
Open	High	N/A	Analog (500mVpp)	Analog	200 kHz	N/A	N/A
Low	High	N/A	Analog 1Vpp	Ungated Digital			
High / Low	Open	N/A	Analog 1Vpp	Analog			

NOTE: Open selection must be connected to middle of a voltage divider circuit.



NOTE: Recommended to use 2 × 4.7-kΩ resistors (Vcc-GND).

The digital interpolation factor above may be used with the following equations to cater to various rotational speed (RPM) and count per revolution (CPR).

RPM = (Count Frequency × 60) / CPR

The CPR (at 1X interpolation) is based on the following equation, which is dependent on radius of operation (ROP).


CPR = LPI × 2π × ROP (inch) or CPR = LP mm × 2π × ROP (mm)

NOTE: LPmm (lines per mm) = LPI / 25.4.

Recommended Setup for the Power Supply Pins and General Routing

Both VDDA, VDD, and the respective grounds (VSSA and VSSD) are to be connected as shown in the following figure. The following are the recommended schematic design rules to follow:

- Use a pair of 22-µF and 0.1-µF capacitors as bypass on VDD and VDDA. Place them in parallel as close as possible to the encoder ASIC package, in between the power and ground pins.
- Avoid routing the INDEX trace in parallel and close to the analog signals to reduce the INDEX signal switching noise from coupling into the analog signal.
- Design separate VDD and VDDA traces.
- Minimize trace or cable length where possible.
- For a single-ended application, do not ground the Output- from the encoder. Allow the output to float.

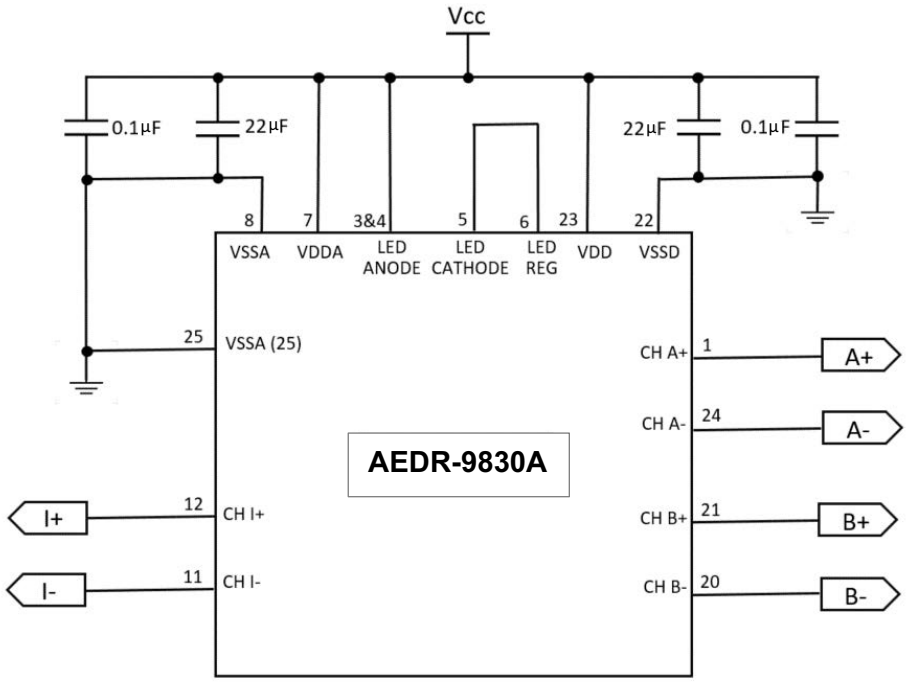

NOTE:

1. Pin 25 is the center pad of the package and is designated as AGND.
2. Refer to the preceding table for SEL1X, SEL2X, and IND SEL configurations.

Analog Signals Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Peak to Peak Voltage (Average)	V_{PPA}, V_{PPB}	0.9	1	1.1	V
		0.45	0.50	0.55	V
Analog Offset Voltage	$V_{OFFSETA}$, $V_{OFFSETB}$	0.45 Vcc	0.5 Vcc	0.55 Vcc	V
Voltage Reference (Midpoint of signal Vpp)	Vref	—	Vcc / 2	—	V

NOTE:

1. Typical values represent the average value of encoder performance in our factory-based setup conditions.
2. The optimal performance of the encoder depending on the motor/system setup condition of the individual customer.

Digital Signals Characteristics (Code Wheel of Rop at 7.95 mm)

Parameter	Symbol	Dynamic Performance					Units
		Typical					
Interpolation Factor		**1X**	**2X**	**4X**	**8X**	**16X**	
Cycle Error	ΔC	± 7	± 12	± 21	± 28	± 35	°e
Pulse Width (Duty) Error	ΔP	± 6	± 13	± 14	± 18	± 25	°e
Phase Error	Δϕ	± 3	± 7	± 7	± 9	± 9	°e
State Error	ΔS	± 6	± 8	± 11	± 12	± 14	°e
Index Pulse Width (Gated 90°)	Po	90	90	90	90	90	°e
Index Pulse Width (Gated 180°)	Po	180	180	180	180	180	°e
Index Pulse Width (Gated 360°)	Po	N/A	360	360	360	360	°e
Index Pulse Width (Raw Ungated)	Po	330	N/A	N/A	N/A	N/A	°e

NOTE:

1. Typical values represent the average value of encoder performance based on factory setup conditions at 12k RPM with the metal code wheel.
2. The optimal performance of the encoder depending on the motor/system setup and code wheel type and condition.

Electrical Characteristics

Characteristics over recommended operating conditions at 25°C.

Parameter	Symbol	Min.	Typ.	Max.	Units	Notes
High Level Output Voltage	VOH	2.4	—	—	V	IOH = –20 mA
Low Level Output Voltage	VOL	—	—	0.4	V	IOH = +20 mA
Output current per channel, Iout	Io	—	—	20	mA	
Rise Time[a]	tr	—	< 50	—	ns	CL ≤ 50 pF
Fall Time[a]	tf	—	< 50	—	ns	

a. Applicable for all digital modes except Index in Analog mode

Code Wheel Design Guideline

The window tracks are reflective surfaces, and the bar tracks are opaque surfaces; all window and bar tracks are trapezoid.
The number of Incremental window/bar tracks depend on the CPR; and the Incremental windows/bars have the same width value.
There is an offset between the Incremental window tracks and the Index window track.
There is only one Index window track, and its width is constant.
The center point to form the Incremental Optical Radius (R_{op}) and the Index R_{op} are two different points, except for 625 CPR.

Figure 1: Code Wheel Design (A)


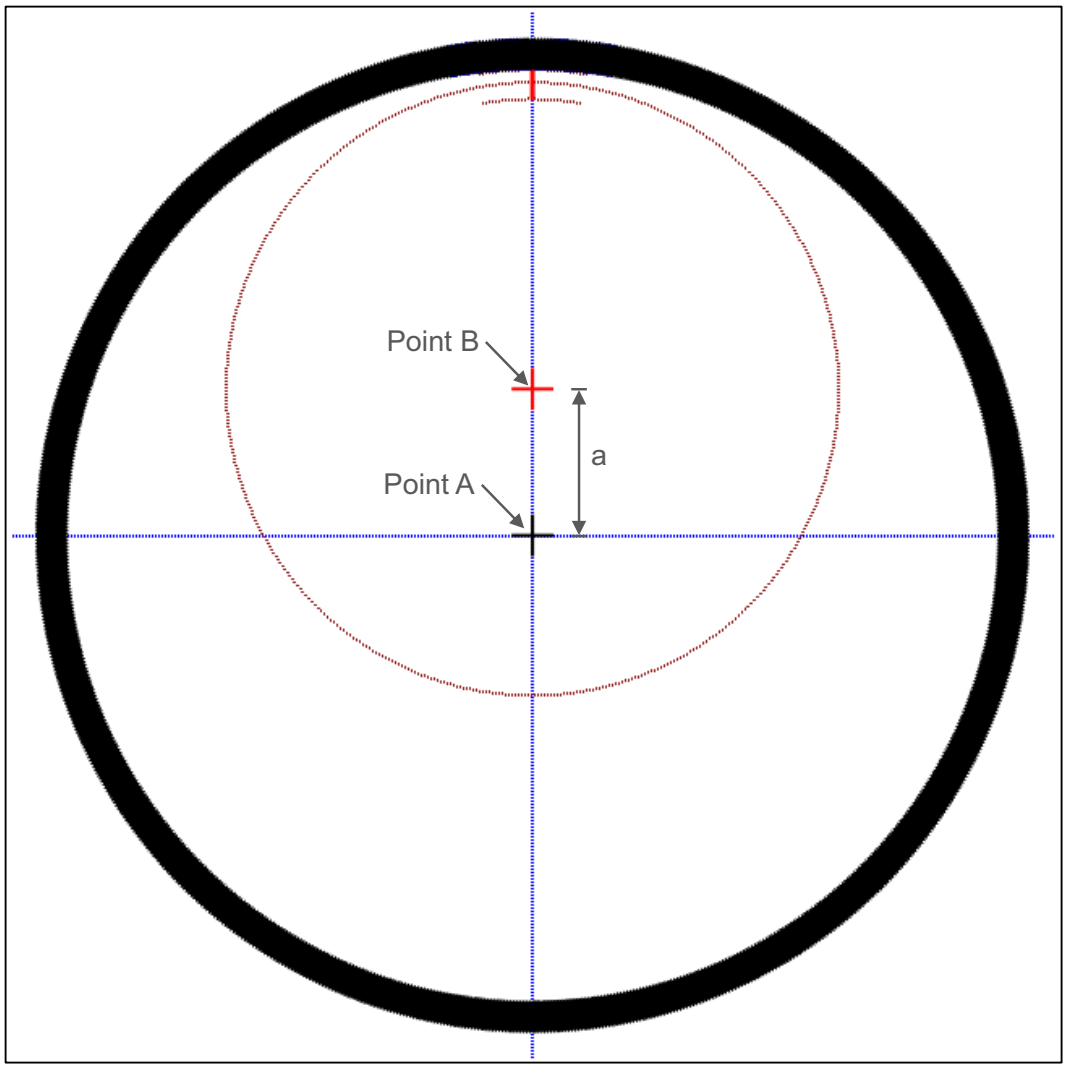


Figure 2: Code Wheel Design (B)

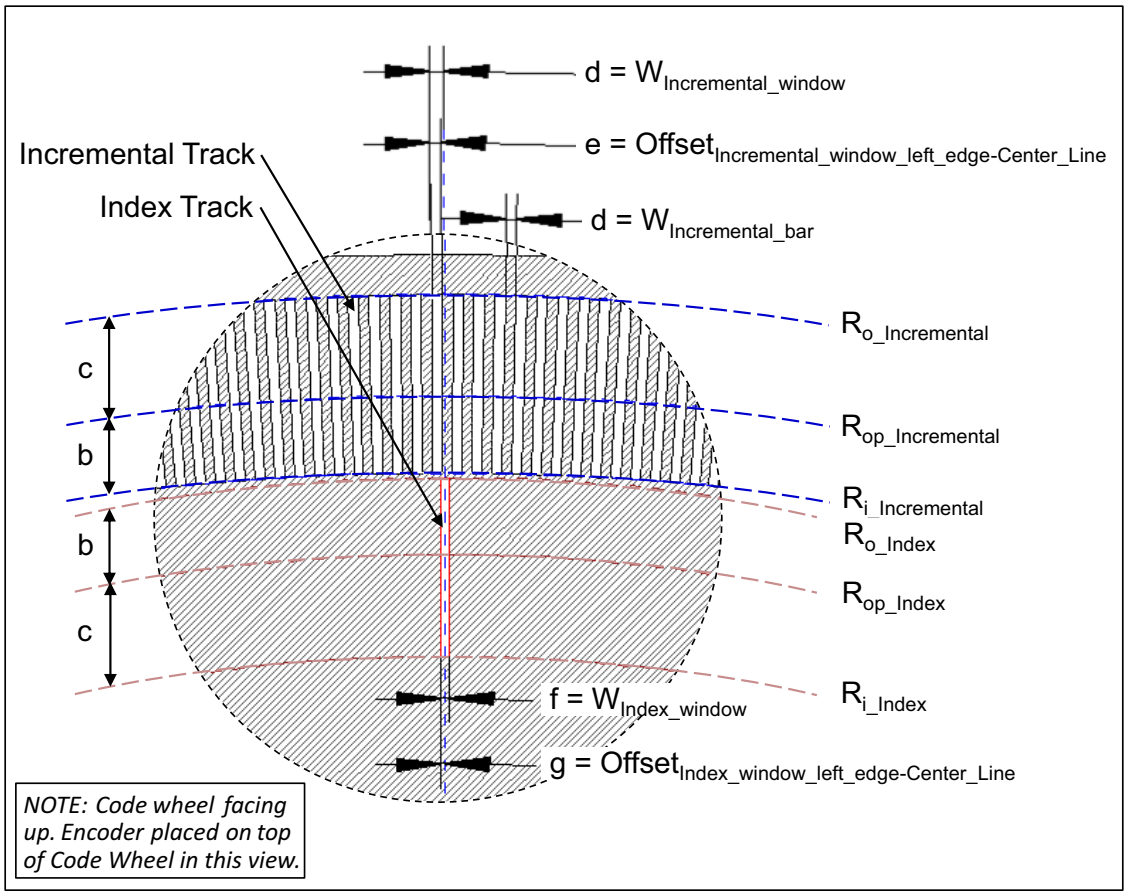

Dimension	Formula	Constant for AEDR-9830A
$R_{op_Incremental}$ (mm)	(25.4 / 318) × (CPR / 2π)	—
R_{op_Index} (mm)	—	R7.3198 from Point B
$R_{o_Incremental}$	$R_{op_Incremental}$ + c	—
$R_{i_Incremental}$	$R_{op_Incremental}$ – b	—
R_{o_Index}	R_{op_Index} + b	—
R_{i_Index}	R_{op_Index} – c	—
a (mm)	$R_{op_Incremental}$ – 7.9452	—
b (mm)	(0.625 – h) / 2	—
c (mm)	$R_{o_Incremental}$ – $R_{op_Incremental}$ or R_{op_Index} – R_{i_Index}	≥ 0.35
d (°)	(Pitch / 2) or ((360 / CPR) / 2)	—
e (°)	1.25d	—
f (°)	—	0.288
g(°)	f / 2	0.144
h (mm)	R_{o_Index} – $R_{i_Incremental}$ at Y-axis	0 ≥ h ≥ 0.05

Code Wheel Design Example

The following demonstrates a code wheel design for the AEDR-9830A at 625 CPR.


Determine $R_{op_Incremental}$	(25.4 / 318) × (625 / 2π)	≈ 7.9452 mm
Determine $R_{o_Incremental}$	7.9452 + 0.35	= 8.2952 mm
Determine $R_{i_Incremental}$	7.9452 – (0.625 / 2)	= 7.6327 mm
Determine Pitch	360 / 625	= 0.576°
Determine d	0.576 / 2	= 0.288°
Determine e	1.25 × 0.288	= 0.360°
With the preceding information, draw a trapezoid based on Point A (0, 0), populate 625x at pitch = 0.576°		
Determine a	7.9452 – 7.9452	= 0 mm
R_{op_Index}		= 7.3198 mm
R_{o_Index}	7.3198 + (0.625 / 2)	= 7.6323 mm
R_{i_Index}	7.3198 – 0.35	= 6.9698 mm
f		= 0.288°
g	f / 2	= 0.144°
With the preceding information, draw a trapezoid based on Point B (0, 0)		

The following demonstrates a code wheel design for the AEDR-9830A at 1200 CPR.

Determine $R_{op_Incremental}$	(25.4 / 318) × (1200 / 2π)	≈ 15.2549 mm
Determine $R_{o_Incremental}$	15.2549 + 0.35	= 15.6049 mm
Determine $R_{i_Incremental}$	15.2549 – (0.625 / 2)	= 14.9424 mm
Determine Pitch	360 / 1200	= 0.300°
Determine d	0.300 / 2	= 0.150°
Determine e	1.25 × 0.150	= 0.1875°
With the preceding information, draw a trapezoid based on Point A (0, 0), populate 1200x at pitch = 0.300°		
Determine a	15.2549 – 7.9452	= 7.3097 mm
R_{op_Index}		= 7.3198 mm
R_{o_Index}	7.3198 + (0.625 / 2)	= 7.6323 mm
R_{i_Index}	7.3198 – 0.35	= 6.9698 mm
f		= 0.288°
g	f / 2	= 0.144°
With the preceding information, draw a trapezoid based on Point B (0, 7.3097)		

Code Strip Design Guideline

The Incremental/Index window track is a reflective surface and the Incremental bar track is opaque.
The window width is denoted by W_{window} and the bar width is denoted by W_{bar}.
All windows and bars has the same width value, d.
There is an offset between Incremental window track and Index window track, denoted by e.

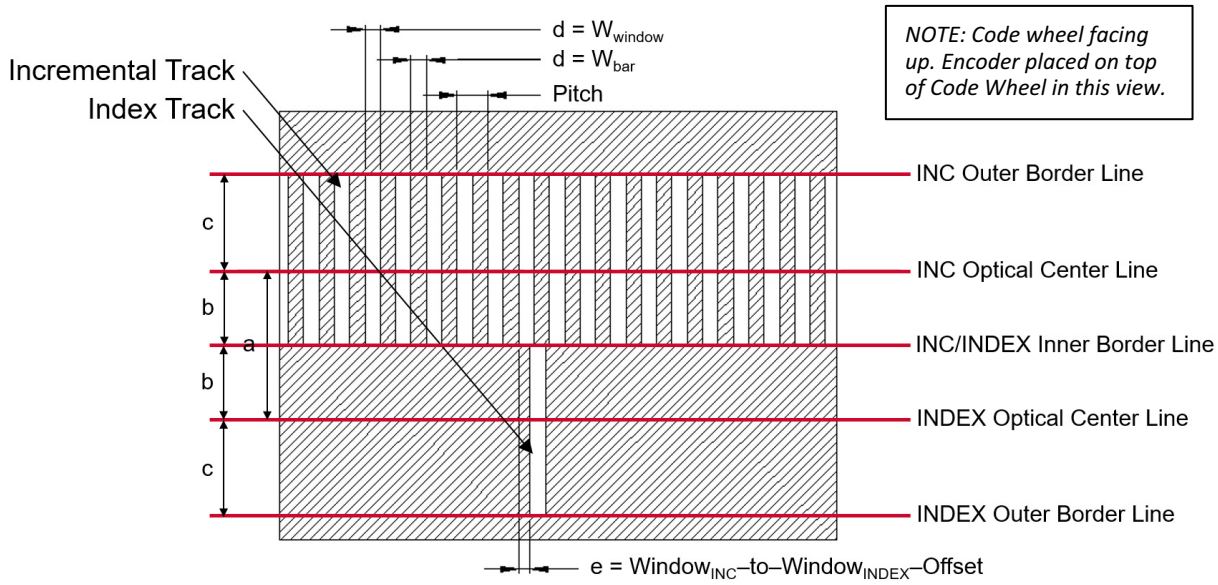


Dimension	Formula	318 LPI
Pitch (mm)	25.4 / LPI	0.080
a (mm)	$R_{OP_INC} - R_{OP_INDE}X$	0.625
b (mm)	$R_{OP_INC} - R_{I_INC}$ OR $R_{O_INDEX} - R_{OP_INDEX}$	a / 2
c (mm)	$R_{O_INC} - R_{OP_INC}$ OR $R_{OP_INDEX} - R_{I_INDEX}$	0.35
d (mm)	Pitch / 2	0.040
e (mm)	(3 / 4) × d	0.030

Multiple Index Pulse Code Wheel or Strip Design Guideline


For pseudo absolute encoder applications, the multiple Index pulse can be designed into the code wheel or strip. The minimum Index bar width is 3x the incremental pitch.

The recommended multiple Index pulse design guideline is shown in the following figure.

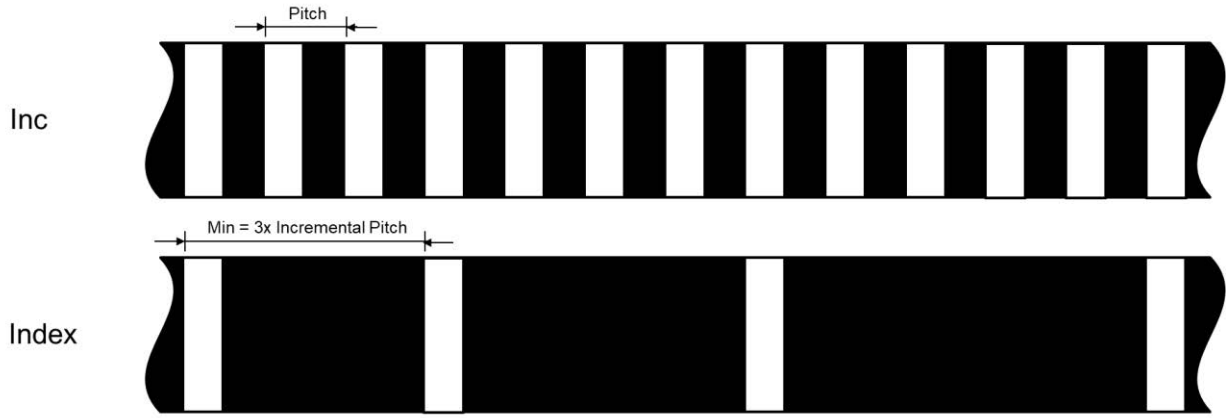

Example 1		**Example 2**	
LPI	= 318	CPR	= 900
Pitch	= 1inch / 318	Pitch	= 360° / 900
	≈ 80um		= 0.40°
Min Index Pitch	= 3 * 80	Min Index Pitch	= 3 * 0.40
	= 240um		= 1.20°


Package Outline Drawing

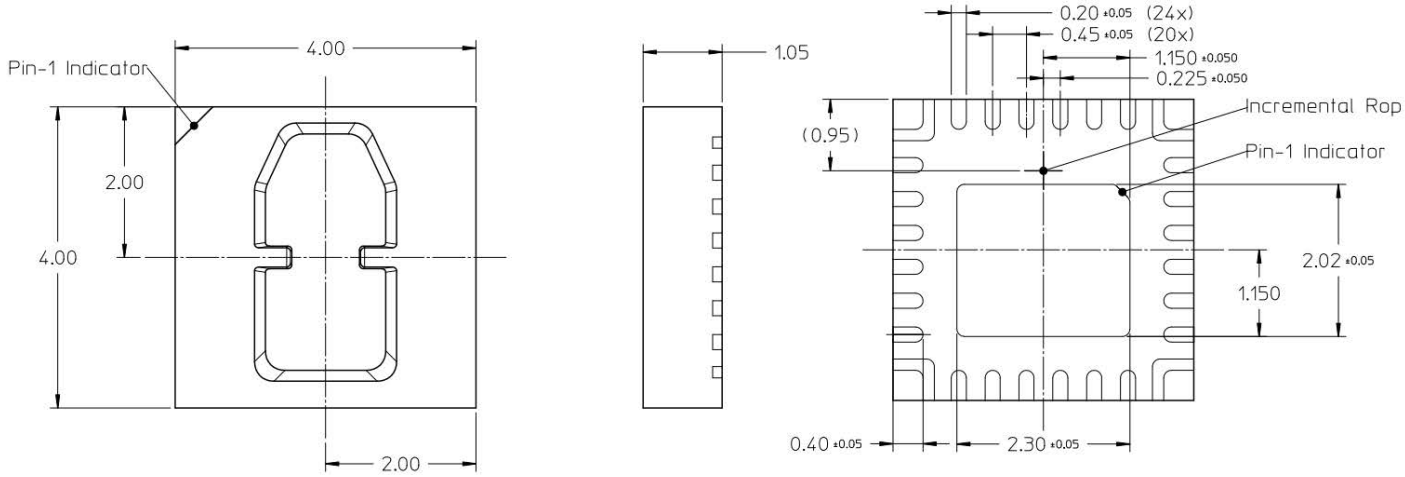

NOTE:

1. All dimensions are in mm.
2. Tolerance is x.xx ± 0.15 mm.

Recommended Land Pattern

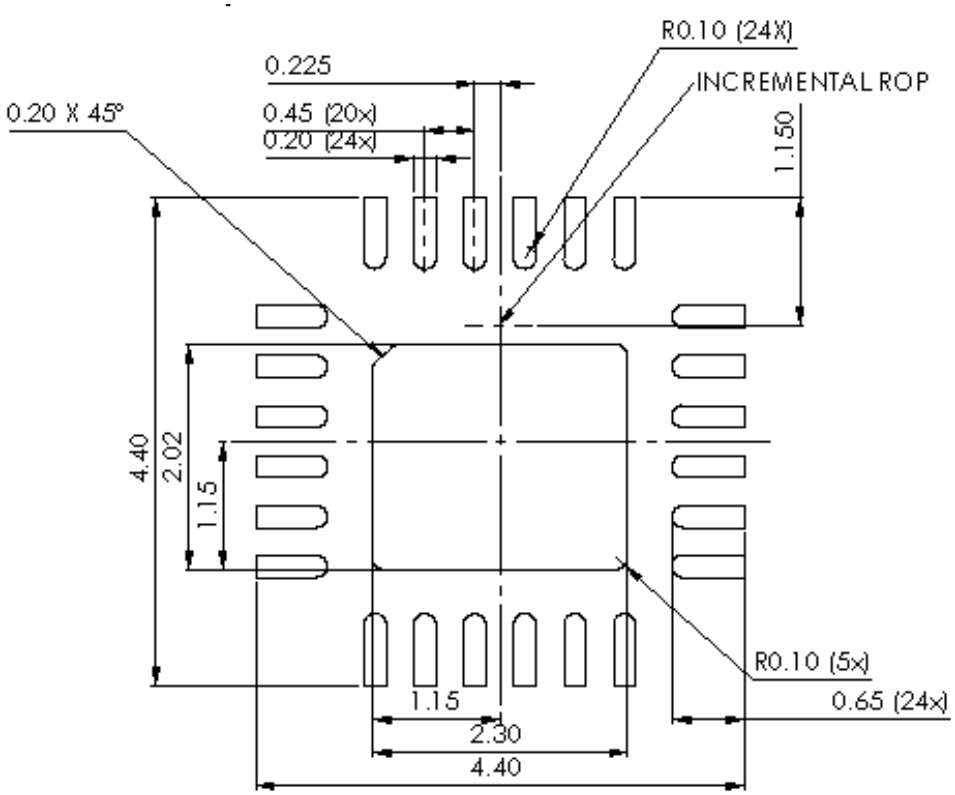

NOTE:


1. All dimensions are in mm.
2. Tolerance is x.xx ± 0.05 mm.


Encoder Placement Orientation, Position, and Direction of Movement


The AEDR-9830A is designed with both the emitter and detector dice placed in parallel to the code wheel window/bar orientation. The encoder package is mounted on top facing down onto the code wheel. When properly aligned, the detector side will be closer to the center of the code wheel than the emitter.

The optical center of the encoder package must be aligned tangential to the code wheel's Rop. The optimal gap setting recommended is 1.00 mm, with the range of 0.50 mm to 1.50 mm.


Channel A leads Channel B when the code wheel rotates anticlockwise and vice versa.

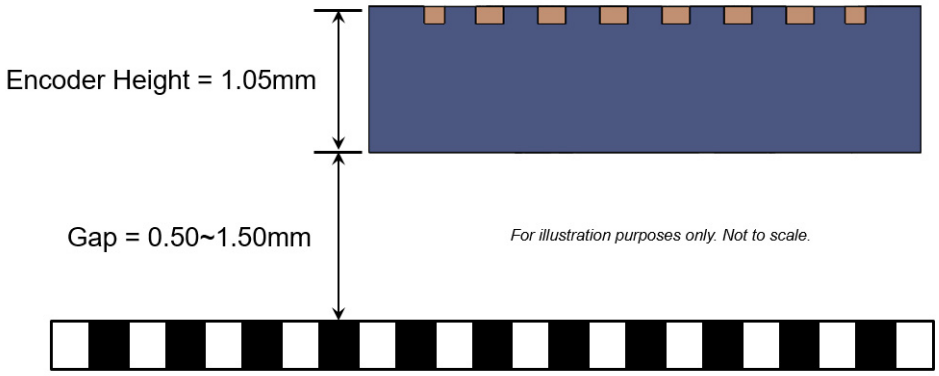

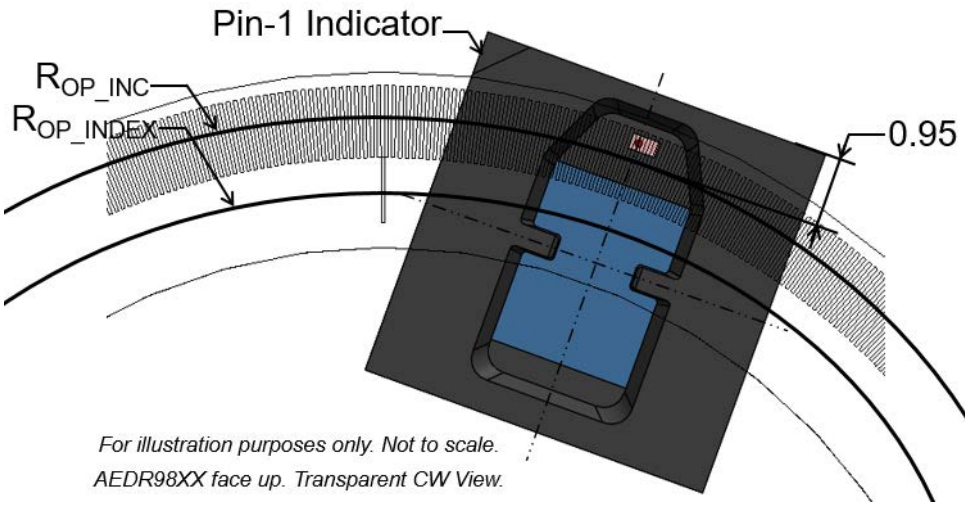

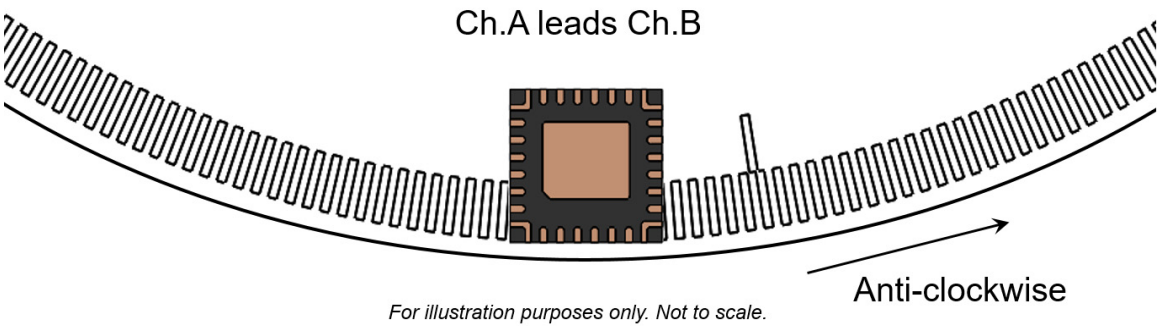

For illustration purposes only. Not to scale.

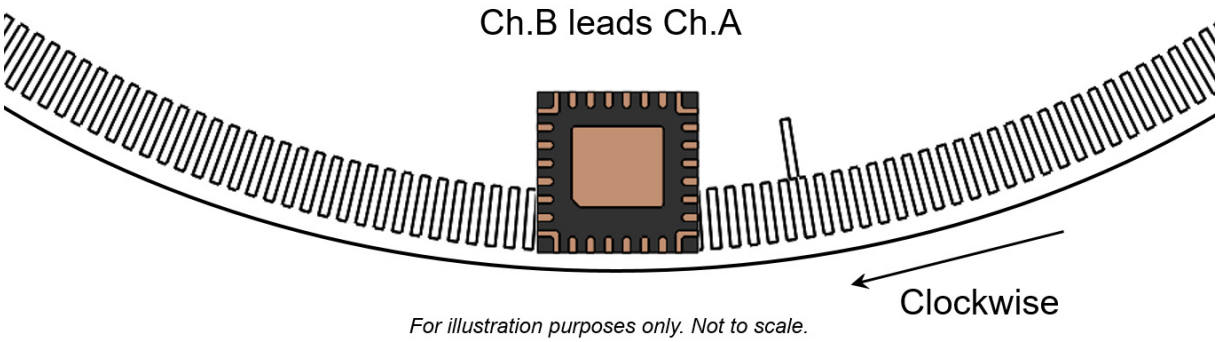

For illustration purposes only. Not to scale.

Moisture Sensitivity Level

The AEDR-9830A package is specified to moisture sensitive level 3 (MSL 3). Take precautions when handling this moisture-sensitive product to ensure the reliability of the product.

Storage before use

- An unopened moisture barrier bag (MBB) can be stored at < 40°C/90% RH for 12 months.
- Open the MBB just prior to assembly.

Control after opening the MBB

Mount the encoder that will be subjected to reflow soldering within 168 hours of factory condition < 30°C/60% RH.


Control for unfinished reel

Store a sealed MBB with desiccant or desiccators at a < 5% RH condition.

Baking is required if the following conditions exist


- The humidity indicator card (HIC) is > 10% when read at 23°C ± 5°C.
- The encoder floor life exceeded 168 hours.
- The recommended baking condition is 40°C ± 5°C for 22 hours (tape and reel) or 125°C ± 10°C for 1 hour (loose units).

Recommended Lead Free Solder Reflow Soldering Temperature Profile

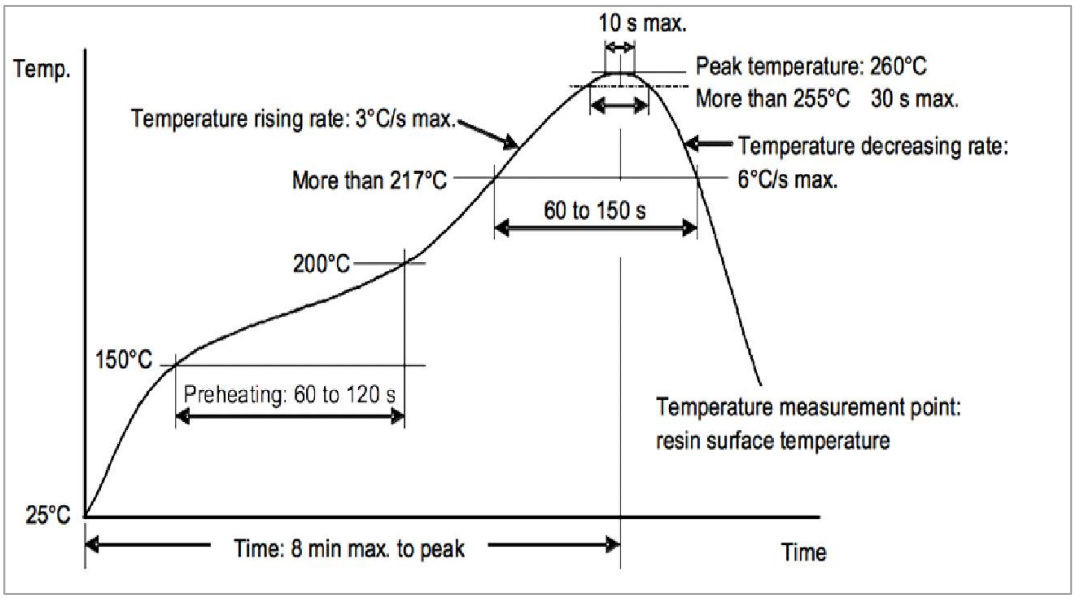


CAUTION! Exercise care when handling the encoder ASIC because it is a sensitive optical device. Remove the protective Kapton tape only after the reflow process and just before final assembly.

Tape and Reel Information

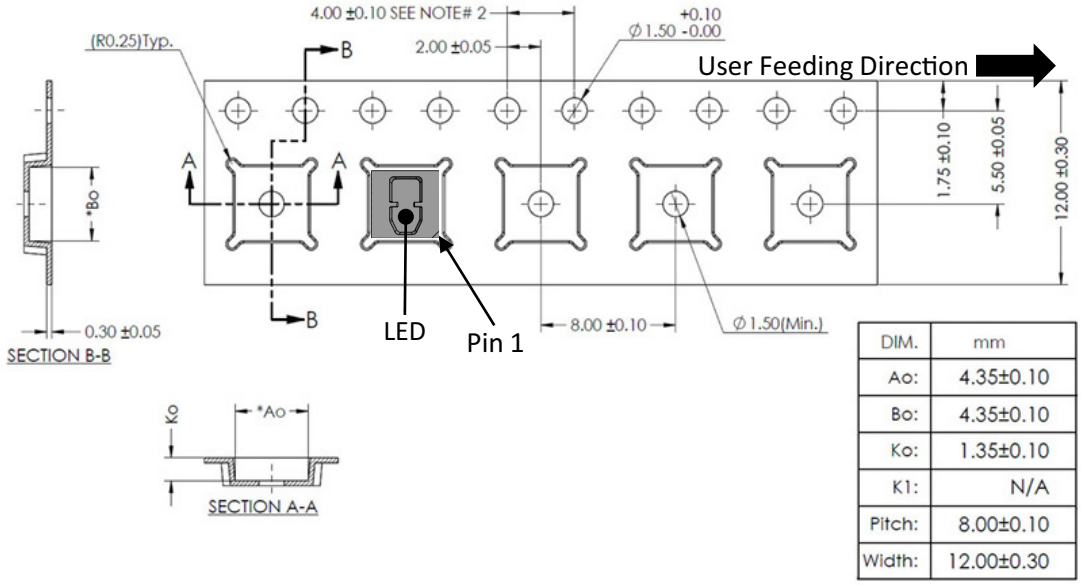

DIM.	mm
Ao:	4.35±0.10
Bo:	4.35±0.10
Ko:	1.35±0.10
K1:	N/A
Pitch:	8.00±0.10
Width:	12.00±0.30

Reel Dimensions

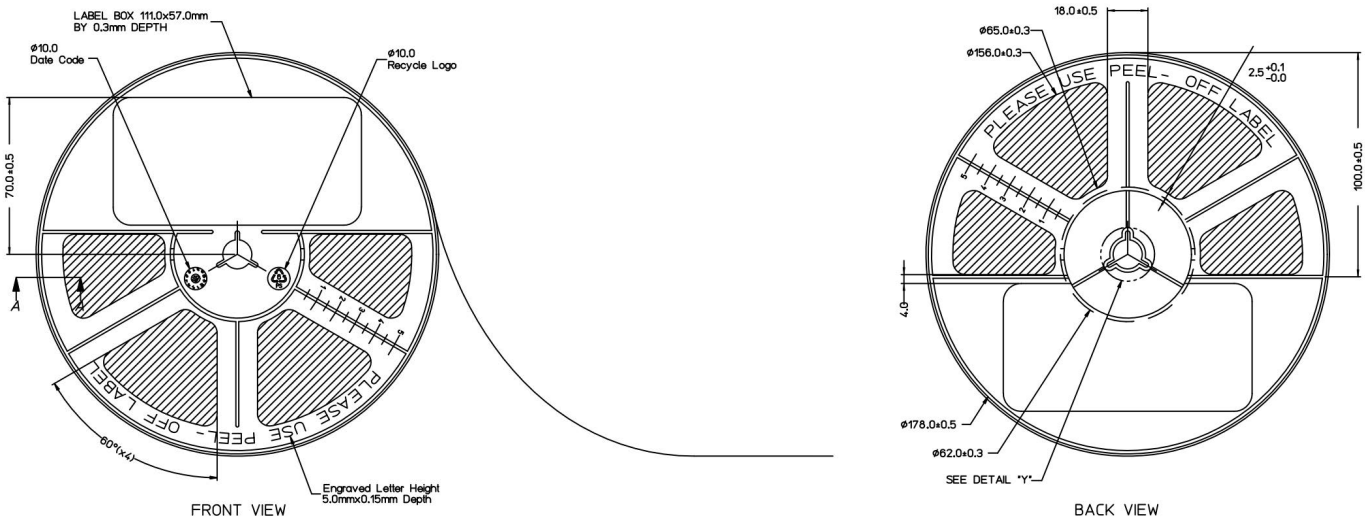

Ordering Information

A E D R - 9 8 3 0 A - 1 0 X

Resolution
3 - 318

Packaging
0 - 1000pcs 2 - 100pcs

Accessories Ordering Information

Part Number	Description
HEDS-9830EVB	AEDR-9830 Evaluation Board 318 LPI Evaluation Board and Code Wheel

Copyright © 2020–2022 Broadcom. All Rights Reserved. The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, go to www.broadcom.com. All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

