



光谱图

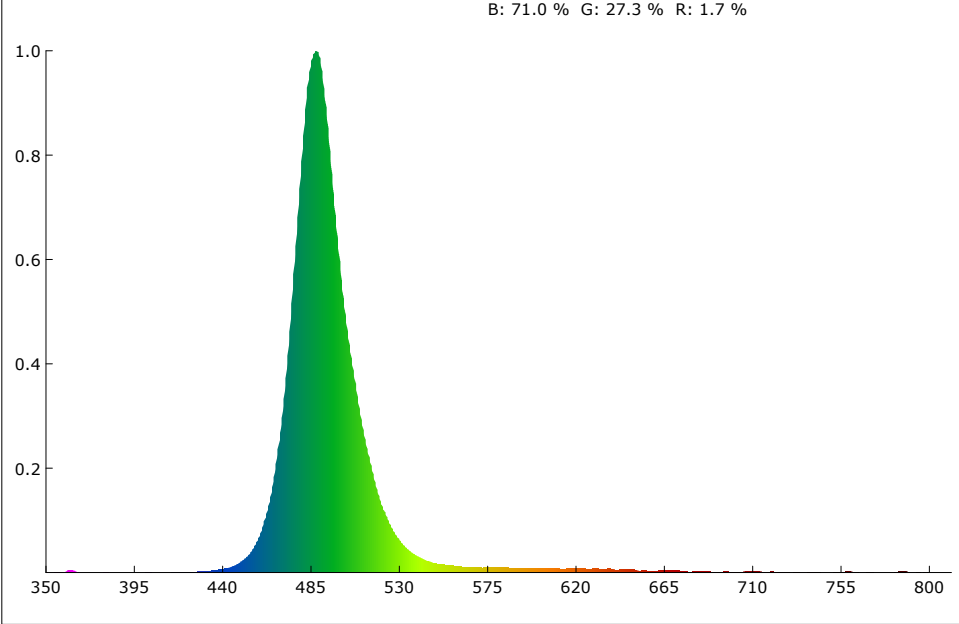

SDCM

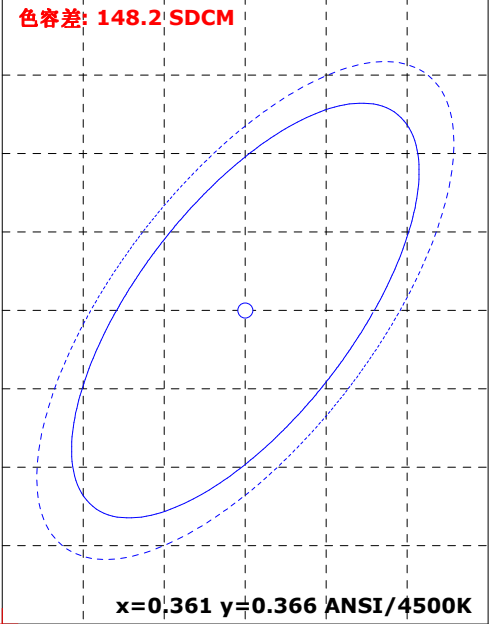

颜色参数:

坐标x: 0.0980 坐标y: 0.3114 坐标u: 0.0599 坐标v: 0.2857 坐标u': 0.0599 坐标v': 0.4286
红色比: 1.7 % 绿色比: 27.3 % 蓝色比: 71.0 % 光通量红色比: 1.5 % 光通量绿色比: 73.2 % 光通量蓝色比: 25.3 %

显色指数: -14.2 AvgR: -25.6
R1: 2.8 R2: -4.5 R3: -58.6 R4: -45.2 R5: 21.3 R6: -14.2 R7: -9.7 R8: -5.9
R9: -99.0 R10: -99.0 R11: -52.8 R12: -20.3 R13: -14.3 R14: 10.3 R15: 5.0


色温: 99999 K	光通量: 401.724 lm	峰值波长: 487.6 nm	色容差: 148.2
明暗视觉比: 7.4	中心波长: 489.0 nm	主波长: 490.5 nm	质心波长: 496.2 nm
半宽度: 27.1 nm	色偏差: 0.00684	色纯度: 81.1 %	色质指数: 4.7
LER(TM-30): 191.9	辐射功率: 2093.5 mw	色域指数(Rg): 20.2	逼真度(Rf): 1.9
红光辐射功率: 35.9 mw	近红辐射功率: 6.4 mw	远红辐射功率: 1.8 mw	

电参数:

光效: 6.8 Lm/W	能效: 7.4	能效等级: G	
电压: 219.8 V	电流: 0.450 A	功率: 59.490 W	功率因素: 0.618

产品型号:	制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号:	测试单位:
测试人员:	测试日期:03/19/14
备注:	

Rf: 1.9 CCT: 99999K u': 0.0599
Rg: 20.2 LER: 191.9 Duv: 0.00684 v': 0.4286

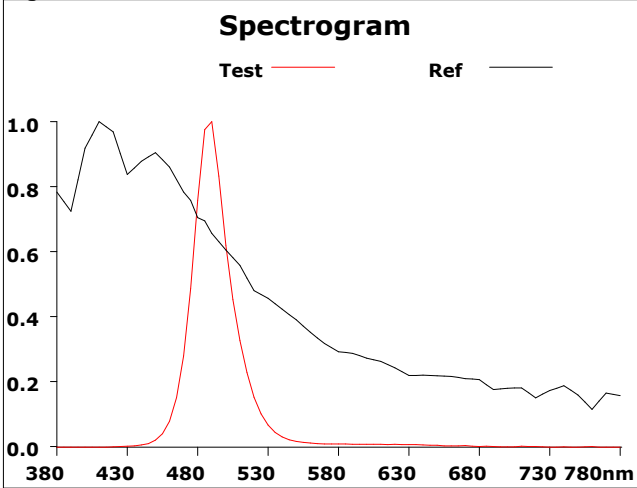

500			
Hue Bin	Rf	Chroma	Hue
1	2.1	-58.6%	-4.9%
2	0.0	-40.8%	-6.2%
3	5.0	-47.0%	-19.0%
4	0.3	-49.6%	-25.8%
5	0.2	-67.3%	-26.1%
6	5.4	-68.4%	-21.7%
7	0.8	-71.2%	-23.7%
8	8.2	-63.2%	-0.5%
9	4.6	-50.0%	1.1%
10	10.8	-41.8%	-6.3%
11	0.8	-37.7%	-20.5%
12	21.0	-43.2%	-39.0%
13	1.2	-57.1%	-43.3%
14	0.3	-67.5%	-49.1%
15	5.0	-78.9%	-48.9%
16	0.2	-67.0%	-14.2%

