2.5V - 2.6V PHASE LOCKED LOOP DIFFERENTIAL 1:10 SDRAM CLOCK DRIVER

IDTCSPT857C

FEATURES:

- **1 to 10 differential clock distribution**
- **Optimized for clock distribution in DDR (Double Data Rate) SDRAM applications**
- **Operating frequency: 60MHz to 220MHz**
- **Very low skew:**
  - *<100ps for PC1600 - PC2700*
  - *<75ps for PC3200*
- **Very low jitter:**
  - *<75ps for PC1600 - PC2700*
  - *<50ps for PC3200*
- **2.5V AV_{DD} and 2.5V V_{DDQ} for PC1600-PC2700**
- **2.6V AV_{DD} and 2.6V V_{DDQ} for PC3200**
- **CMOS control signal input**
- **Test mode enables buffers while disabling PLL**
- **Low current power-down mode**
- **Tolerant of Spread Spectrum input clock**
- **Available in 48-pin TSSOP, 40-pin VFQFPN, and 56-pin VFBGA packages**

APPLICATIONS:

- **Meets or exceeds JEDEC standard JESD 82-1A for registered DDR clock driver**
- **Meets proposed DDR1-400 specification**
- **For all DDR1 speeds: PC1600 (DDR200), PC2100 (DDR266), PC2700 (DDR333), PC3200 (DDR400)**
- **Along with SSTV16857, SSTVF16857, SSTV16859, SSTVM16859, SSTVF16859, DDR1 register, provides complete solution for DDR1 DIMMs**

DESCRIPTION:


The CSPT857C is a PLL based clock driver that acts as a zero delay buffer to distribute one differential clock input pair (CLK, $\overline{CLK}$) to 10 differential output pairs (Y [0:9], $\overline{Y}$ [0:9]) and one differential pair of feedback clock output (FBOUT, $\overline{FBOUT}$). External feedback pins (FBIN, $\overline{FBIN}$) for synchronization of the outputs to the input reference is provided. A CMOS Enable/Disable pin is available for low power disable. When the input frequency falls below approximately 20MHz, the device will enter power down mode. In this mode, the receivers are disabled, the PLL is turned off, and the output clock drivers are tristated, resulting in a current consumption of less than 200µA.

The CSPT857C requires no external components and has been optimised for very low I/O phase error, skew, and jitter, while maintaining frequency and duty cycle over the operating voltage and temperature range. The CSPT857C, designed for use in both module assemblies and system motherboard based solutions, provides an optimum high-performance clock source.

The CSPT857C is available in Commercial Temperature Range (0°C to +70°C) and Industrial Temperature Range (-40°C to +85°C). See Ordering Information for details.

© 2019 Renesas Electronics Corporation

FUNCTIONAL BLOCK DIAGRAM

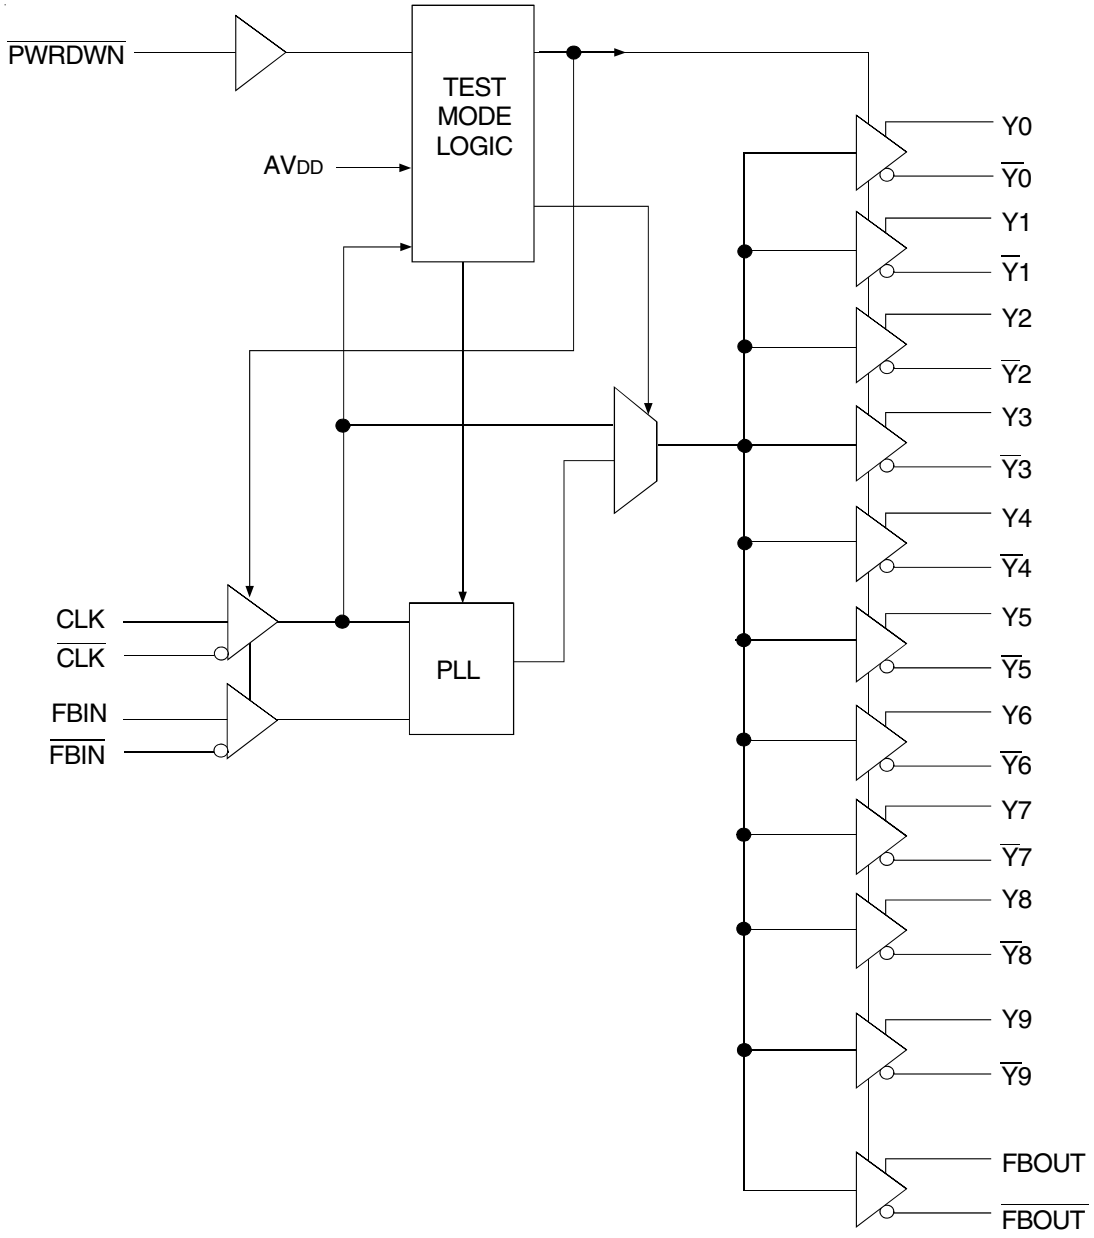


© 2019 Renesas Electronics Corporation

PIN CONFIGURATIONS

	A	B	C	D	E	F	G	H	J	K
6	Y5	$\overline{Y6}$	GND	Y7	$\overline{PWR/DWN}$	FBIN	VDDQ	FBOUT	$\overline{Y8}$	Y9
5	$\overline{Y5}$	Y6	GND	$\overline{Y7}$	VDDQ	$\overline{FBIN}$	$\overline{FBOUT}$	GND	Y8	$\overline{Y9}$
4	GND	VDDQ	NC	NC			NC	NC	VDDQ	GND
3	GND	VDDQ	NC	NC			NC	NC	VDDQ	GND
2	$\overline{Y0}$	Y1	GND	$\overline{Y2}$	VDDQ	$\overline{CLK}$	AVDD	GND	Y3	$\overline{Y4}$
1	Y0	$\overline{Y1}$	GND	Y2	VDDQ	CLK	VDDQ	AGND	$\overline{Y3}$	Y4


VFBGA
TOP VIEW

56 BALL VFBGA PACKAGE LAYOUT

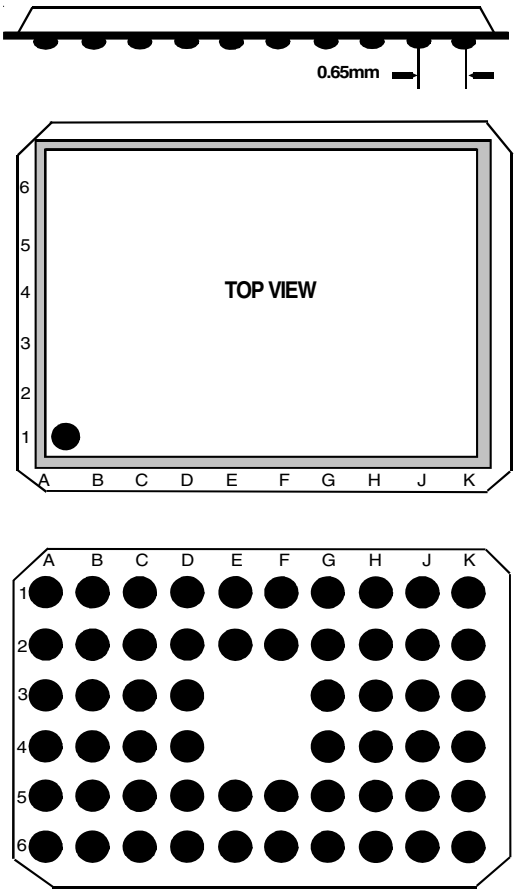


© 2019 Renesas Electronics Corporation

PIN CONFIGURATIONS

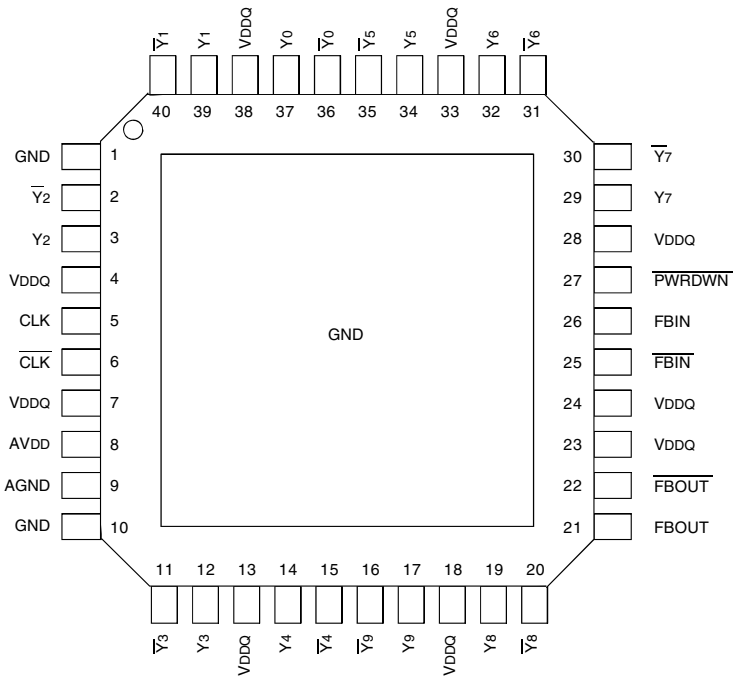

VFQFPN
TOP VIEW

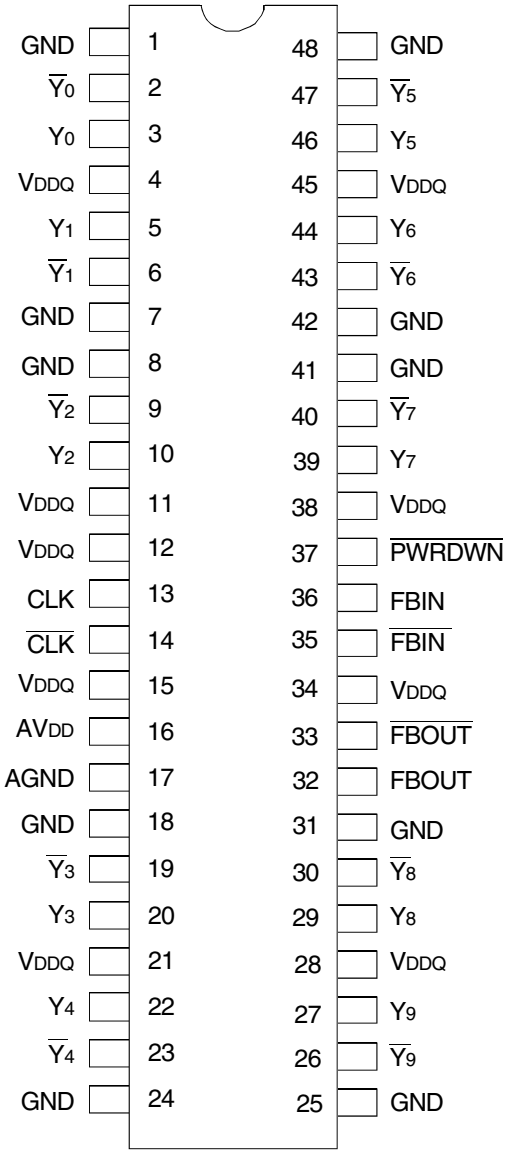

TSSOP
TOP VIEW

ABSOLUTE MAXIMUM RATINGS(1)

Symbol	Rating	Max	Unit
V_{DDQ}, AV_{DD}	Supply Voltage Range	–0.5 to +3.6	V
V_I(2)	Input Voltage Range	–0.5 to V_{DDQ} + 0.5	V
V_O(2)	Voltage range applied to any output in the high or low state	–0.5 to V_{DDQ} + 0.5	V
I_{IK} (V_I <0)	Input Clamp Current	–50	mA
I_{OK} (V_O <0 or V_O > V_{DDQ})	Output Clamp Current	±50	mA
I_O (V_O =0 to V_{DDQ})	Continuous Output Current	±50	mA
V_{DDQ} or GND	Continuous Current	±100	mA
TSTG	Storage Temperature Range	– 65 to +150	° C

NOTES:
1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
3. The maximum package power dissipation is calculated using a junction temperature of 150°C and a board trace length of 750 mils.

CAPACITANCE(1)

Parameter	Description	Min.	Typ.	Max.	Unit
C_{IN}	Input Capacitance V_I = V_{DDQ} or GND	2.5	—	3.5	pF
$C_{I(\Delta)}$	Delta Input Capacitance V_I = V_{DDQ} or GND	-0.25	—	0.25	pF
C_L	Load Capacitance	—	14	—	pF

NOTE:
1. Unused inputs must be held high or low to prevent them from floating.

© 2019 Renesas Electronics Corporation

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter		Min.	Typ.	Max.	Unit
AV_{DD}	Supply Voltage		V_{DDQ}–0.12	V_{DDQ}	2.7	V
V_{DDQ}	I/O Supply Voltage	PC1600-PC2700	2.3	2.5	2.7	V
		PC3200	2.5	2.6	2.7	
T_A	Operating Free-Air Temperature		-40	—	+85	°C

PIN DESCRIPTION (TSSOP/TVSOP)

Pin Name	Pin Number	Description
AGND	17	Ground for analog supply
AV_{DD}	16	Analog supply
CLK, $\overline{CLK}$	13, 14	Differential clock input
$\overline{FBIN}$, FBIN	35, 36	Feedback differential clock input
FBOUT, $\overline{FBOUT}$	32, 33	Feedback differential clock output
GND	1, 7, 8, 18, 24, 25, 31, 41, 42, 48	Ground
$\overline{PWRDWN}$	37	Output enable for Y and $\overline{Y}$
V_{DDQ}	4, 11, 12, 15, 21, 28, 34, 38, 45	I/O supply
$Y_{[0:9]}$	3, 5, 10, 20, 22, 27, 29, 39, 44, 46	Buffered output of input clock, CLK
$\overline{Y}_{[0:9]}$	2, 6, 9, 19, 23, 26, 30, 40, 43, 47	Buffered output of input clock, $\overline{CLK}$

PIN DESCRIPTION (VFBGA)

Pin Name	Pin Number	Description
AGND	H1	Ground for analog supply
AV_{DD}	G2	Analog supply
CLK, $\overline{CLK}$	F1, F2	Differential clock input
$\overline{FBIN}$, FBIN	F5, F6	Feedback differential clock input
FBOUT, $\overline{FBOUT}$	H6, G5	Feedback differential clock output
GND	A3, A4, C1, C2, C5, C6, H2, H5, K3, K4	Ground
$\overline{PWRDWN}$	E6	Output enable for Y and $\overline{Y}$
V_{DDQ}	B3, B4, E1, E2, E5, G1, G6, J3, J4	I/O supply
$Y_{[0:9]}$	A1, A6, B2, B5, D1, D6, J2, J5, K1, K6	Buffered output of input clock, CLK
$\overline{Y}_{[0:9]}$	A2, A5, B1, B6, D2, D5, J1, J6, K2, K5	Buffered output of input clock, $\overline{CLK}$

PIN DESCRIPTION (MLF)

Pin Name	Pin Number	Description
AGND	9	Ground for analog supply
AV_{DD}	8	Analog supply
CLK, $\overline{CLK}$	5, 6	Differential clock input
$\overline{FBIN}$, FBIN	25, 26	Feedback differential clock input
FBOUT, $\overline{FBOUT}$	21, 22	Feedback differential clock output
GND	1, 10	Ground
$\overline{PWRDWN}$	27	Output enable for Y and $\overline{Y}$
V_{DDQ}	4, 7, 13, 18, 23, 24, 28, 33, 38	I/O supply
$Y_{[0:9]}$	3, 12, 14, 17, 19, 29, 32, 34, 37, 39	Buffered output of input clock, CLK
$\overline{Y}_{[0:9]}$	2, 11, 15, 16, 20, 30, 31, 35, 36, 40	Buffered output of input clock, $\overline{CLK}$

© 2019 Renesas Electronics Corporation

FUNCTION TABLE(1)

INPUTS				OUTPUTS				
AVDD	$\overline{PWRDWN}$	CLK	$\overline{CLK}$	Y	$\overline{Y}$	FBOUT	$\overline{FBOUT}$	PLL
GND	H	L	H	L	H	L	H	Bypassed/OFF
GND	H	H	L	H	L	H	L	Bypassed/OFF
X	L	L	H	Z	Z	Z	Z	OFF
X	L	H	L	Z	Z	Z	Z	OFF
Nominal(2)	H	L	H	L	H	L	H	ON
Nominal(2)	H	H	L	H	L	H	L	ON
Nominal(2,3)	X	<20MHz	<20MHz	Z	Z	Z	Z	OFF

NOTES:
1. H = HIGH Voltage Level
   L = LOW Voltage Level
   Z = High-Impedance OFF-State
   X = Don't Care
2. AVDD nominal is 2.5V for PC1600, PC2100, and PC2700. AVDD nominal is 2.6V for PC3200.
3. Additional feature that senses when the clock input is less than approximately 20MHz and places the part in sleep mode. Reciever inputs and PLL are turned off and outputs = tristate.

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE FOR PC1600 - PC2700

Following Conditions Apply Unless Otherwise Specified:
Commercial: T_A = 0°C to +70°C; Industrial: T_A = -40°C to +85°C

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{IK}	Input Clamp Voltage (All Inputs)	V_{DDQ} = 2.3V, I_I = -18mA	—	—	–1.2	V
$V_{IL(dc)}$	Static Input LOW Voltage	$\overline{PWRDWN}$	–0.3	—	0.7	V
$V_{IH(dc)}$	Static Input HIGH Voltage	$\overline{PWRDWN}$	1.7	—	V_{DDQ} + 0.3	
$V_{IL(ac)}$	Dynamic Input LOW Voltage	CLK, $\overline{CLK}$, FBIN, $\overline{FBIN}$	—	—	0.7	V
$V_{IH(ac)}$	Dynamic Input HIGH Voltage	CLK, $\overline{CLK}$, FBIN, $\overline{FBIN}$	1.7		V_{DDQ}	
V_{OL}	Output LOW Voltage	A_{VDD}/V_{DDQ} = Min., I_{OL} = 100µA	—		0.1	V
		A_{VDD}/V_{DDQ} = Min., I_{OL} = 12mA	—		0.6	
V_{OH}	Output HIGH Voltage	A_{VDD}/V_{DDQ} = Min., I_{OH} = -100µA	V_{DDQ} – 0.1			V
		A_{VDD}/V_{DDQ} = Min., I_{OH} = -12mA	1.7			
V_{IX}	Input Differential Cross Voltage		$V_{DDQ}/2$ – 0.2		$V_{DDQ}/2$ + 0.2	V
$V_{ID(DC)}$(1)	DC Input Differential Voltage		0.36		V_{DDQ} + 0.6	V
$V_{ID(AC)}$(1)	AC Input Differential Voltage		0.7		V_{DDQ} + 0.6	V
I_{IN}	Input Current	V_{DDQ} = 2.7V, V_I = 0V to 2.7V			±10	µA
I_{DDPD}	Power-Down Current on V_{DDQ} and A_{VDD}	A_{VDD}/V_{DDQ} = Max., CLK = 0MHz or $\overline{PWRDWN}$ = L	—	100	200	µA
I_{DDQ}	Dynamic Power Supply Current on V_{DDQ}	A_{VDD}/V_{DDQ} = Max., CLK = 200MHz, 120Ω/14pF	—	320	360	mA
		A_{VDD}/V_{DDQ} = Max., CLK = 170MHz, 120Ω/14pF	—	250	300	
I_{ADD}	Dynamic Power Supply Current on A_{VDD}	A_{VDD}/V_{DDQ} = Max., CLK = 170MHz	—		12	mA

NOTE:
1. V_{ID} is the magnitude of the difference between the input level on CLK and the input level on $\overline{CLK}$.

© 2019 Renesas Electronics Corporation

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE FOR PC3200

Following Conditions Apply Unless Otherwise Specified:
Commercial: T_A = 0°C to +70°C; Industrial: T_A = -40°C to +85°C

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{IK}	Input Clamp Voltage (All Inputs)	V_{DDQ} = 2.5V, I_I = -18mA	—	—	– 1.2	V
$V_{IL(dc)}$	Static Input LOW Voltage	$\overline{PWRDWN}$	– 0.3	—	0.7	V
$V_{IH(dc)}$	Static Input HIGH Voltage	$\overline{PWRDWN}$	1.7	—	V_{DDQ} + 0.3	
$V_{IL(ac)}$	Dynamic Input LOW Voltage	CLK, $\overline{CLK}$, FBIN, $\overline{FBIN}$	—	—	0.7	V
$V_{IH(ac)}$	Dynamic Input HIGH Voltage	CLK, $\overline{CLK}$, FBIN, $\overline{FBIN}$	1.7		V_{DDQ}	
V_{OL}	Output LOW Voltage	A_{VDD}/V_{DDQ} = Min., I_{OL} = 100µA	—		0.1	V
		A_{VDD}/V_{DDQ} = Min., I_{OL} = 12mA	—		0.6	
V_{OH}	Output HIGH Voltage	A_{VDD}/V_{DDQ} = Min., I_{OH} = -100µA	V_{DDQ} – 0.1			V
		A_{VDD}/V_{DDQ} = Min., I_{OH} = -12mA	1.7			
V_{IX}	Input Differential Cross Voltage		$V_{DDQ}/2$ – 0.2		$V_{DDQ}/2$ + 0.2	V
$V_{ID(DC)}$ (1)	DC Input Differential Voltage		0.36		V_{DDQ} + 0.6	V
$V_{ID(AC)}$ (1)	AC Input Differential Voltage		0.7		V_{DDQ} + 0.6	V
I_{IN}	Input Current	V_{DDQ} = 2.7V, V_I = 0V to 2.7V			±10	µA
I_{DDPD}	Power-Down Current on V_{DDQ} and A_{VDD}	A_{VDD}/V_{DDQ} = Max., CLK = 0MHz or $\overline{PWRDWN}$ = L	—	100	200	µA
I_{DDQ}	Dynamic Power Supply Current on V_{DDQ}	A_{VDD}/V_{DDQ} = Max., CLK = 200MHz, 120Ω/14pF	—	320	360	mA
		A_{VDD}/V_{DDQ} = Max., CLK = 200MHz, 120Ω/14pF	—	250	300	
I_{ADD}	Dynamic Power Supply Current on A_{VDD}	A_{VDD}/V_{DDQ} = Max., CLK = 200MHz	—		12	mA

NOTE:
1. V_{ID} is the magnitude of the difference between the input level on CLK and the input level on $\overline{CLK}$.

TIMING REQUIREMENTS FOR PC1600 - PC2700

Symbol	Parameter	Min.	Max.	Unit
f_{CLK}	Operating Clock Frequency(1,2)	60	200	MHz
	Application Clock Frequency(1,3)	60	200	MHz
t_{DC}	Input Clock Duty Cycle	40	60	%
t_L	Stabilization Time(4)	—	100	µs

NOTES:
1. The PLL will track a spread spectrum clock input.
2. Operating clock frequency is the range over which the PLL will lock, but may not meet all timing specifications.
3. Application clock frequency is the range over which timing specifications apply.
4. Stabilization time is the time required for the integrated PLL circuit to obtain phase lock of its feedback signal to its reference signal after power up.

TIMING REQUIREMENTS FOR PC3200

Symbol	Parameter	Min.	Max.	Unit
f_{CLK}	Operating Clock Frequency(1,2)	60	220	MHz
	Application Clock Frequency(1,3)	60	220	MHz
t_{DC}	Input Clock Duty Cycle	40	60	%
t_L	Stabilization Time(4)	—	100	µs

NOTES:
1. The PLL will track a spread spectrum clock input.
2. Operating clock frequency is the range over which the PLL will lock, but may not meet all timing specifications.
3. Application clock frequency is the range over which timing specifications apply.
4. Stabilization time is the time required for the integrated PLL circuit to obtain phase lock of its feedback signal to its reference signal after power up.

© 2019 Renesas Electronics Corporation

SWITCHING CHARACTERISTICS FOR PC1600 - PC2700

Symbol	Description	Test Conditions	Min.	Typ.(1)	Max.	Unit
t_{PLH}(1)	LOW to HIGH Level Propagation Delay Time	Test mode, CLK to any output		4.5		ns
t_{PHL}(1)	HIGH to LOW Level Propagation Delay Time	Test mode, CLK to any output		4.5		ns
$t_{JIT(PER)}$	Jitter (period), see figure 6	66MHz	–90		90	ps
		100/ 133/ 167/ 200 MHz	–75		75	
$t_{JIT(CC)}$	Jitter (cycle-to-cycle), see figure 3	66MHz	–180		180	ps
		100/ 133/ 167/ 200 MHz	–75		75	
$t_{JIT(HPER)}$	Half-Period Jitter, see figure 7	66MHz	–160		160	ps
		100/ 133/ 167/ 200 MHz	–100		100	
$t_{SLR(O)}$	Output Clock Slew Rate (Single-Ended)	100/ 133/ 167/ 200 MHz (20% to 80%)	1		2.5	V/ns
$t_{SLR(I)}$	Input Clock Slew Rate		1		4	V/ns
$t_{(\varnothing)}$	Static Phase Offset, see figure 4(2,3)	66/ 100/ 133/ 167/ 200 MHz	–50		50	ps
$t_{SK(O)}$	Output Skew, see figure 5				75	ps
t_R, t_F	Output Rise and Fall Times (20% to 80%)	Load: 120Ω / 14pF	650		900	ps
V_{OX}(5)	Output Differential Voltage	Differential outputs are terminated with 120Ω	V_{DDQ}/2 –0.15		V_{DDQ}/2 +0.15	V
The PLL on the CSPT857 will meet all the above test parameters while supporting SSC synthesizers(4) with the following parameters:						
SSC	Modulation Frequency	—	30	—	50	KHz
SSC	Clock Input Frequency Deviation	—	0	—	-0.5	%
f_{3dB}	PLL Loop Bandwidth	—	—	5	—	MHz

NOTES:
1. Refers to transition of non-inverting output.
2. Static phase offset does not include jitter.
3. $t(\phi)$ is measured with input clock slew rate $t_{SLR(I)}$ = 2V/ns and an input differential voltage V_{ID} of 1.75V.
4. The SSC requirements meet the Intel PC100 SDRAM Registered DIMM specification.
5. V_{OX} is specified at the SDRAM clock input or test load.

© 2019 Renesas Electronics Corporation

SWITCHING CHARACTERISTICS FOR PC3200

Symbol	Description	Test Conditions	Min.	Typ.(1)	Max.	Unit
t_{PLH}(1)	LOW to HIGH Level Propagation Delay Time	Test mode, CLK to any output		4.5		ns
t_{PHL}(1)	HIGH to LOW Level Propagation Delay Time	Test mode, CLK to any output		4.5		ns
$t_{JIT(PER)}$	Jitter (period), see figure 6	66MHz	–90		90	ps
		200 MHz	–50		50	
$t_{JIT(CC)}$	Jitter (cycle-to-cycle), see figure 3	66MHz	–180		180	ps
		200 MHz	–75		75	
$t_{JIT(HPER)}$	Half-Period Jitter, see figure 7	66MHz	–160		160	ps
		200 MHz	–75		75	
$t_{SLR(O)}$	Output Clock Slew Rate (Single-Ended)	200 MHz (20% to 80%)	1		2.5	V/ns
$t_{SLR(I)}$	Input Clock Slew Rate		1		4	V/ns
$t_{(\varnothing)}$	Static Phase Offset, see figure 4(2,3)	200 MHz	–50		50	ps
$t_{SK(O)}$	Output Skew, see figure 5				75	ps
t_R, t_F	Output Rise and Fall Times (20% to 80%)	Load: 120Ω / 14pF	650		900	ps
V_{OX}(5)	Output Differential Voltage	Differential outputs are terminated with 120Ω	V_{DDQ}/2 –0.15		V_{DDQ}/2 +0.15	V
The PLL on the CSPT857 will meet all the above test parameters while supporting SSC synthesizers(4) with the following parameters:						
SSC	Modulation Frequency	—	30	—	50	KHz
SSC	Clock Input Frequency Deviation	—	0	—	-0.5	%
f_{3dB}	PLL Loop Bandwidth	—	—	5	—	MHz

NOTES:
1. Refers to transition of non-inverting output.
2. Static phase offset does not include jitter.
3. $t(\phi)$ is measured with input clock slew rate $t_{SLR(I)}$ = 2V/ns and an input differential voltage V_{ID} of 1.75V.
4. The SSC requirements meet the Intel PC100 SDRAM Registered DIMM specification.
5. V_{OX} is specified at the SDRAM clock input or test load.

© 2019 Renesas Electronics Corporation

TEST CIRCUIT AND SWITCHING WAVEFORMS

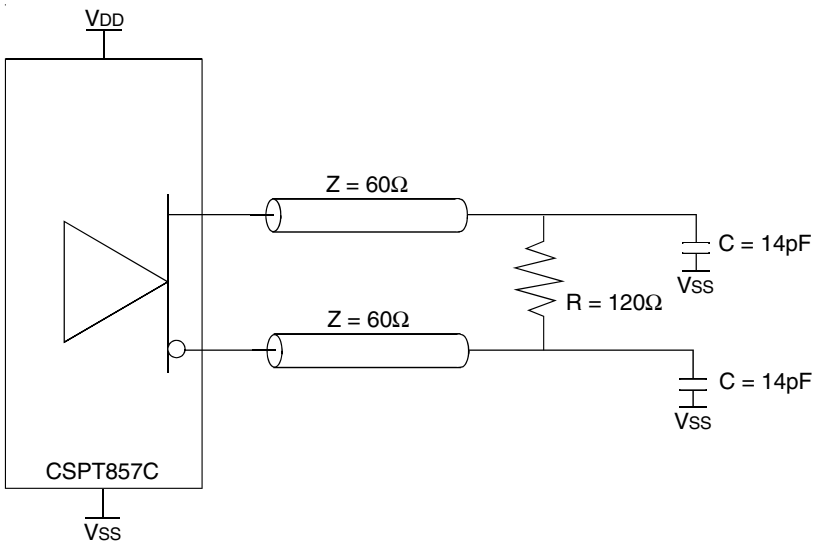


Figure 1. Output Load


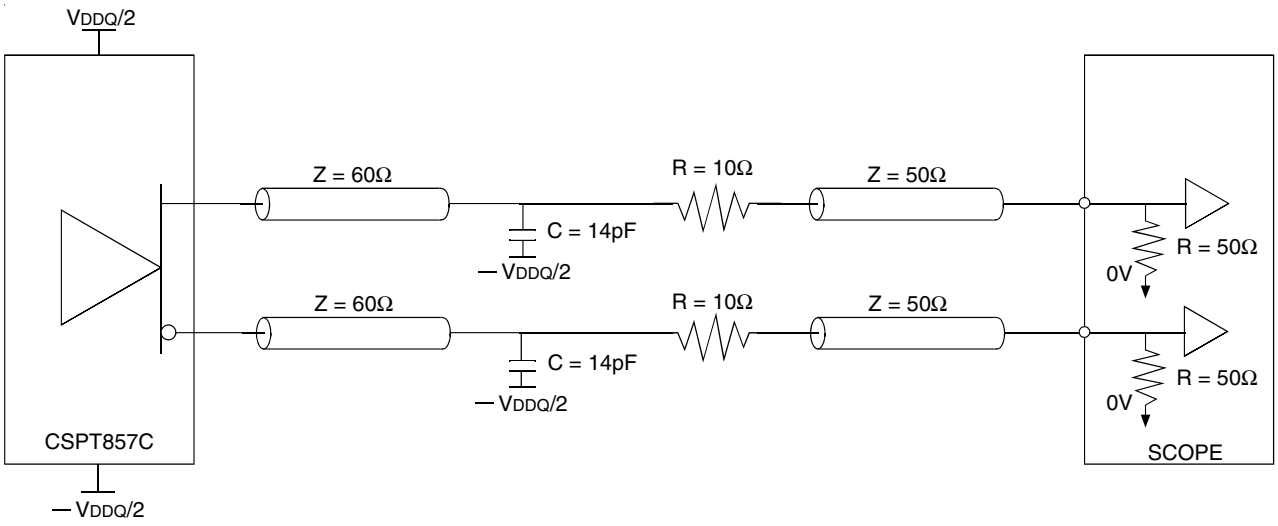


Figure 2. Output Load Test Circuit


© 2019 Renesas Electronics Corporation

TEST CIRCUIT AND SWITCHING WAVEFORMS

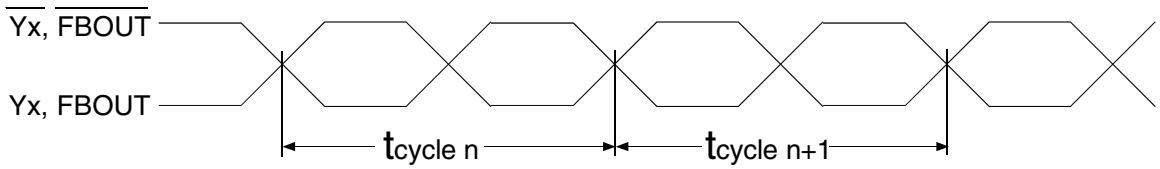

$$t_{jit(cc)} = t_{cycle\ n} - t_{cycle\ n+1}$$

Figure 3. Cycle-to-Cycle jitter

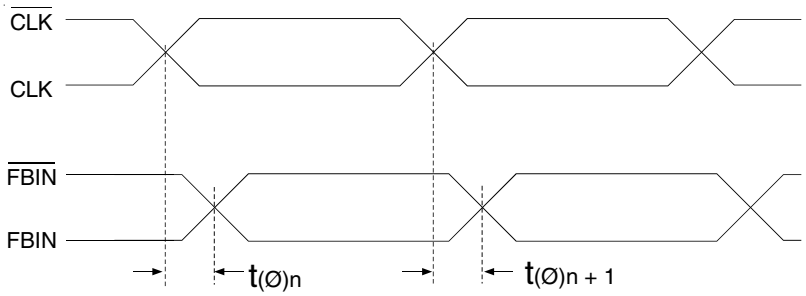

$$t_{(Ø)} = \frac{\sum_{1}^{n=N} t_{(Ø)n}}{N}$$

(N is a large number of samples)

Figure 4. Static Phase Offset


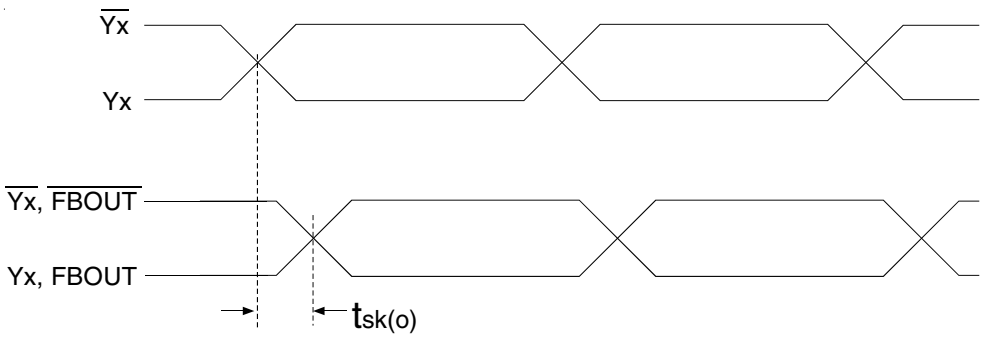


Figure 5. Output Skew


© 2019 Renesas Electronics Corporation

TEST CIRCUIT AND SWITCHING WAVEFORMS

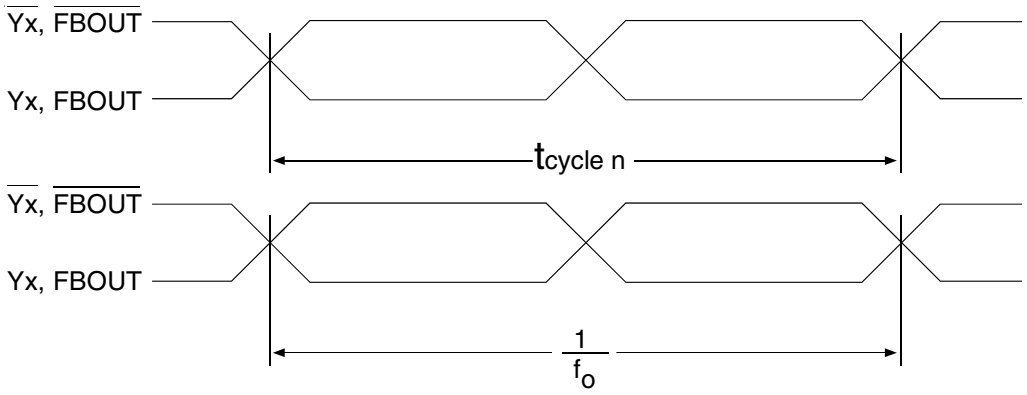

$$t_{jit(per)} = t_{cycle\ n} - \frac{1}{f_o}$$

Figure 6. Period jitter

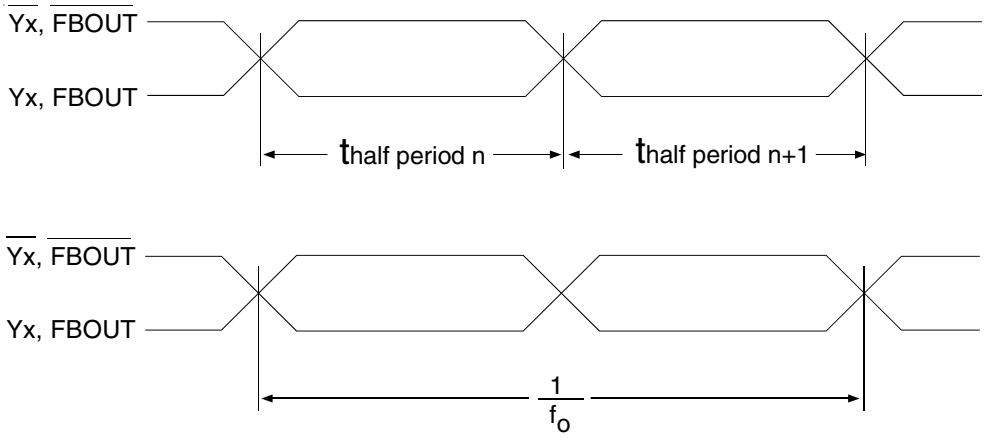

$$t_{jit(hper)} = t_{half\ period\ n} - \frac{1}{2*f_o}$$

Figure 7. Half-Period jitter

© 2019 Renesas Electronics Corporation

TEST CIRCUIT AND SWITCHING WAVEFORMS

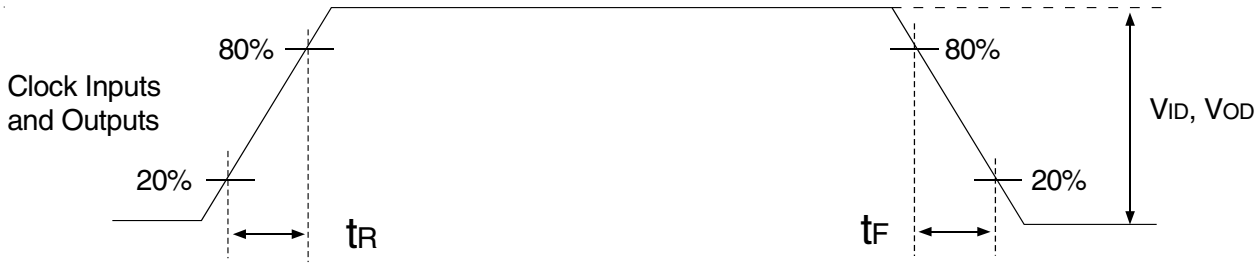


Figure 8. Input and Output Slew Rates

APPLICATION INFORMATION

Clock Structure	# of SDRAM Loads per Clock	Clock Loading on the PLL outputs (pF)	
		Min.	Max.
#1	2	4	7
#2	4	8	14

© 2019 Renesas Electronics Corporation

APPLICATION INFORMATION

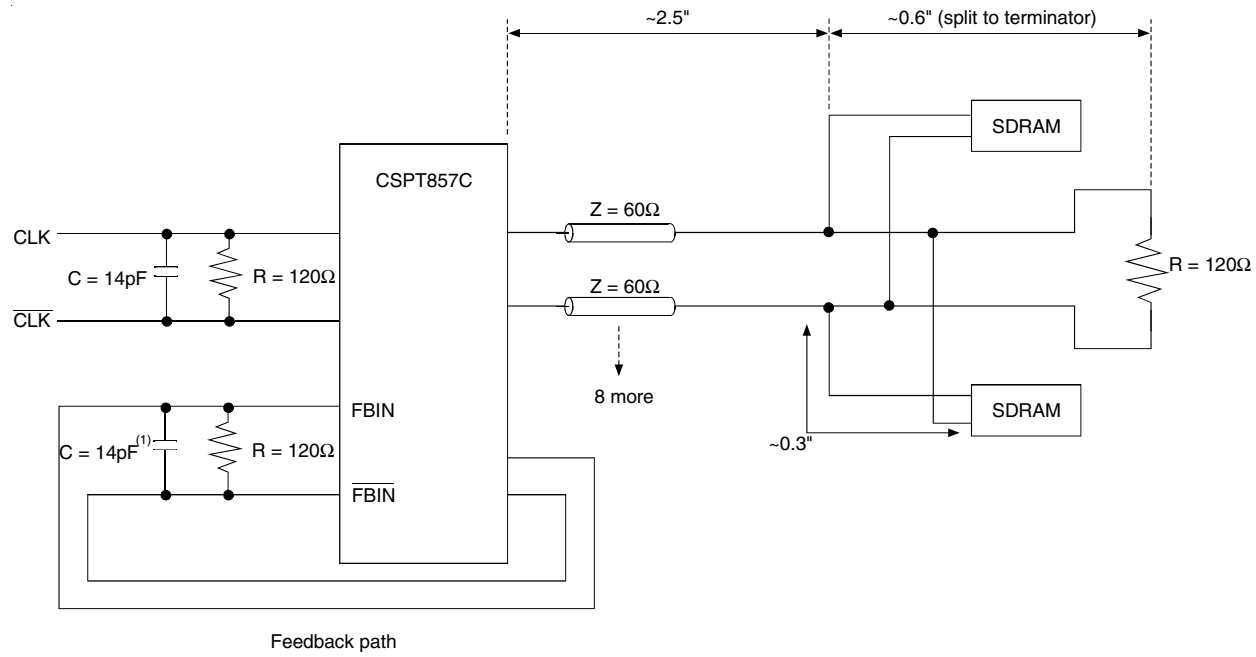


Figure 9. Clock Structure 1


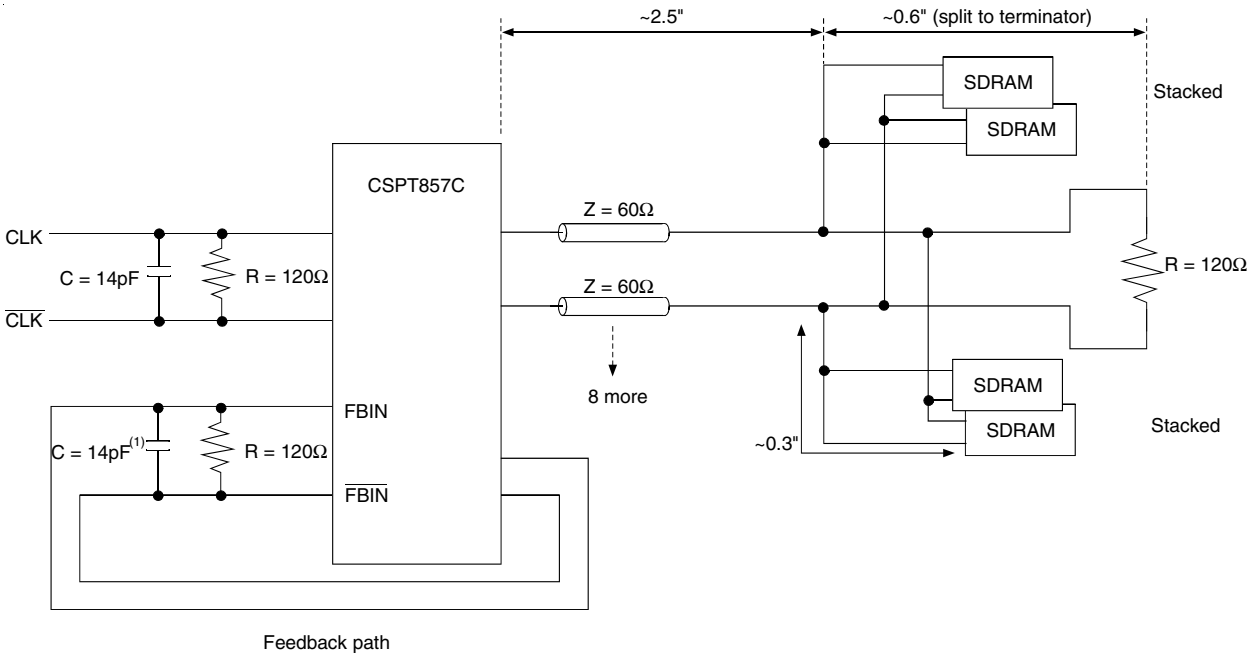


Figure 10. Clock Structure 2

NOTE:
1. Memory module vendors may need to adjust the feedback capacitive load in order to meet DDR SDRAM registered DIMM timing requirements.

© 2019 Renesas Electronics Corporation

ORDERING INFORMATION

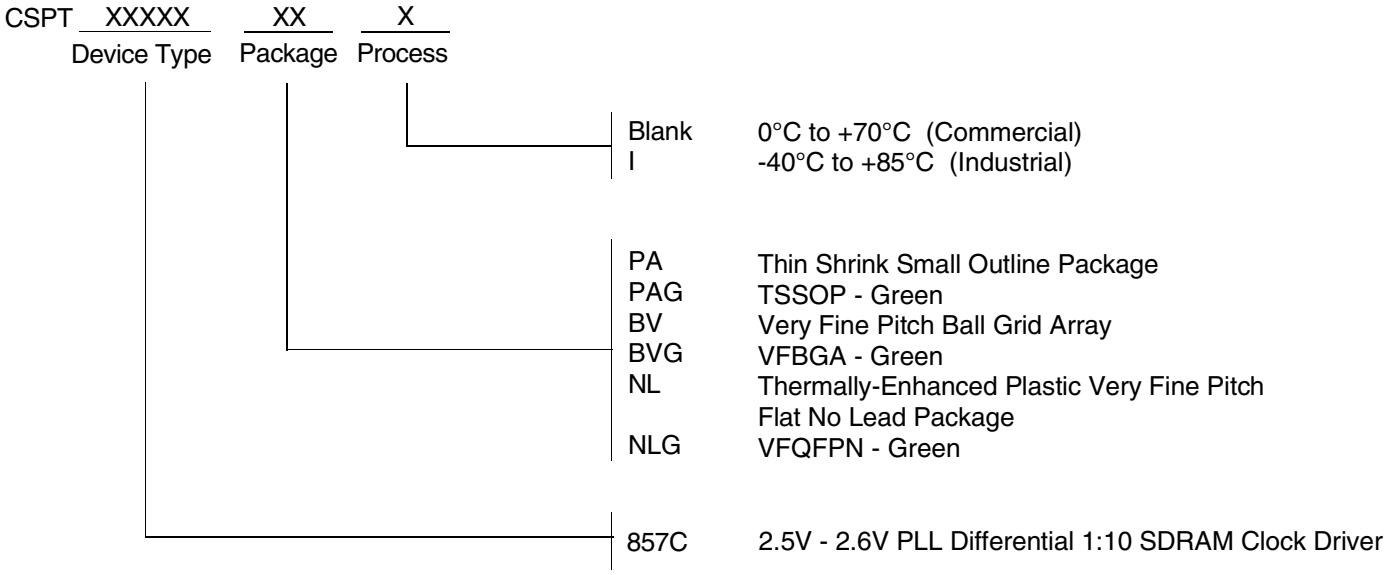

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

© 2020 Renesas Electronics Corporation. All rights reserved.