



光谱图

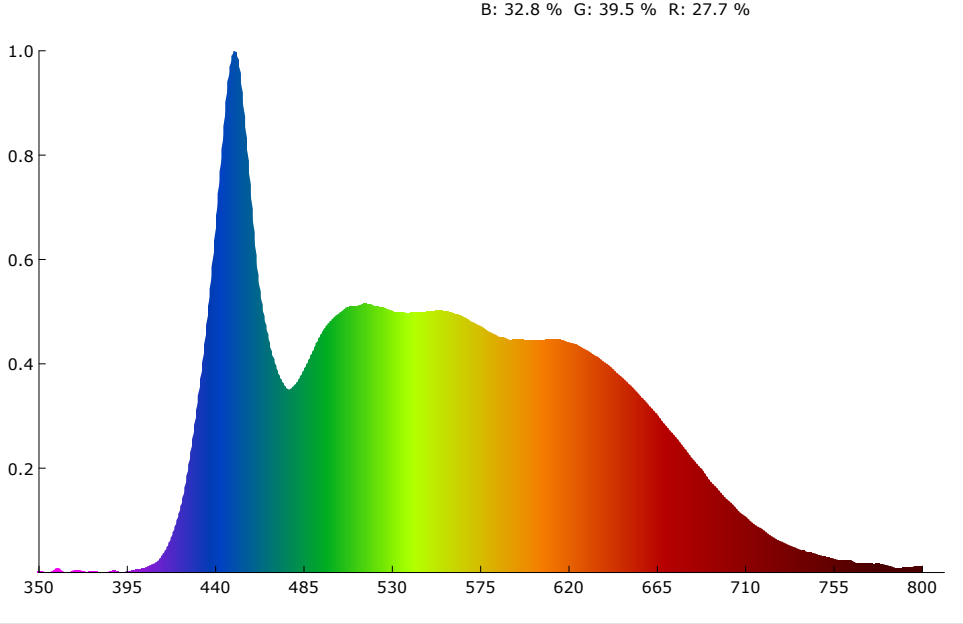

SDCM

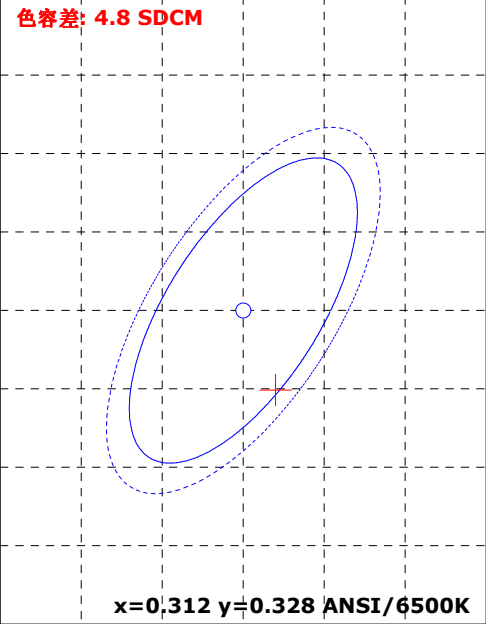

颜色参数:

坐标x: 0.3143 坐标y: 0.3231 坐标u: 0.2012 坐标v: 0.3102 坐标u': 0.2012 坐标v': 0.4653
红色比: 27.7 % 绿色比: 39.5 % 蓝色比: 32.8 % 光通量红色比: 15.2 % 光通量绿色比: 80.4 % 光通量蓝色比: 4.4 %


显色指数: 96.2 AvgR: 94.8
R1: 97.4 R2: 96.6 R3: 94.0 R4: 96.1 R5: 97.9 R6: 93.7 R7: 97.1 R8: 97.1
R9: 90.9 R10: 91.9 R11: 94.8 R12: 80.5 R13: 97.8 R14: 96.6 R15: 99.1

色温: 6466 K 光通量: 2629.323 lm 峰值波长: 449.6 nm 色容差: 4.8
明暗视觉比: 2.4 中心波长: 450.6 nm 主波长: 484.5 nm 质心波长: 551.3 nm
半宽度: 27.8 nm 色偏差: -0.00072 色纯度: 7.2 % 色质指数: 91.6
LER(TM-30): 270.0 辐射功率: 9739.9 mw 色域指数(Rg): 101.6 逼真度(Rf): 92.6
红光辐射功率: 2599.8 mw 近红辐射功率: 328.4 mw 远红辐射功率: 18.8 mw







电参数:

光效: 28.0 Lm/W 能效: 30.5 能效等级: G
电压: 219.0 V 电流: 0.676 A 功率: 93.930 W 功率因素: 0.633

Rf: 92.6 CCT: 6466K u': 0.2012
Rg: 101.6 LER: 270.0 Duv: -0.00072 v': 0.4653



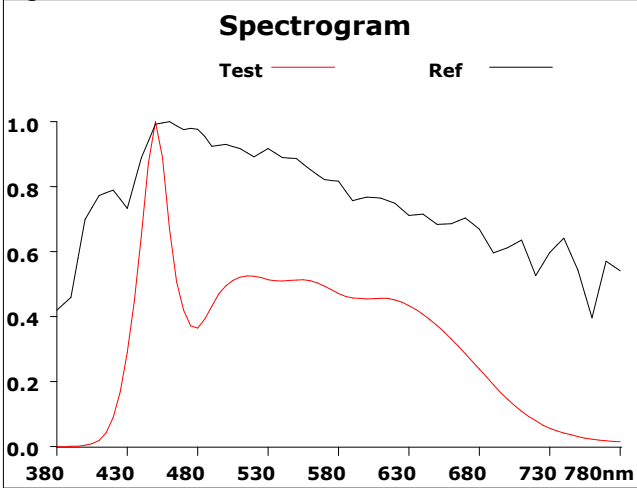


500			
Hue Bin	Rf	Chroma	Hue
1	94.1	-1.7%	-0.5%
2	95.8	-1.1%	1.5%
3	92.9	-0.4%	3.0%
4	93.3	0.0%	2.7%
5	92.4	-0.5%	1.4%
6	96.3	1.4%	0.7%
7	97.6	0.6%	-0.0%
8	95.8	-1.2%	1.2%
9	93.2	-2.1%	4.7%
10	86.9	-1.2%	7.2%
11	84.3	2.1%	8.7%
12	92.4	2.4%	3.9%
13	93.3	5.0%	1.4%
14	93.4	3.3%	-0.4%
15	86.1	8.9%	-7.9%
16	96.6	0.2%	-1.6%

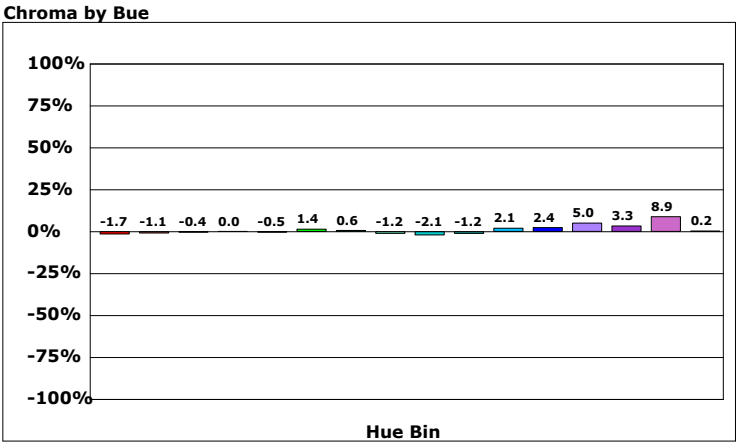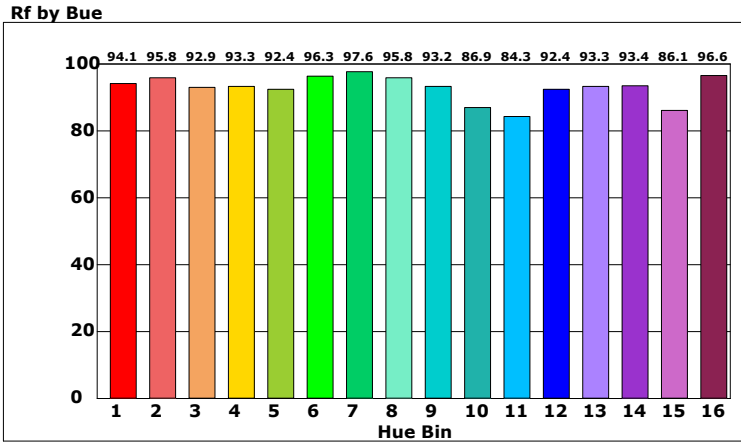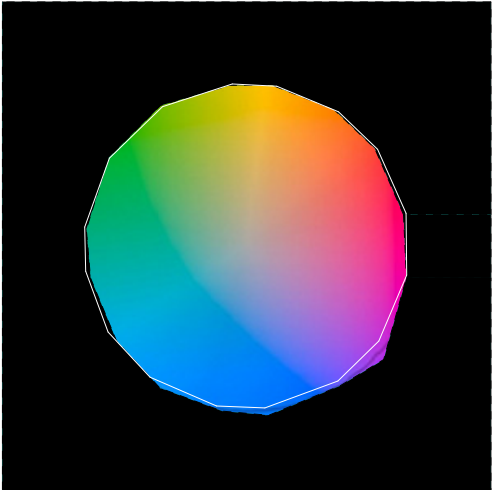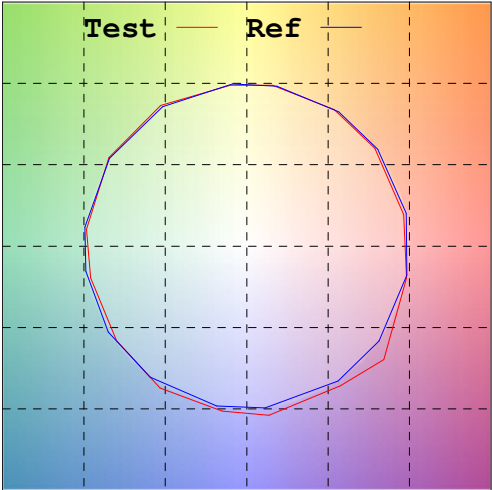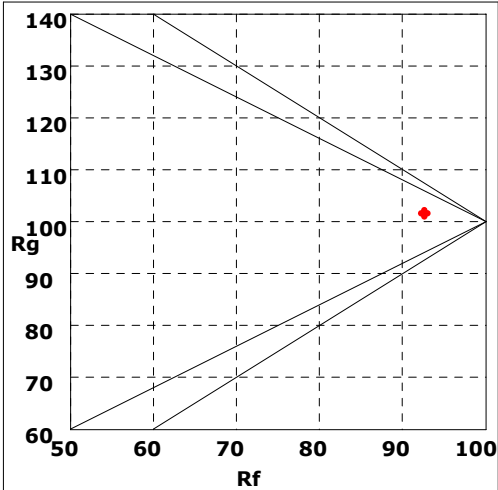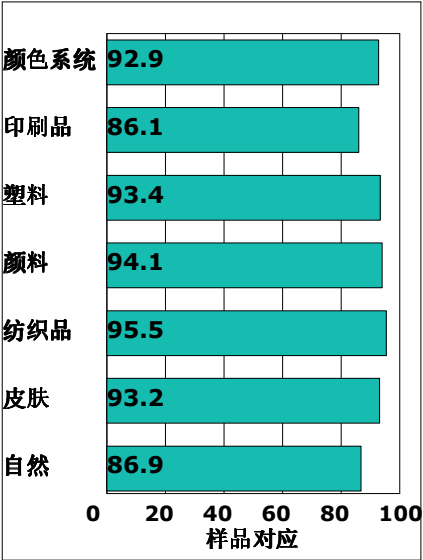


产品型号:P19
产品编号:
测试人员:
备注:


制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:12/14/12

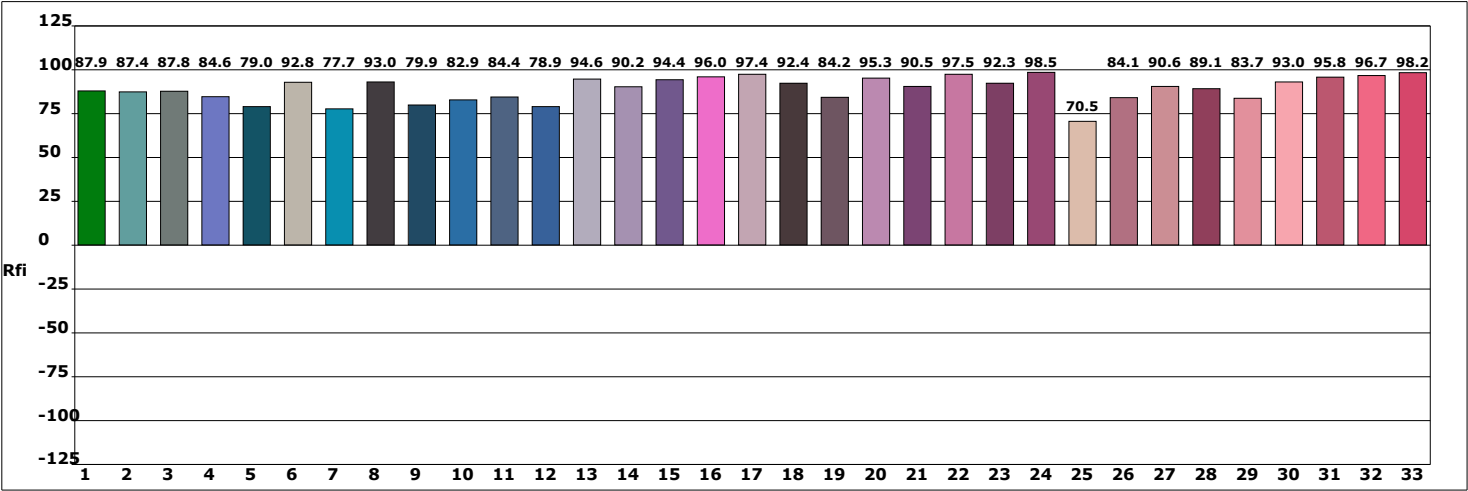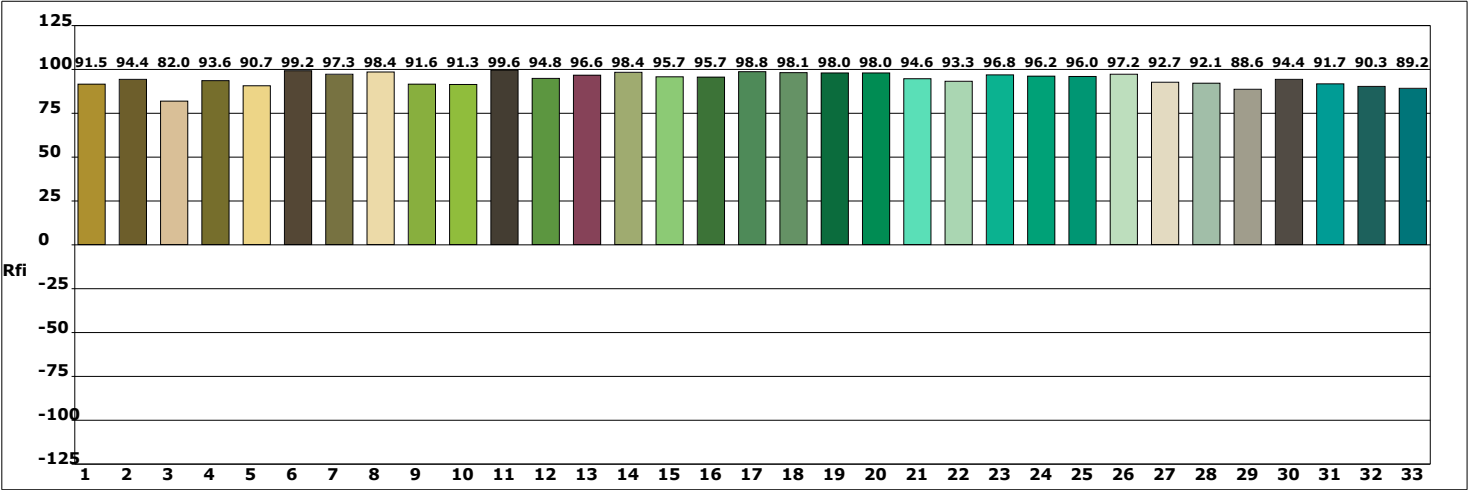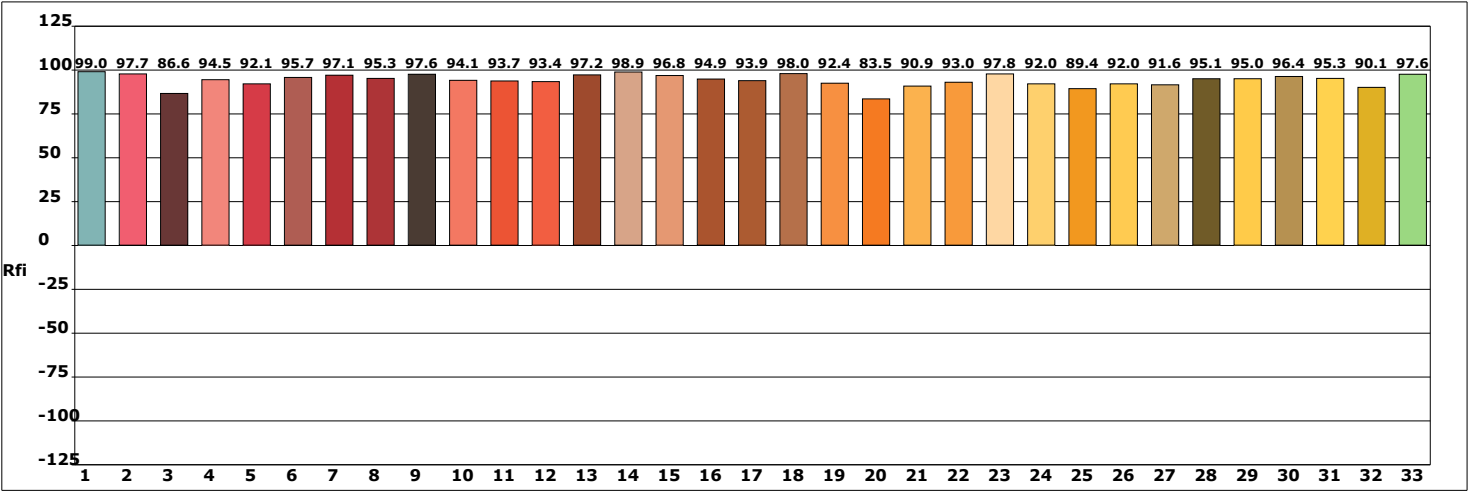

光谱图

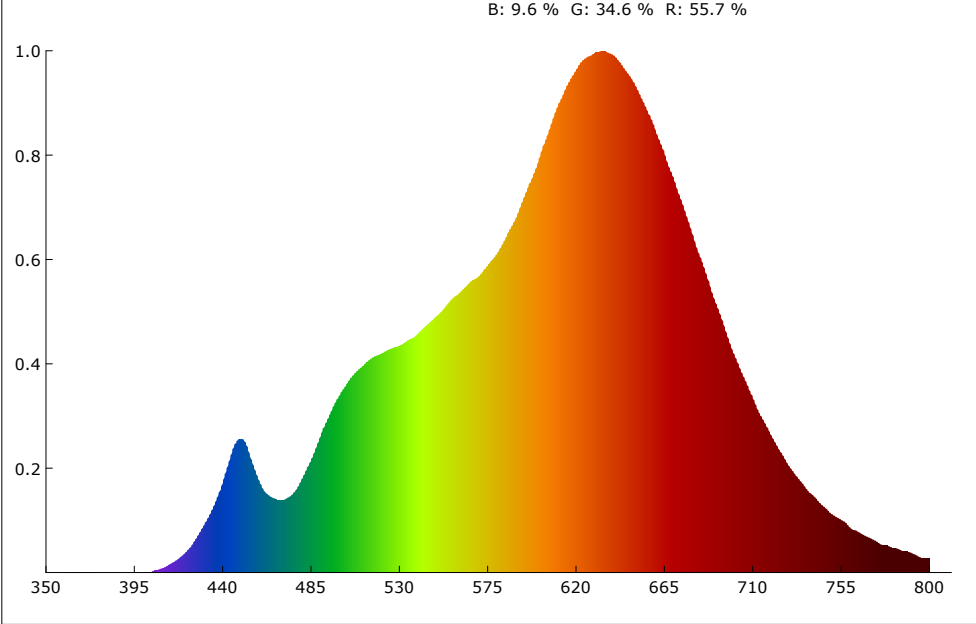

SDCM

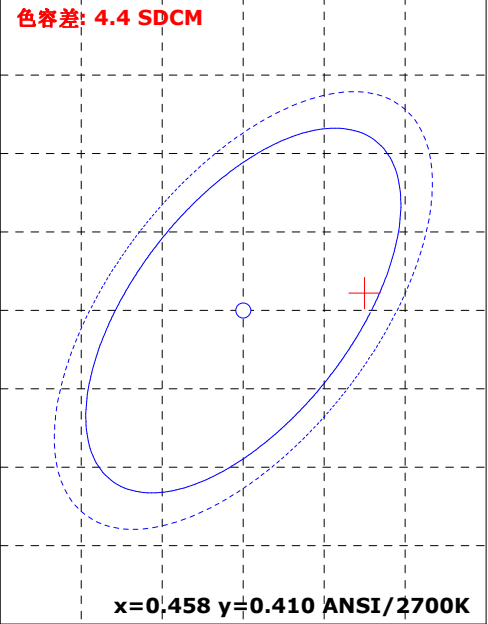

颜色参数:

坐标x: 0.4653 坐标y: 0.4112 坐标u: 0.2657 坐标v: 0.3523 坐标u': 0.2657 坐标v': 0.5285
红色比: 55.7 % 绿色比: 34.6 % 蓝色比: 9.6 % 光通量红色比: 27.3 % 光通量绿色比: 71.2 % 光通量蓝色比: 1.4 %


显色指数: 96.7 AvgR: 96.0
R1: 97.2 R2: 98.5 R3: 98.8 R4: 94.7 R5: 96.3 R6: 94.7 R7: 97.5 R8: 96.2
R9: 91.0 R10: 96.8 R11: 89.8 R12: 94.5 R13: 97.1 R14: 98.3 R15: 99.0

色温: 2631 K 光通量: 2094.007 lm 峰值波长: 634.5 nm 色容差: 4.4
明暗视觉比: 1.3 中心波长: 622.2 nm 主波长: 584.6 nm 质心波长: 609.2 nm
半宽度: 140.8 nm 色偏差: -0.00016 色纯度: 63.1 % 色质指数: 92.6
LER(TM-30): 254.3 辐射功率: 8235.3 mw 色域指数(Rg): 101.8 逼真度(Rf): 95.6
红光辐射功率: 4164.4 mw 近红辐射功率: 724.7 mw 远红辐射功率: 40.7 mw




电参数:

光效: 22.5 Lm/W 能效: 24.5 能效等级: G
电压: 220.1 V 电流: 0.664 A 功率: 92.890 W 功率因素: 0.635


Rf: 95.6 CCT: 2631K u': 0.2657
Rg: 101.8 LER: 254.3 Duv: -0.00016 v': 0.5285

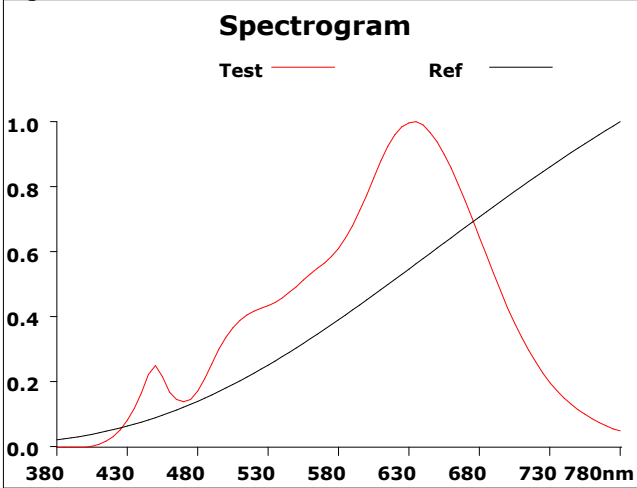


500			
Hue Bin	Rf	Chroma	Hue
1	96.5	-0.7%	-0.6%
2	97.5	0.1%	-0.2%
3	96.2	0.3%	-0.1%
4	96.7	0.1%	-0.8%
5	97.6	0.4%	1.1%
6	95.0	2.5%	2.2%
7	96.5	1.9%	-0.1%
8	94.1	3.4%	-0.4%
9	95.4	1.7%	-1.6%
10	95.1	1.3%	-2.4%
11	96.8	1.2%	-1.2%
12	92.7	1.8%	-4.0%
13	92.6	1.3%	-5.1%
14	93.2	1.1%	-4.8%
15	96.3	-0.2%	-1.7%
16	93.0	-0.4%	-4.5%

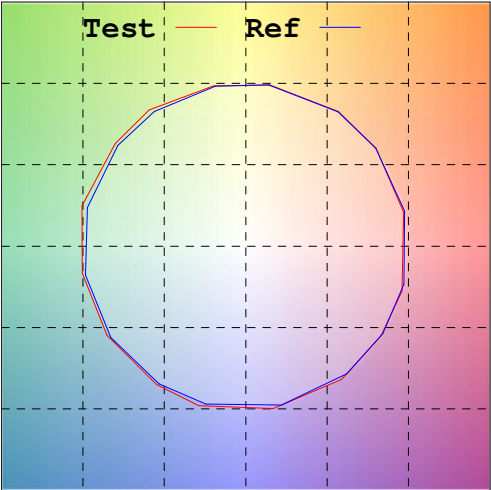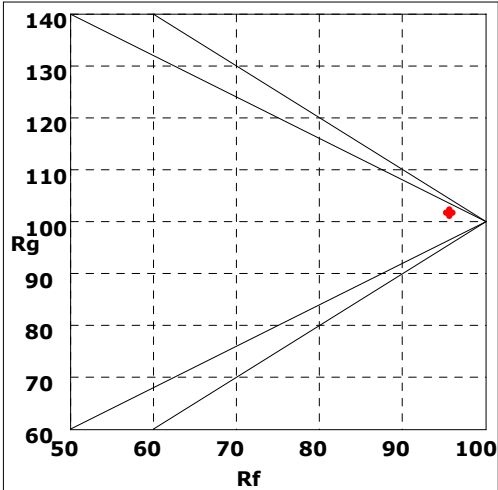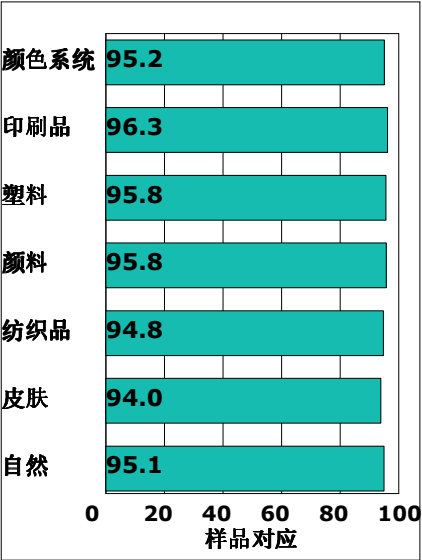

Rf by Bue



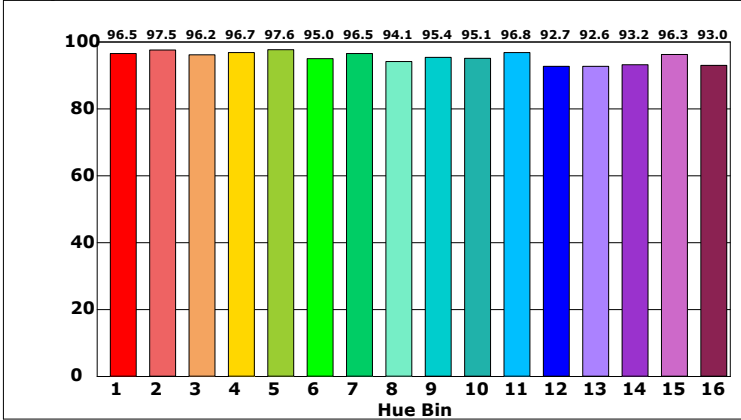


Chroma by Bue

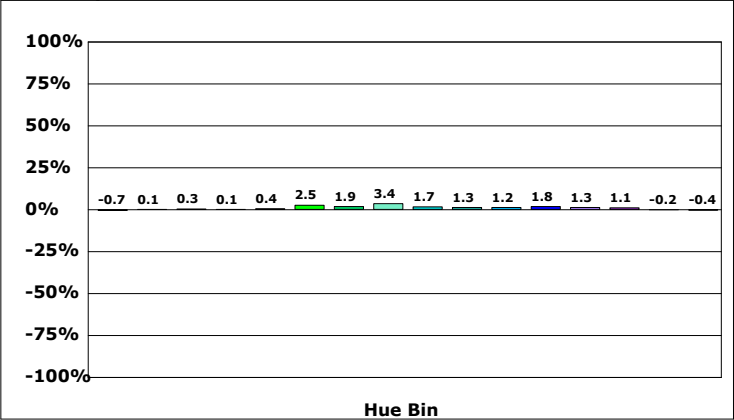


产品型号:P19
产品编号:
测试人员:
备注:


制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:12/14/12

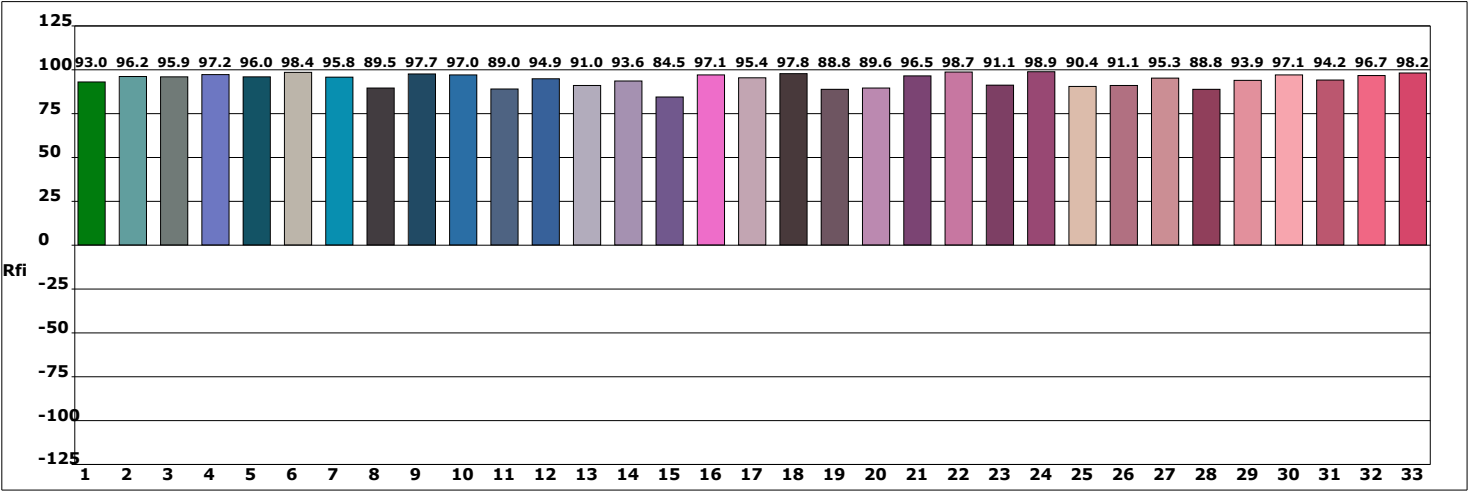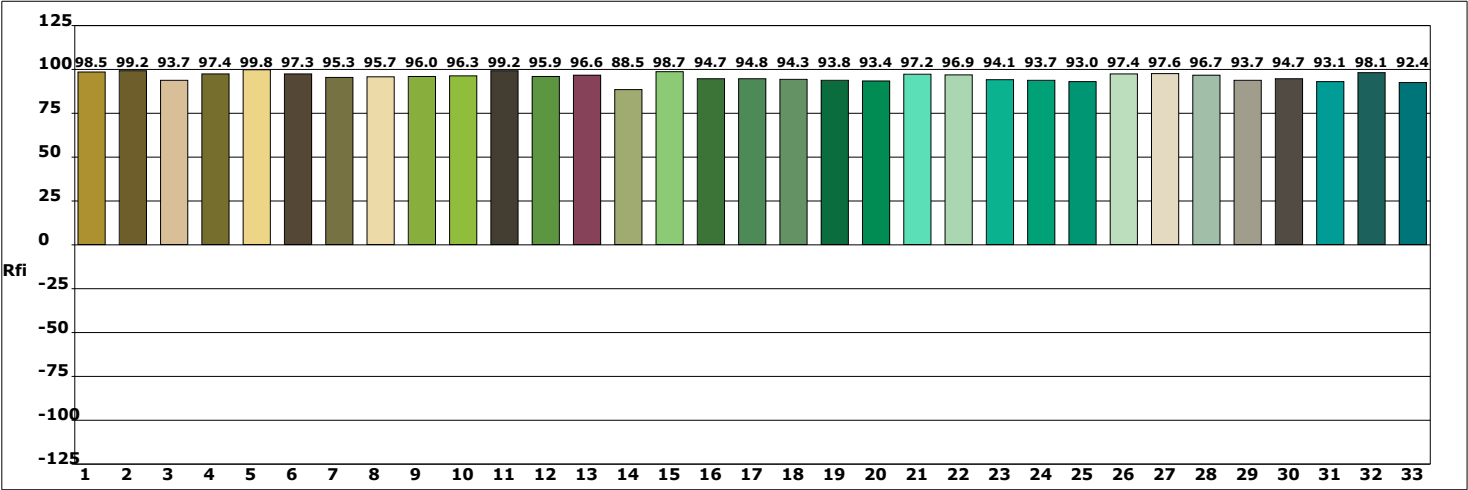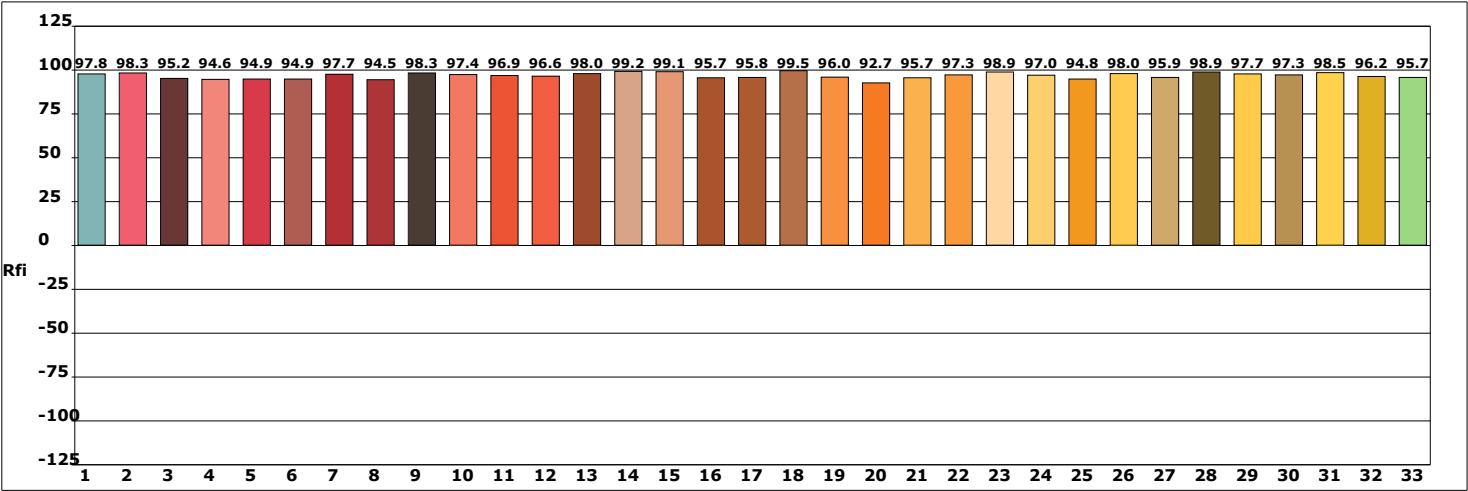

光谱图

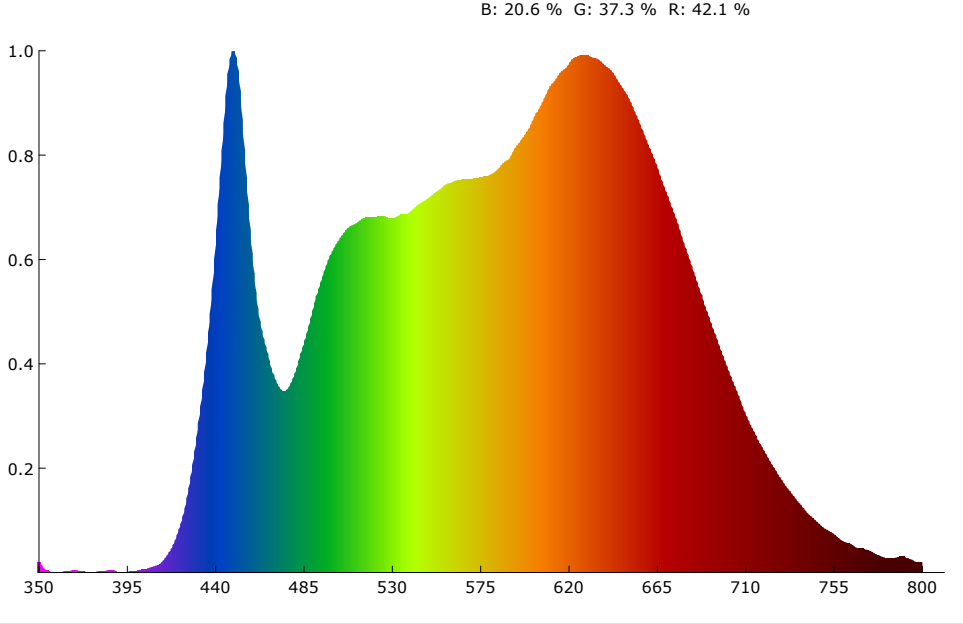

SDCM

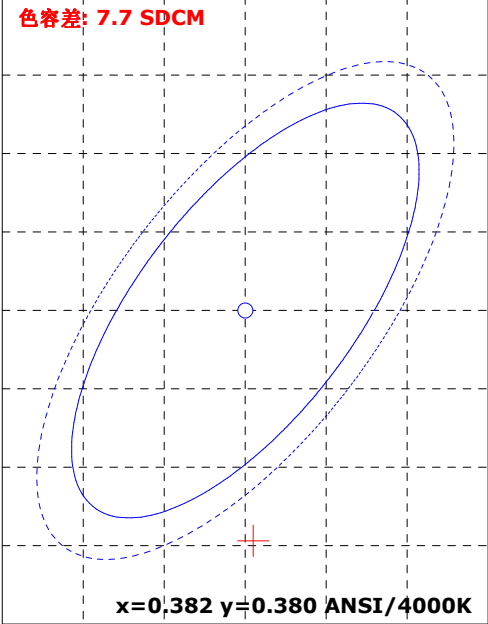

颜色参数:

坐标x: 0.3823 坐标y: 0.3650 坐标u: 0.2312 坐标v: 0.3310 坐标u': 0.2312 坐标v': 0.4965
红色比: 42.1 % 绿色比: 37.3 % 蓝色比: 20.6 % 光通量红色比: 21.2 % 光通量绿色比: 76.0 % 光通量蓝色比: 2.8 %


显色指数: 95.6 AvgR: 94.5
R1: 94.9 R2: 97.4 R3: 96.5 R4: 92.6 R5: 94.7 R6: 95.2 R7: 98.0 R8: 96.1
R9: 90.1 R10: 95.7 R11: 89.3 R12: 90.3 R13: 95.4 R14: 97.4 R15: 94.3

色温: 3856 K 光通量: 1922.170 lm 峰值波长: 449.6 nm 色容差: 7.7
明暗视觉比: 1.8 中心波长: 450.0 nm 主波长: 583.5 nm 质心波长: 581.5 nm
半宽度: 24.1 nm 色偏差: -0.00621 色纯度: 24.3 % 色质指数: 89.4
LER(TM-30): 263.9 辐射功率: 7284.1 mw 色域指数(Rg): 104.6 逼真度(Rf): 94.5
红光辐射功率: 2876.4 mw 近红辐射功率: 429.7 mw 远红辐射功率: 19.9 mw

电参数:

光效: 28.0 Lm/W 能效: 30.5 能效等级: G
电压: 220.3 V 电流: 0.504 A 功率: 68.530 W 功率因素: 0.617

Rf: 94.5 CCT: 3856K u': 0.2312
Rg: 104.6 LER: 263.9 Duv: -0.00621 v': 0.4965

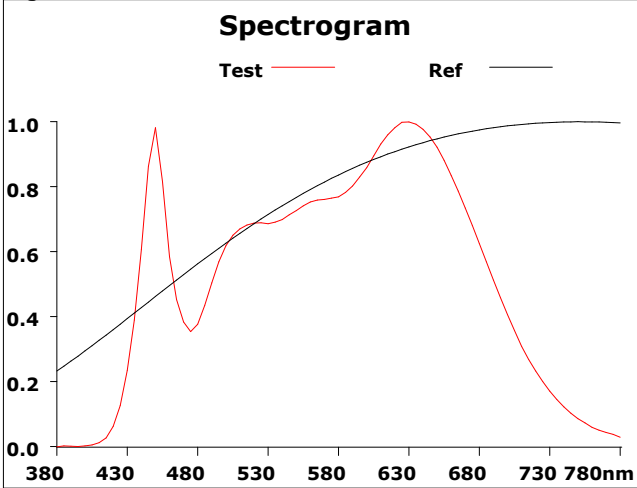

500			
Hue Bin	Rf	Chroma	Hue
1	96.3	1.0%	-0.6%
2	97.1	1.0%	-0.1%
3	95.5	1.2%	1.5%
4	96.6	0.4%	0.7%
5	94.1	0.6%	1.3%
6	93.9	3.7%	1.3%
7	95.0	2.8%	0.3%
8	94.1	2.2%	0.3%
9	95.4	1.5%	0.9%
10	97.3	0.2%	0.4%
11	91.3	2.4%	4.7%
12	90.9	3.7%	2.9%
13	96.0	2.5%	0.3%
14	91.2	7.6%	-0.5%
15	92.8	3.4%	-1.2%
16	90.2	3.6%	-4.3%

