


光谱图

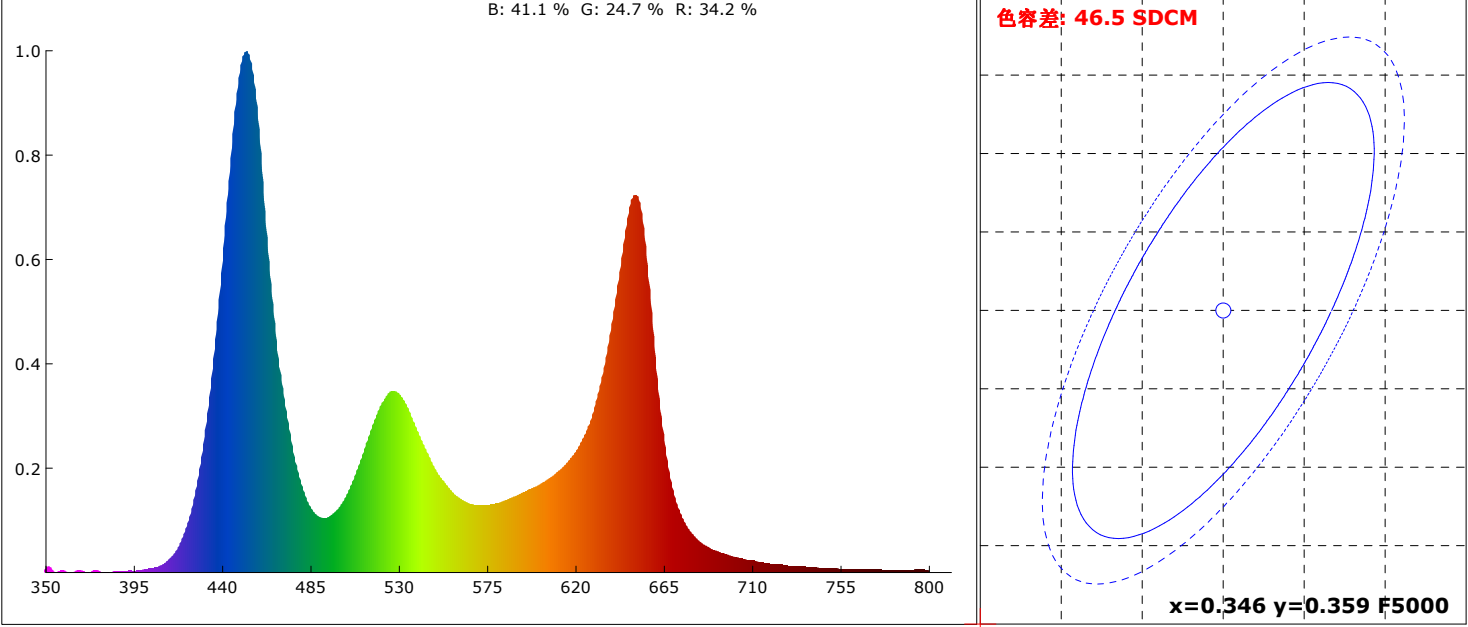

颜色参数:

坐标x: 0.2781 坐标y: 0.2251 坐标u: 0.2162 坐标v: 0.2625 坐标u': 0.2162 坐标v': 0.3937
红色比: 34.2 % 绿色比: 24.7 % 蓝色比: 41.1 % 光通量红色比: 21.7 % 光通量绿色比: 71.0 % 光通量蓝色比: 7.3 %

显色指数: 45.4 AvgR: 34.1
R1: 29.3 R2: 71.4 R3: 51.2 R4: 31.0 R5: 47.0 R6: 76.1 R7: 64.2 R8: -6.3
R9: -99.0 R10: 55.6 R11: 19.5 R12: 64.7 R13: 37.8 R14: 67.5 R15: 1.4


色温: 29276 K 光通量: 3618.974 lm 峰值波长: 453.3 nm 色容差: 46.5
明暗视觉比: 3.0 中心波长: 452.5 nm 主波长: 433.8 nm 质心波长: 543.5 nm
半宽度: 28.0 nm 色偏差: -0.03523 色纯度: 33.3 % 色质指数: 81.6
LER(TM-30): 193.6 辐射功率: 18692.1 mw 色域指数(Rg): 124.3 逼真度(Rf): 58.8
红光辐射功率: 6284.3 mw 近红辐射功率: 239.2 mw 远红辐射功率: 27.8 mw

电参数:





光效: 8.4 Lm/W 能效: 9.2 能效等级: G
电压: 218.1 V 电流: 2.641 A 功率: 430.100 W 功率因素: 0.747

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:05/30/14
备注:


Rf: 58.8 CCT: 29276K u': 0.2162
Rg: 124.3 LER: 193.6 Duv: -0.03523 v': 0.3937

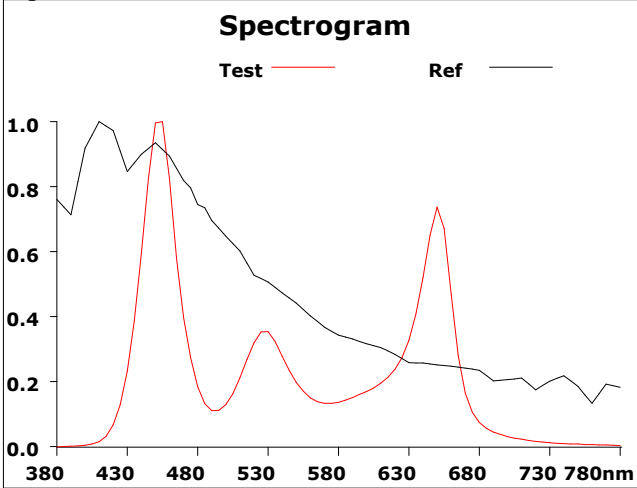

500			
Hue Bin	Rf	Chroma	Hue
1	28.8	36.3%	6.0%
2	56.5	17.1%	-4.0%
3	60.2	15.1%	-14.0%
4	74.7	6.5%	-1.5%
5	73.9	-0.2%	5.1%
6	72.7	6.9%	12.5%
7	65.0	1.9%	9.5%
8	67.6	11.6%	15.7%
9	69.7	8.5%	10.1%
10	75.4	1.8%	18.0%
11	54.6	2.1%	19.8%
12	47.4	-8.5%	41.8%
13	34.5	-2.6%	40.0%
14	27.0	9.7%	44.2%
15	24.4	42.6%	49.7%
16	42.4	21.1%	16.3%

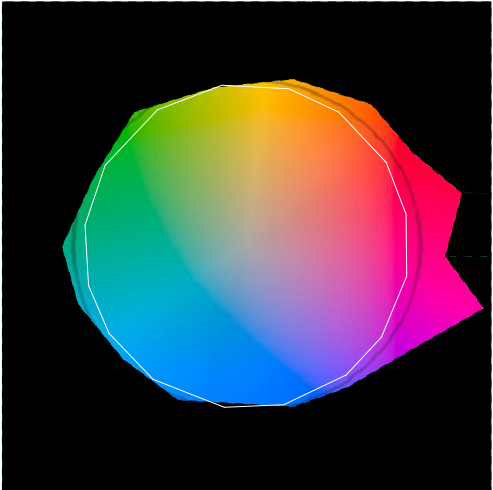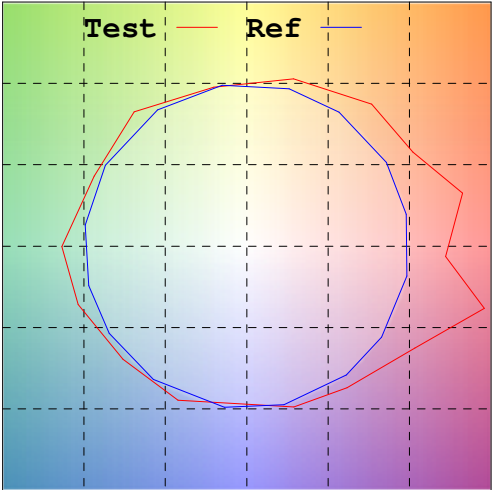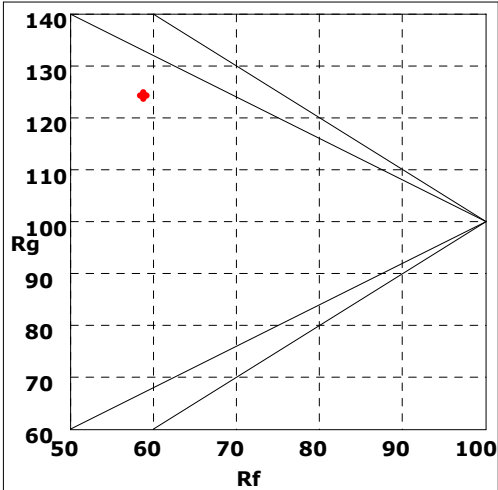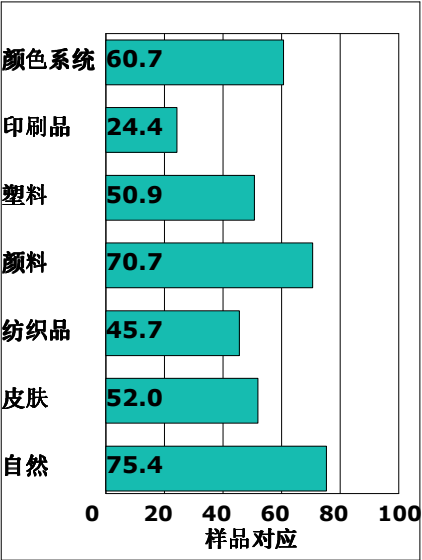

Rf by Bue

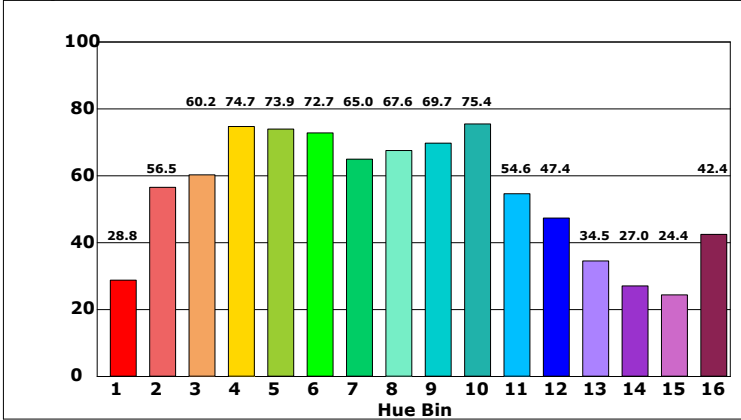

Chroma by Bue

