



光谱图

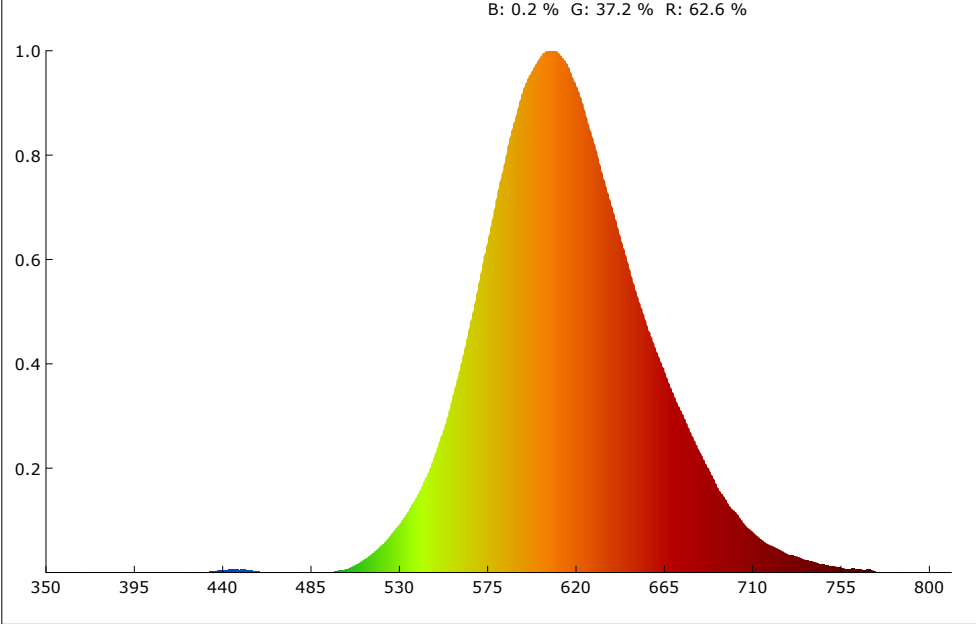

SDCM

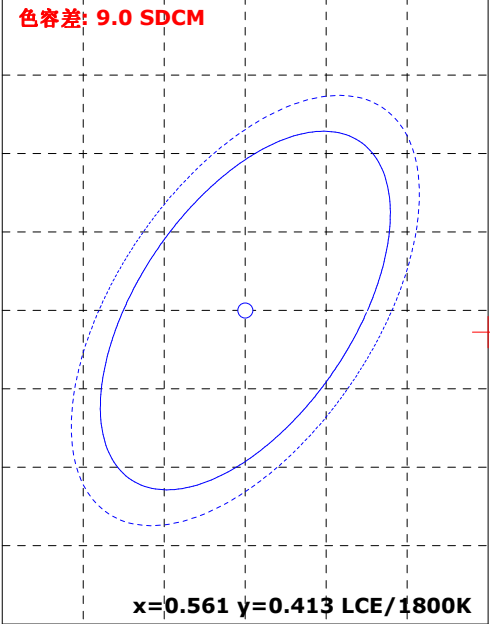

颜色参数:

坐标x: 0.5767 坐标y: 0.4186 坐标u: 0.3358 坐标v: 0.3656 坐标u': 0.3358 坐标v': 0.5484
红色比: 62.6 % 绿色比: 37.2 % 蓝色比: 0.2 % 光通量红色比: 34.4 % 光通量绿色比: 65.6 % 光通量蓝色比: 0.0 %

显色指数: 51.7 AvgR: 40.3
R1: 44.5 R2: 73.0 R3: 88.3 R4: 33.1 R5: 38.8 R6: 63.4 R7: 62.6 R8: 10.4
R9: -72.6 R10: 46.6 R11: 13.7 R12: 23.5 R13: 47.1 R14: 94.0 R15: 37.4


色温: 1679 K 光通量: 1225.362 lm 峰值波长: 609.7 nm 色容差: 9.0
明暗视觉比: 0.4 中心波长: 611.0 nm 主波长: 590.8 nm 质心波长: 615.2 nm
半宽度: 85.8 nm 色偏差: 0.00511 色纯度: 98.8 % 色质指数: 24.9
LER(TM-30): 325.8 辐射功率: 3760.7 mw 色域指数(Rg): 37.6 逼真度(Rf): 38.6
红光辐射功率: 2288.6 mw 近红辐射功率: 104.1 mw 远红辐射功率: 0.5 mw

电参数:






光效: 11.5 Lm/W 能效: 12.5 能效等级: G
电压: 219.6 V 电流: 0.743 A 功率: 106.700 W 功率因素: 0.653

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:05/30/14
备注:

Rf: 38.6 CCT: 1679K u': 0.3358
Rg: 37.6 LER: 325.8 Duv: 0.00511 v': 0.5484

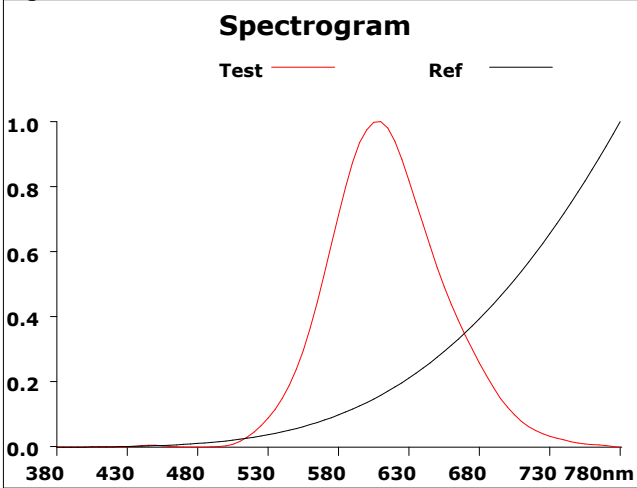

500			
Hue Bin	Rf	Chroma	Hue
1	38.0	-26.0%	-13.2%
2	24.9	-34.6%	-19.7%
3	4.1	-50.7%	-18.8%
4	32.9	-57.0%	-7.0%
5	56.7	-53.8%	9.3%
6	41.2	-37.9%	23.1%
7	35.9	-32.7%	15.3%
8	53.6	-31.7%	1.8%
9	41.2	-24.8%	-12.9%
10	34.6	-36.8%	-12.1%
11	27.1	-39.1%	-0.6%
12	22.6	-40.7%	13.5%
13	47.3	-42.4%	12.3%
14	52.9	-40.2%	2.5%
15	59.0	-24.5%	6.1%
16	55.1	-24.9%	-2.3%

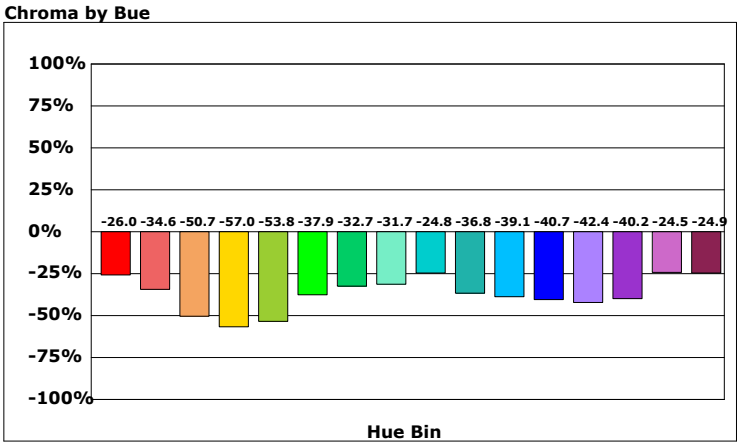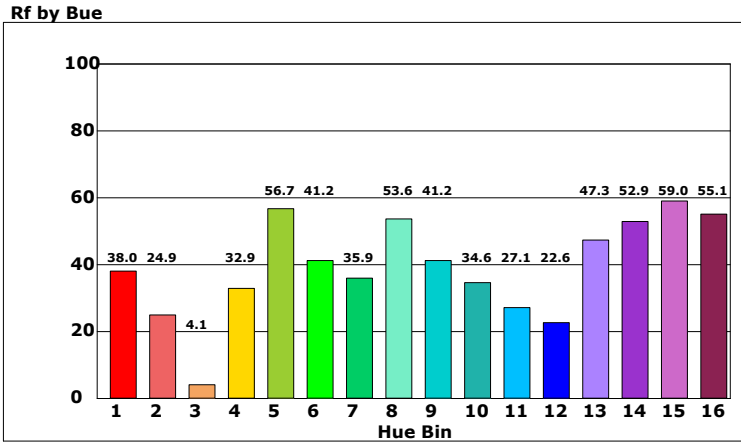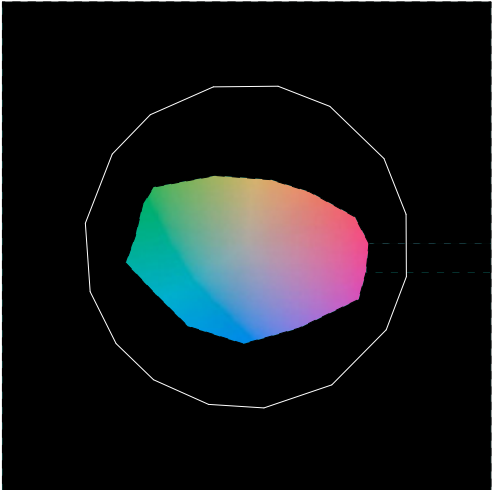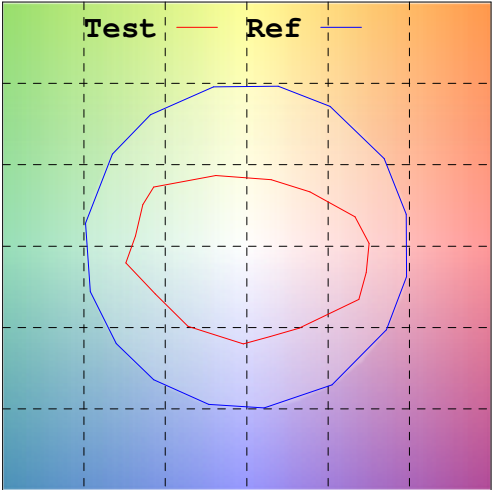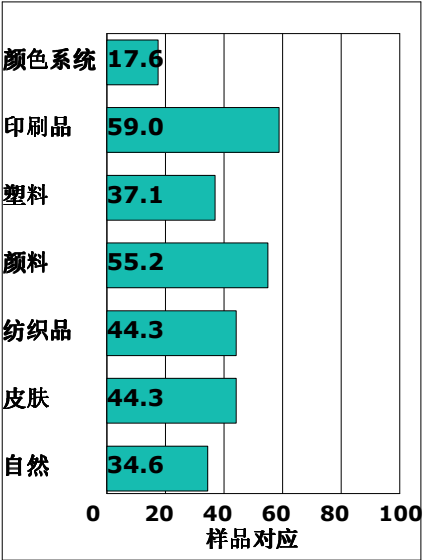

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:05/30/14
备注:

