



光谱图

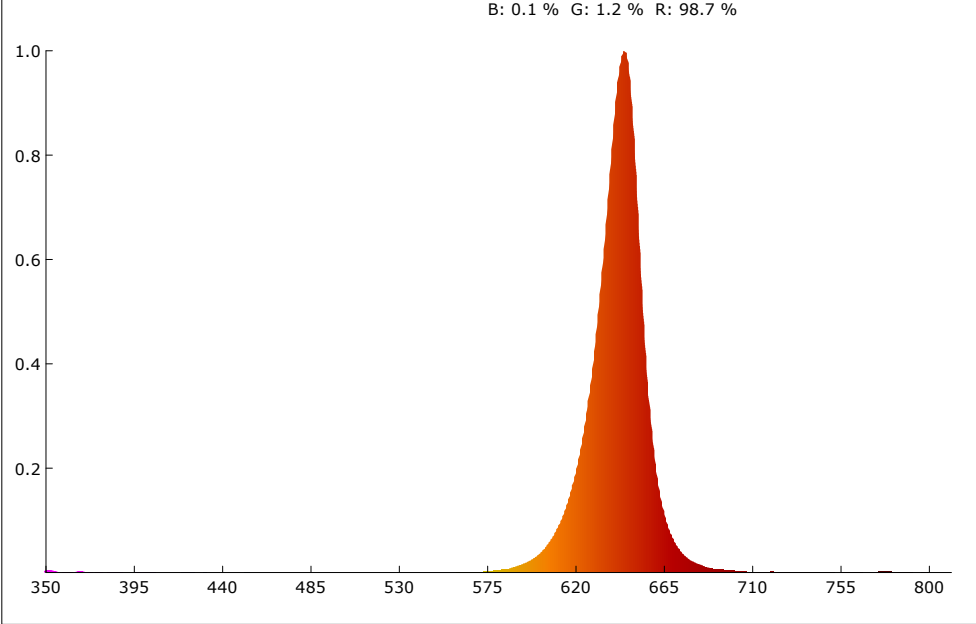

SDCM

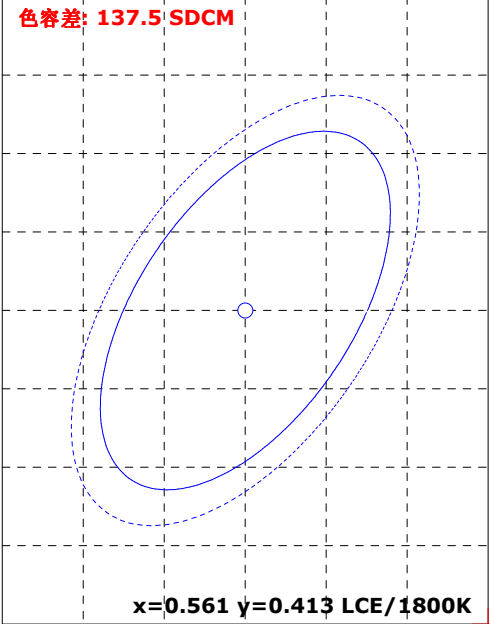

颜色参数:

坐标x: 0.7032 坐标y: 0.2947 坐标u: 0.5483 坐标v: 0.3447 坐标u': 0.5483 坐标v': 0.5171  
红色比: 98.7 % 绿色比: 1.2 % 蓝色比: 0.1 % 光通量红色比: 94.9 % 光通量绿色比: 5.1 % 光通量蓝色比: 0.0 %

显色指数: 29.4 AvgR: 25.3  
R1: 12.6 R2: 74.9 R3: 50.4 R4: -1.8 R5: 22.7 R6: 89.4 R7: 23.2 R8: -36.2  
R9: -99.0 R10: 70.1 R11: 7.3 R12: 79.8 R13: 31.0 R14: 70.1 R15: -14.4


色温: 1000 K 光通量: 800.089 lm 峰值波长: 645.3 nm 色容差: 137.5  
明暗视觉比: 0.1 中心波长: 643.1 nm 主波长: 628.2 nm 质心波长: 640.8 nm  
半宽度: 22.6 nm 色偏差: -0.03523 色纯度: 99.4 % 色质指数: -nan(ind)  
LER(TM-30): 125.9 辐射功率: 6357.3 mw 色域指数(Rg): 91.2 逼真度(Rf): 36.3  
红光辐射功率: 6218.9 mw 近红辐射功率: 31.4 mw 远红辐射功率: 6.8 mw

电参数:






光效: 7.6 Lm/W 能效: 8.3 能效等级: G  
电压: 219.4 V 电流: 0.736 A 功率: 105.400 W 功率因素: 0.652

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd  
产品编号: 测试单位:  
测试人员: 测试日期:05/30/14  
备注:

Rf: 36.3 CCT: 1000K u': 0.5483  
Rg: 91.2 LER: 125.9 Duv: 0.0181 v': 0.5171

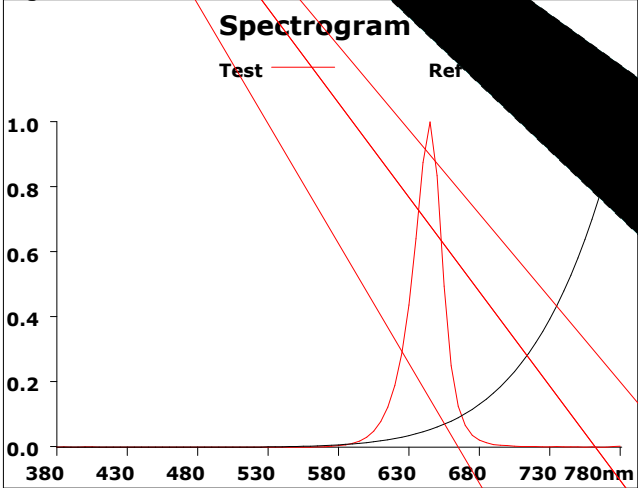

| 500     |       |        |            |
|---------|-------|--------|------------|
| Hue Bin | Rf    | Chroma | Hue        |
| 1       | 19.8  | -49.3% | 26.7%      |
| 2       | 51.3  | -30.7% | 71.2%      |
| 3       | 58.0  | 30.4%  | 114.1%     |
| 4       | 100.0 | nan%   | -nan(ind)% |
| 5       | 86.4  | 46.0%  | 20.3%      |
| 6       | 100.0 | nan%   | -nan(ind)% |
| 7       | 63.5  | 32.5%  | -2.3%      |
| 8       | 30.9  | -29.4% | -21.7%     |
| 9       | 15.4  | 13.2%  | 11.2%      |
| 10      | 13.7  | 0%     | 47.0%      |
| 11      | 58.0  | 45.8%  | 60.8%      |
| 12      | 45.8  | 34.9%  | 3.4%       |
| 13      | 34.9  | 67.0%  | 11.2%      |
| 14      | 67.0  | 86.9%  | 20.3%      |
| 15      | 86.9  | 42.6%  | -21.7%     |
| 16      | 42.6  | -21.7% | -21.7%     |

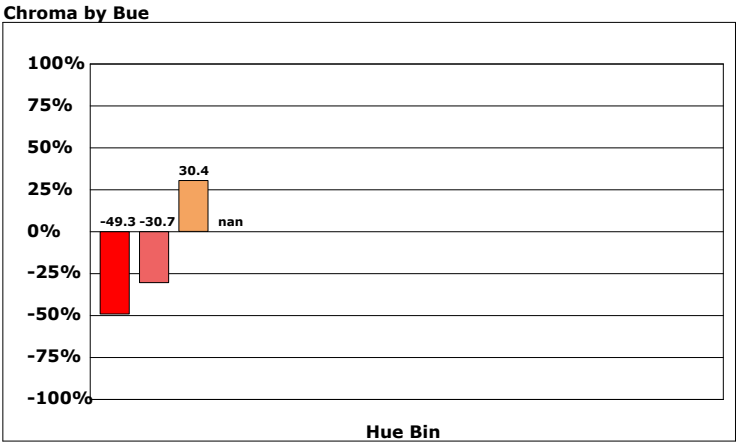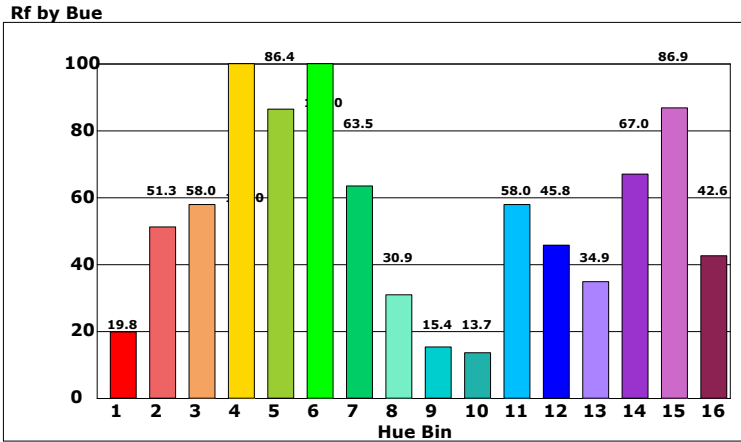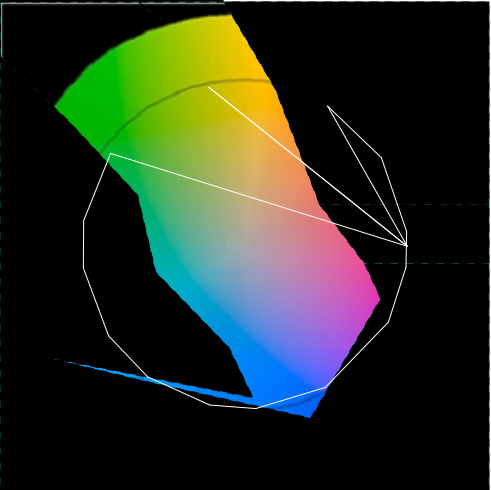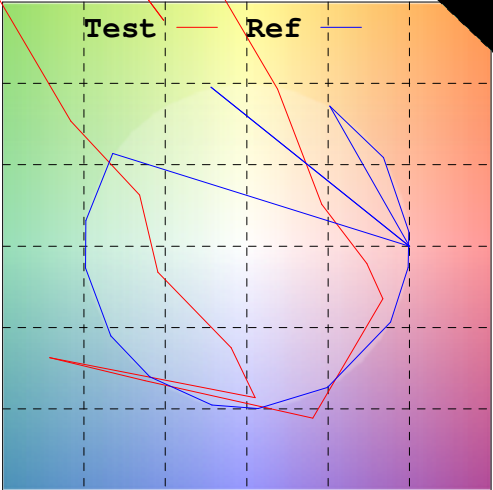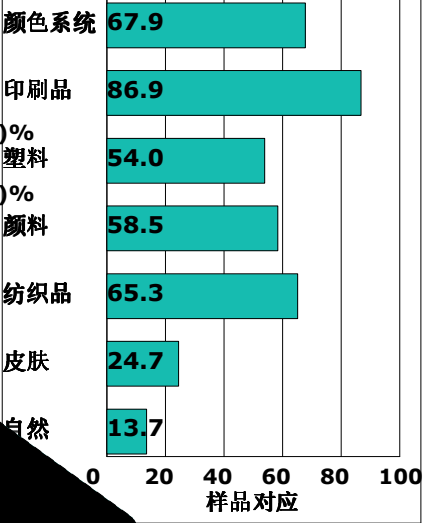

ERROR: undefined  
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010  
3173