



光谱图

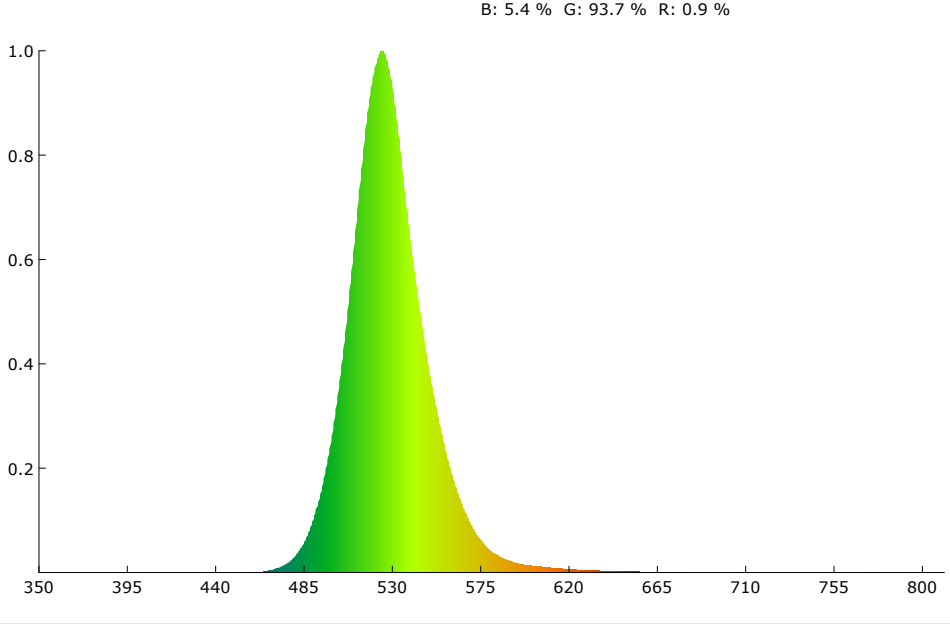

SDCM

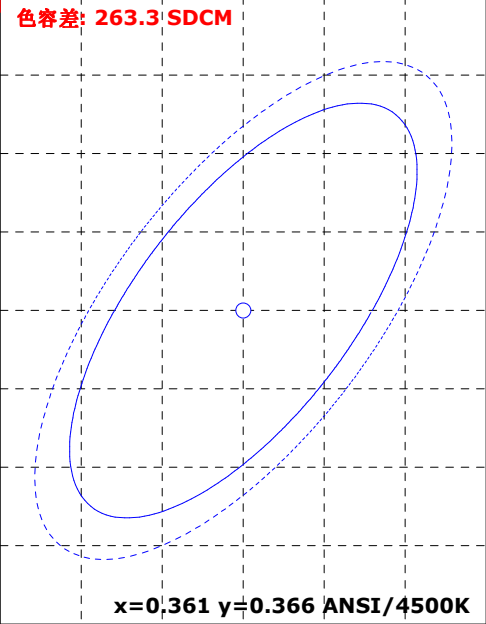

颜色参数:

坐标x: 0.1950 坐标y: 0.7220 坐标u: 0.0692 坐标v: 0.3842 坐标u': 0.0692 坐标v': 0.5763
红色比: 0.9 % 绿色比: 93.7 % 蓝色比: 5.4 % 光通量红色比: 0.4 % 光通量绿色比: 99.2 % 光通量蓝色比: 0.4 %

显色指数: -23.0 AvgR: -35.7
R1: -33.3 R2: -6.3 R3: -17.7 R4: -66.2 R5: -9.8 R6: -11.7 R7: -6.5 R8: -33.2
R9: -99.0 R10: -99.0 R11: -96.4 R12: -27.4 R13: -37.9 R14: 41.4 R15: -33.0


色温: 7453 K 光通量: 1832.883 lm 峰值波长: 525.5 nm 色容差: 263.3
明暗视觉比: 2.5 中心波长: 526.1 nm 主波长: 531.7 nm 质心波长: 529.4 nm
半宽度: 36.6 nm 色偏差: 0.15016 色纯度: 83.7 % 色质指数: 0.4
LER(TM-30): 514.9 辐射功率: 3559.8 mw 色域指数(Rg): 8.4 逼真度(Rf): 1.0
红光辐射功率: 33.5 mw 近红辐射功率: 1.1 mw 远红辐射功率: 0.0 mw

电参数:



光效: 16.8 Lm/W 能效: 18.3 能效等级: G
电压: 219.6 V 电流: 0.757 A 功率: 109.000 W 功率因素: 0.654

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:05/30/14
备注:


Rf: 1.0 CCT: 7453K u': 0.0692
Rg: 8.4 LER: 514.9 Duv: 0.15016 v': 0.5763

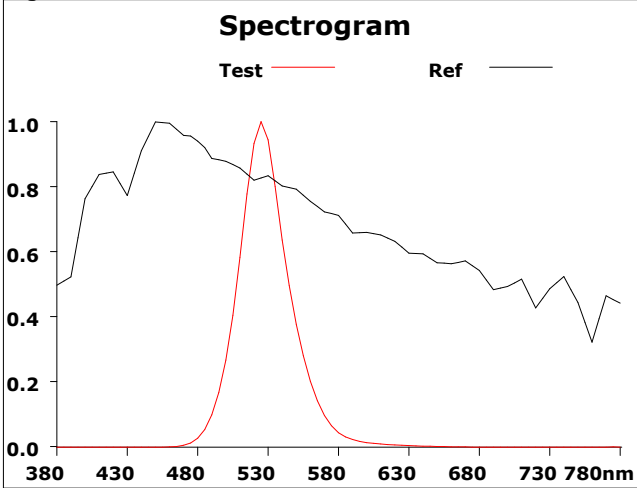

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-81.2%	2.6%
2	0.0	-68.1%	4.7%
3	0.3	-74.3%	-4.2%
4	3.0	-60.3%	-7.4%
5	0.9	-74.7%	-0.4%
6	0.4	-83.7%	5.0%
7	0.3	-77.3%	17.2%
8	0.0	-77.5%	17.0%
9	7.7	-63.8%	35.2%
10	15.6	-47.5%	22.1%
11	3.9	-46.7%	3.7%
12	12.2	-48.6%	-15.8%
13	33.2	-51.2%	-27.4%
14	0.4	-66.6%	-32.5%
15	1.9	-78.5%	-34.6%
16	0.0	-78.0%	-11.3%

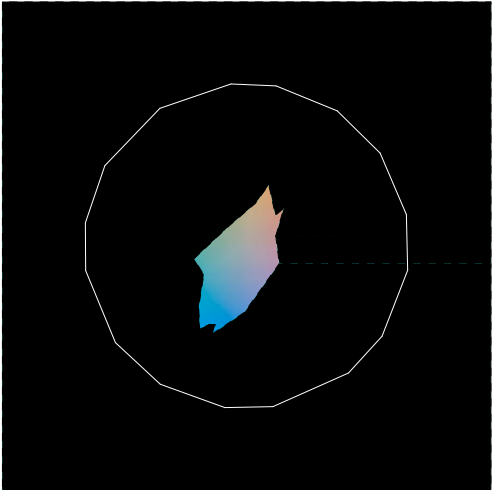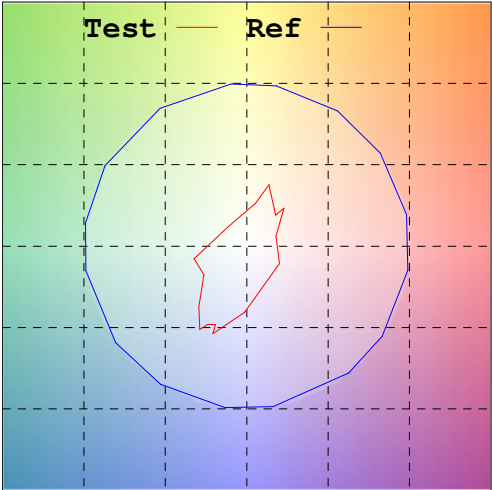

Rf by Hue

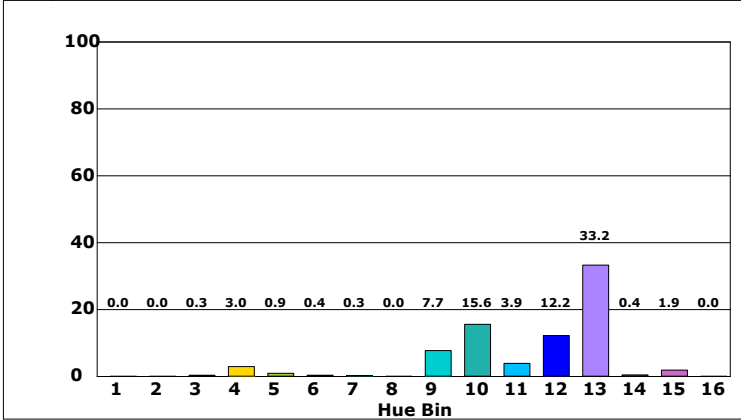

Chroma by Hue

