



光谱图

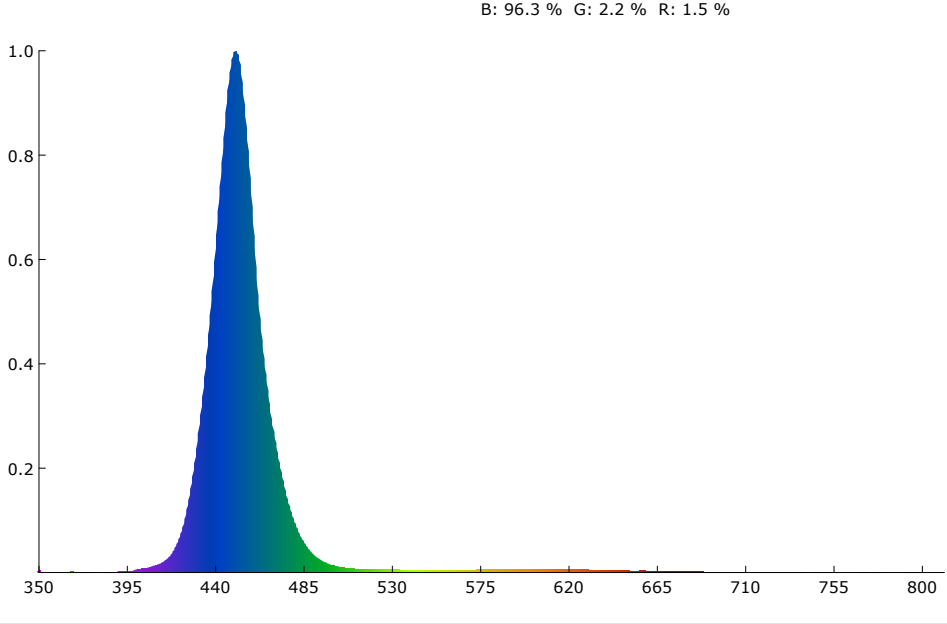

SDCM

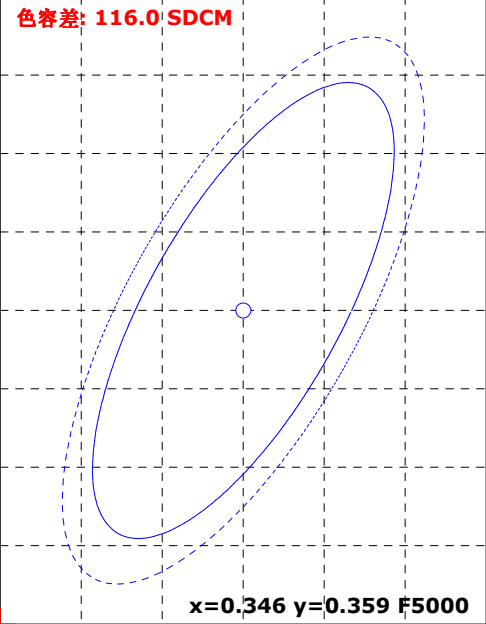

颜色参数:

坐标x: 0.1581 坐标y: 0.0353 坐标u: 0.2035 坐标v: 0.0682 坐标u': 0.2035 坐标v': 0.1023
红色比: 1.5 % 绿色比: 2.2 % 蓝色比: 96.3 % 光通量红色比: 5.4 % 光通量绿色比: 27.9 % 光通量蓝色比: 66.7 %

显色指数: -40.5 AvgR: -37.4
R1: 56.7 R2: -40.6 R3: -99.0 R4: -87.5 R5: 53.0 R6: -35.1 R7: -59.8 R8: -34.7
R9: -56.0 R10: -99.0 R11: -99.0 R12: -96.5 R13: 20.9 R14: -39.3 R15: 55.0


色温: 99999 K 光通量: 379.345 lm 峰值波长: 450.6 nm 色容差: 116.0
明暗视觉比: 17.1 中心波长: 450.2 nm 主波长: 455.1 nm 质心波长: 457.1 nm
半宽度: 24.7 nm 色偏差: 0.15016 色纯度: 96.0 % 色质指数: 0.3
LER(TM-30): 45.6 辐射功率: 8310.4 mw 色域指数(Rg): nan 逼真度(Rf): -nan(ind)
红光辐射功率: 126.7 mw 近红辐射功率: 20.0 mw 远红辐射功率: 3.8 mw

电参数:


光效: 3.6 Lm/W 能效: 4.0 能效等级: G
电压: 219.6 V 电流: 0.727 A 功率: 104.000 W 功率因素: 0.651

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:05/30/14
备注:

Rf: -nan(ind) CCT: 99999K u': 0.2035
Rg: nan LER: 45.6 Duv: 0.15016 v': 0.1023

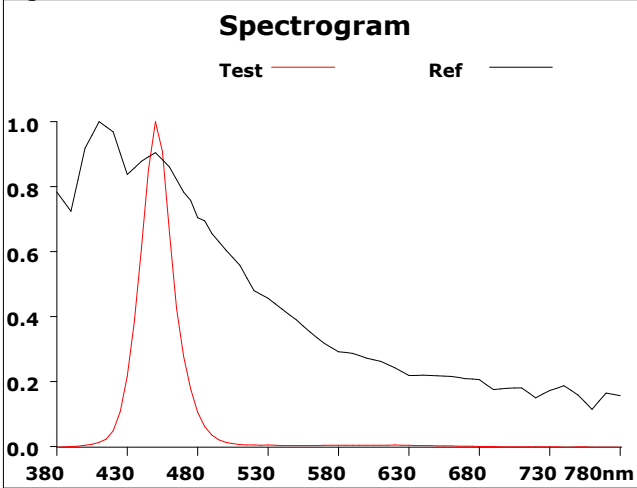

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-114.8%	60.2%
2	0.0	46.6%	-37.8%
3	-nan(ind)	nan%	-nan(ind)%
4	-nan(ind)	nan%	-nan(ind)%
5	-nan(ind)	nan%	-nan(ind)%
6	-nan(ind)	nan%	-nan(ind)%
7	-nan(ind)	nan%	-nan(ind)%
8	-nan(ind)	nan%	-nan(ind)%
9	-nan(ind)	nan%	-nan(ind)%
10	-nan(ind)	nan%	-nan(ind)%
11	0.0	32.9%	-227.0%
12	0.0	-55.7%	-345.2%
13	0.0	-200.5%	-320.5%
14	0.0	-305.4%	-241.2%
15	0.0	-400.1%	-147.0%
16	0.0	-327.2%	12.0%

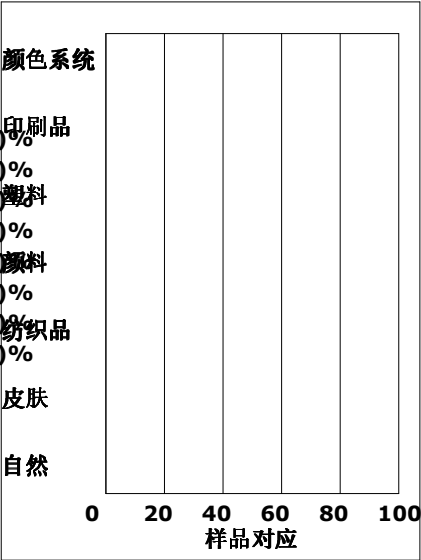

ERROR: rangecheck
OFFENDING COMMAND: roll

STACK:

2
4
-2.14748e+011
-2.14748e+012