512K x 36, 1M x 18
2.5V Synchronous ZBT™ SRAMs
2.5V I/O, Burst Counter
Flow-Through Outputs

IDT71T75702
OBSOLETE PART

Features

- **512K x 36, 1M x 18 memory configurations**
- **Supports high performance system speed - 100 MHz (7.5 ns Clock-to-Data Access)**
- **ZBT™ Feature - No dead cycles between write and read cycles**
- **Internally synchronized output buffer enable eliminates the need to control $\overline{OE}$**
- **Single R/$\overline{W}$ (READ/WRITE) control pin**
- **4-word burst capability (Interleaved or linear)**
- **Individual byte write ($\overline{BW_1}$ - $\overline{BW_4}$) control (May tie active)**
- **Three chip enables for simple depth expansion**
- **2.5V power supply (±5%)**
- **2.5V (±5%) I/O Supply (V_{DDQ})**
- **Power down controlled by ZZ input**
- **Boundary Scan JTAG Interface (IEEE 1149.1 Compliant)**
- **Packaged in a JEDEC standard 100-pin plastic thin quad flatpack (TQFP), 119 ball grid array (BGA)**

Description

The IDT71T75702/902 are 2.5V high-speed 18,874,368-bit (18 Megabit) synchronous SRAMs organized as 512K x 36 /1M x 18. They are designed to eliminate dead bus cycles when turning the bus around between reads and writes, or writes and reads. Thus they have been given the name ZBT™, or Zero Bus Turnaround.

Address and control signals are applied to the SRAM during one clock cycle, and on the next clock cycle the associated data cycle occurs, be it read or write.

The IDT71T75702/902 contain address, data-in and control signal registers. The outputs are flow-through (no output data register). Output enable is the only asynchronous signal and can be used to disable the outputs at any given time.

A Clock Enable ($\overline{CEN}$) pin allows operation of the IDT71T75702/902 to be suspended as long as necessary. All synchronous inputs are ignored when $\overline{CEN}$ is high and the internal device registers will hold their previous values.

There are three chip enable pins ($\overline{CE_1}$, CE_2, $\overline{CE_2}$) that allow the user to deselect the device when desired. If any one of these three is not asserted when ADV/$\overline{LD}$ is low, no new memory operation can be initiated. However, any pending data transfers (reads or writes) will be completed. The data bus will tri-state one cycle after the chip is deselected or a write is initiated.

The IDT71T75702/902 have an on-chip burst counter. In the burst mode, the IDT71T75702/902 can provide four cycles of data for a single address presented to the SRAM. The order of the burst sequence is defined by the $\overline{LBO}$ input pin. The $\overline{LBO}$ pin selects between linear and interleaved burst sequence. The ADV/$\overline{LD}$ signal is used to load a new external address (ADV/$\overline{LD}$ = LOW) or increment the internal burst counter (ADV/$\overline{LD}$ = HIGH).

The IDT71T75702/902 SRAMs utilize IDT's high-performance CMOS process, and are packaged in a JEDEC Standard 14mm x 20mm 100-pin plastic thin quad flatpack (TQFP) as well as a 119 ball grid array (BGA).

OBSOLETE PART
NOT RECOMMENDED FOR
NEW DESIGNS

Pin Description Summary

A_0-A_{19}	Address Inputs	Input	Synchronous
$\overline{CE_1}$, CE_2, $\overline{CE_2}$	Chip Enables	Input	Synchronous
$\overline{OE}$	Output Enable	Input	Asynchronous
R/$\overline{W}$	Read/Write Signal	Input	Synchronous
$\overline{CEN}$	Clock Enable	Input	Synchronous
$\overline{BW_1}$, $\overline{BW_2}$, $\overline{BW_3}$, $\overline{BW_4}$	Individual Byte Write Selects	Input	Synchronous
CLK	Clock	Input	N/A
ADV/$\overline{LD}$	Advance Burst Address/Load New Address	Input	Synchronous
$\overline{LBO}$	Linear/Interleaved Burst Order	Input	Static
TMS	Test Mode Select	Input	N/A
TDI	Test Data Input	Input	N/A
TCK	Test Clock	Input	N/A
TDO	Test Data Output	Output	N/A
$\overline{TRST}$	JTAG Reset (Optional)	Input	Asynchronous
ZZ	Sleep Mode	Input	Synchronous
I/O_0-I/O_{31}, I/O_{P1}-I/O_{P4}	Data Input/Output	I/O	Synchronous
V_{DD}, V_{DDQ}	Core Power, I/O Power	Supply	Static
V_{SS}	Ground	Supply	Static

5319 tbl 01

FEBRUARY 2009

© 2019 Renesas Electronics Corporation

Pin Definitions(1)

Symbol	Pin Function	I/O	Active	Description
A_0-A_{19}	Address Inputs	I	N/A	Synchronous Address inputs. The address register is triggered by a combination of the rising edge of CLK, ADV/$\overline{LD}$ low, $\overline{CEN}$ low, and true chip enables.
ADV/$\overline{LD}$	Advance / Load	I	N/A	ADV/$\overline{LD}$ is a synchronous input that is used to load the internal registers with new address and control when it is sampled low at the rising edge of clock with the chip selected. When ADV/$\overline{LD}$ is low with the chip deselected, any burst in progress is terminated. When ADV/$\overline{LD}$ is sampled high then the internal burst counter is advanced for any burst that was in progress. The external addresses are ignored when ADV/$\overline{LD}$ is sampled high.
R/$\overline{W}$	Read / Write	I	N/A	R/$\overline{W}$ signal is a synchronous input that identifies whether the current load cycle initiated is a Read or Write access to the memory array. The data bus activity for the current cycle takes place one clock cycle later.
$\overline{CEN}$	Clock Enable	I	LOW	Synchronous Clock Enable Input. When $\overline{CEN}$ is sampled high, all other synchronous inputs, including clock are ignored and outputs remain unchanged. The effect of $\overline{CEN}$ sampled high on the device outputs is as if the low to high clock transition did not occur. For normal operation, $\overline{CEN}$ must be sampled low at rising edge of clock.
$\overline{BW_1}$-$\overline{BW_4}$	Individual Byte Write Enables	I	LOW	Synchronous byte write enables. Each 9-bit byte has its own active low byte write enable. On load write cycles (When R/$\overline{W}$ and ADV/$\overline{LD}$ are sampled low) the appropriate byte write signal ($\overline{BW_1}$-$\overline{BW_4}$) must be valid. The byte write signal must also be valid on each cycle of a burst write. Byte Write signals are ignored when R/$\overline{W}$ is sampled high. The appropriate byte(s) of data are written into the device one cycle later. $\overline{BW_1}$-$\overline{BW_4}$ can all be tied low if always doing write to the entire 36-bit word.
$\overline{CE_1}$, $\overline{CE_2}$	Chip Enables	I	LOW	Synchronous active low chip enable. $\overline{CE_1}$ and $\overline{CE_2}$ are used with CE_2 to enable the IDT71T75702/902 ($\overline{CE_1}$ or $\overline{CE_2}$ sampled high or CE_2 sampled low) and ADV/$\overline{LD}$ low at the rising edge of clock, initiates a deselect cycle. The ZBT™ has a one cycle deselect, i.e., the data bus will tri-state one clock cycle after deselect is initiated.
CE_2	Chip Enable	I	HIGH	Synchronous active high chip enable. CE_2 is used with $\overline{CE_1}$ and $\overline{CE_2}$ to enable the chip. CE_2 has inverted polarity but otherwise identical to $\overline{CE_1}$ and $\overline{CE_2}$.
CLK	Clock	I	N/A	This is the clock input to the IDT71T75702/902. Except for $\overline{OE}$, all timing references for the device are made with respect to the rising edge of CLK.
I/O_0-I/O_{31} I/O_{P1}-I/O_{P4}	Data Input/Output	I/O	N/A	Data input/output (I/O) pins. The data input path is registered, triggered by the rising edge of CLK. The data output path is flow-through (no output register).
$\overline{LBO}$	Linear Burst Order	I	LOW	Burst order selection input. When $\overline{LBO}$ is high the Interleaved burst sequence is selected. When $\overline{LBO}$ is low the Linear burst sequence is selected. $\overline{LBO}$ is a static input, and it must not change during device operation.
$\overline{OE}$	Output Enable	I	LOW	Asynchronous output enable. $\overline{OE}$ must be low to read data from the IDT71T75702/902. When $\overline{OE}$ is HIGH the I/O pins are in a high-impedance state. $\overline{OE}$ does not need to be actively controlled for read and write cycles. In normal operation, $\overline{OE}$ can be tied low.
TMS	Test Mode Select	I	N/A	Gives input command for TAP controller; sampled on rising edge of TCK. This pin has an internal pullup.
TDI	Test Data Input	I	N/A	Serial input of registers placed between TDI and TDO. Sampled on rising edge of TCK. This pin has an internal pullup.
TCK	Test Clock	I	N/A	Clock input of TAP controller. Each TAP event is clocked. Test inputs are captured on rising edge of TCK, while test outputs are driven from falling edge of TCK. This pin has an internal pullup.
TDO	Test Data Output	O	N/A	Serial output of registers placed between TDI and TDO. This output is active depending on the state of the TAP controller.
$\overline{TRST}$	JTAG Reset (Optional)	I	LOW	Optional asynchronous JTAG reset. Can be used to reset the TAP controller, but not required. JTAG reset occurs automatically at power up and also resets using TMS and TCK per IEEE 1149.1. If not used $\overline{TRST}$ can be left floating. This pin has an internal pullup. Only available in BGA package.
ZZ	Sleep Mode	I	HIGH	Synchronous sleep mode input. ZZ HIGH will gate the CLK internally and power down the IDT71T75702/902 to its lowest power consumption level. Data retention is guaranteed in Sleep Mode. This pin has an internal pulldown.
V_{DD}	Power Supply	N/A	N/A	2.5V core power supply.
V_{DDQ}	Power Supply	N/A	N/A	2.5V I/O Supply.
V_{SS}	Ground	N/A	N/A	Ground.


NOTE:

5319 tbl 02

1. All synchronous inputs must meet specified setup and hold times with respect to CLK.


© 2019 Renesas Electronics Corporation

Functional Block Diagram — 512K x 36

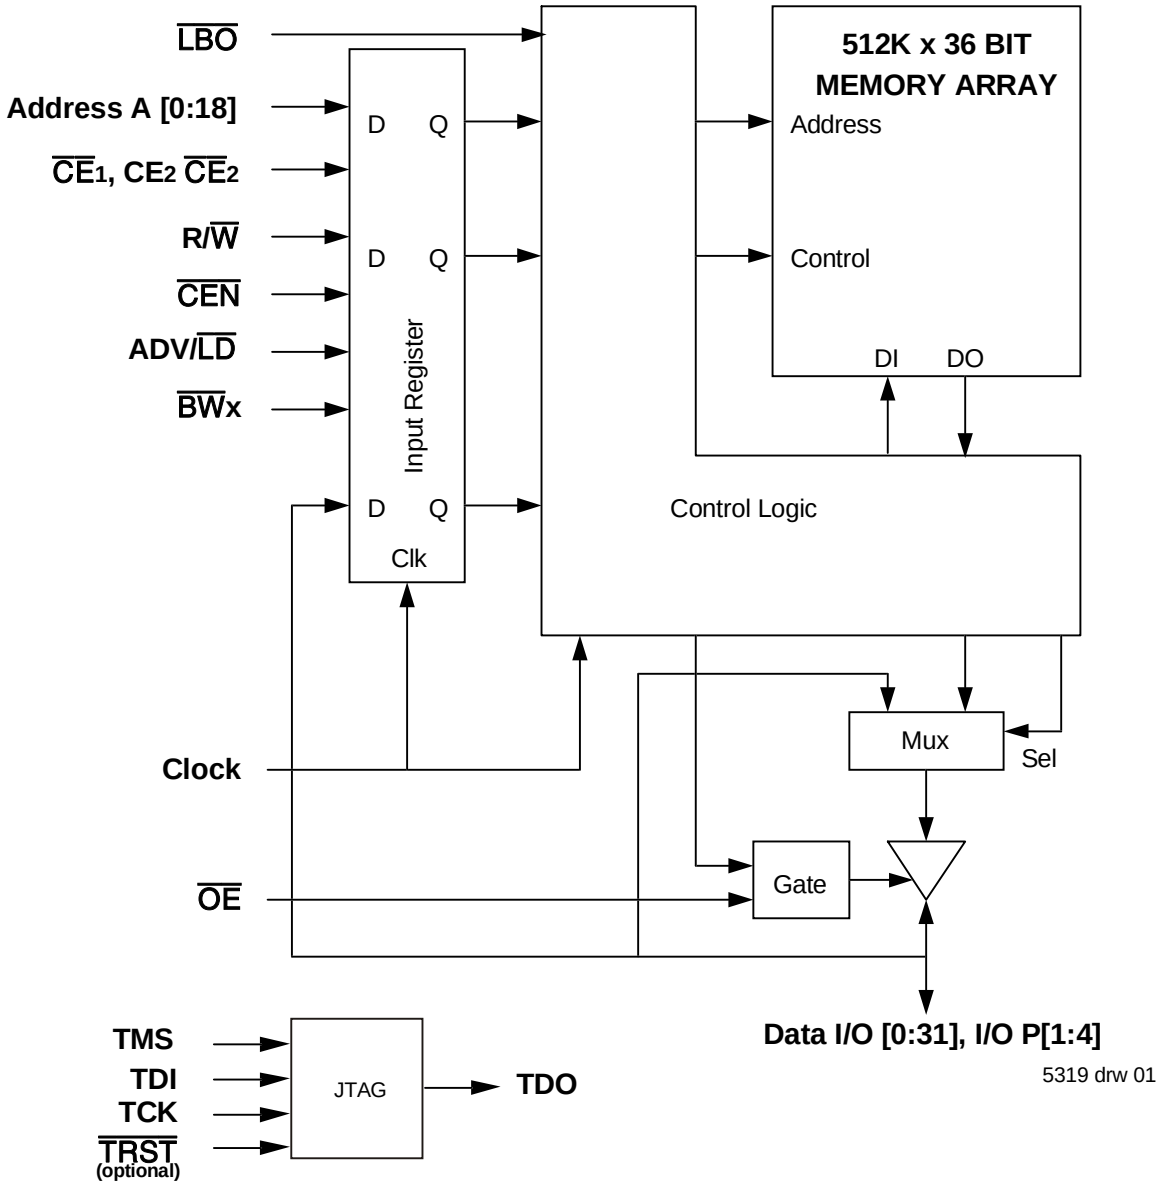

© 2019 Renesas Electronics Corporation

Functional Block Diagram — 1M x 18

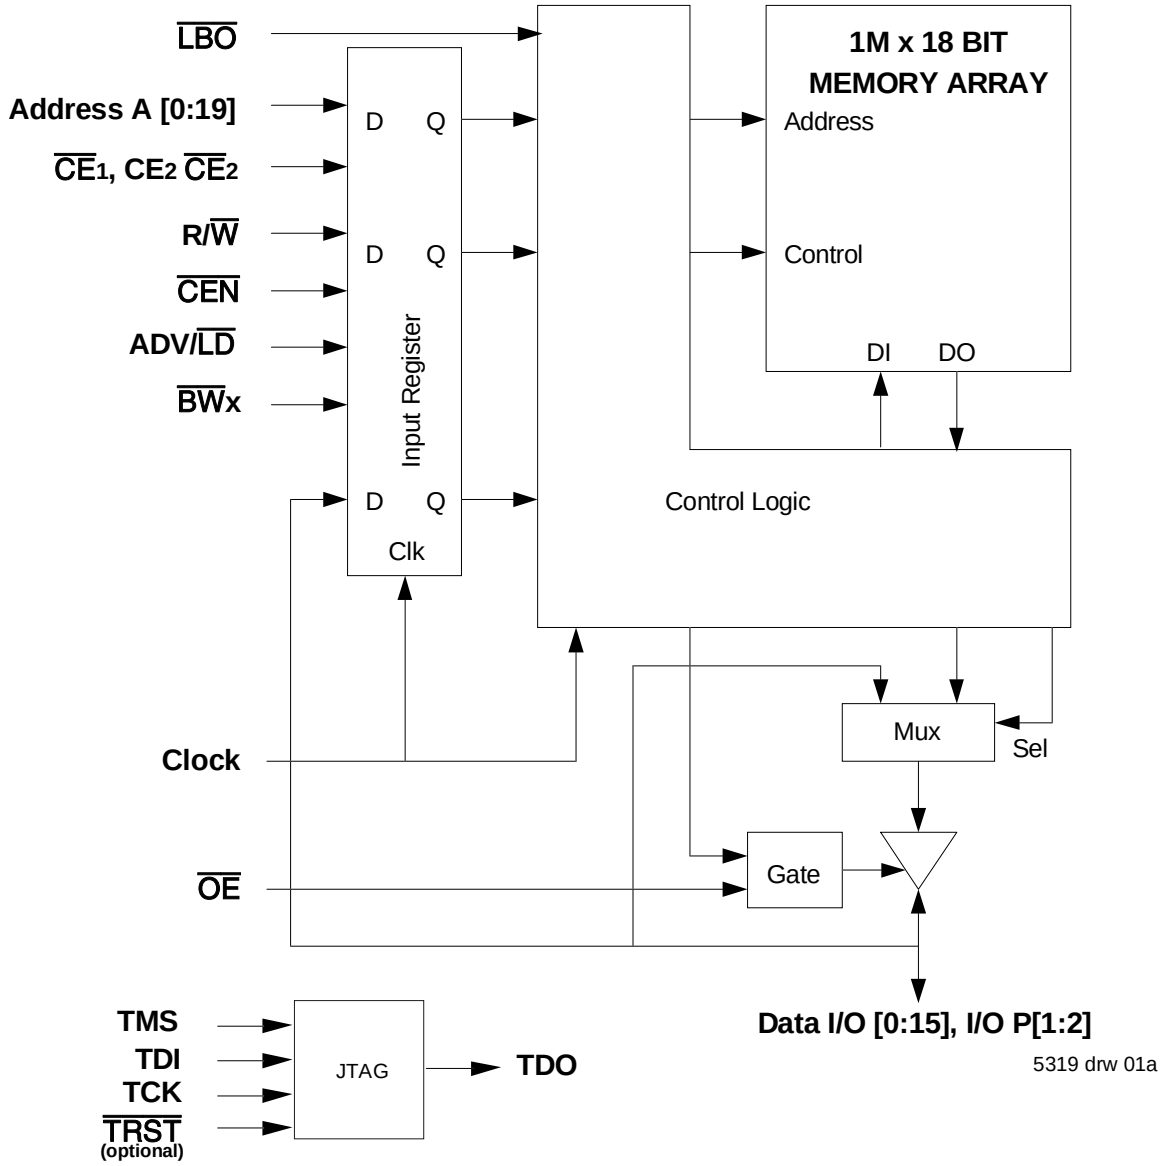

5319 drw 01a

Recommended DC Operating Conditions

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_{DD}	Core Supply Voltage	2.375	2.5	2.625	V
V_{DDQ}	I/O Supply Voltage	2.375	2.5	2.625	V
V_{SS}	Ground	0	0	0	V
V_{IH}	Input High Voltage — Inputs	1.7	—	V_{DD} +0.3	V
V_{IH}	Input High Voltage — I/O	1.7	—	V_{DDQ} +0.3[2]	V
V_{IL}	Input Low Voltage	-0.3[1]	—	0.7	V

5319 tbl 03

NOTE:
1. V_{IL} (min.) = –0.8V for pulse width less than $t_{CYC}/2$, once per cycle.

© 2019 Renesas Electronics Corporation


Recommended Operating Temperature and Supply Voltage

Grade	Ambient Temperature(1)	VSS	VDD	VDDQ
Commerical	0 °C to +70 °C	OV	2.5V ± 5%	2.5V ± 5%
Industrial	-40 °C to +85 °C	OV	2.5V ± 5%	2.5V ± 5%

5319 tbl 05

NOTE:
1. During production testing, the case temperature equals the ambient temperature.

Pin Configuration — 512K x 36

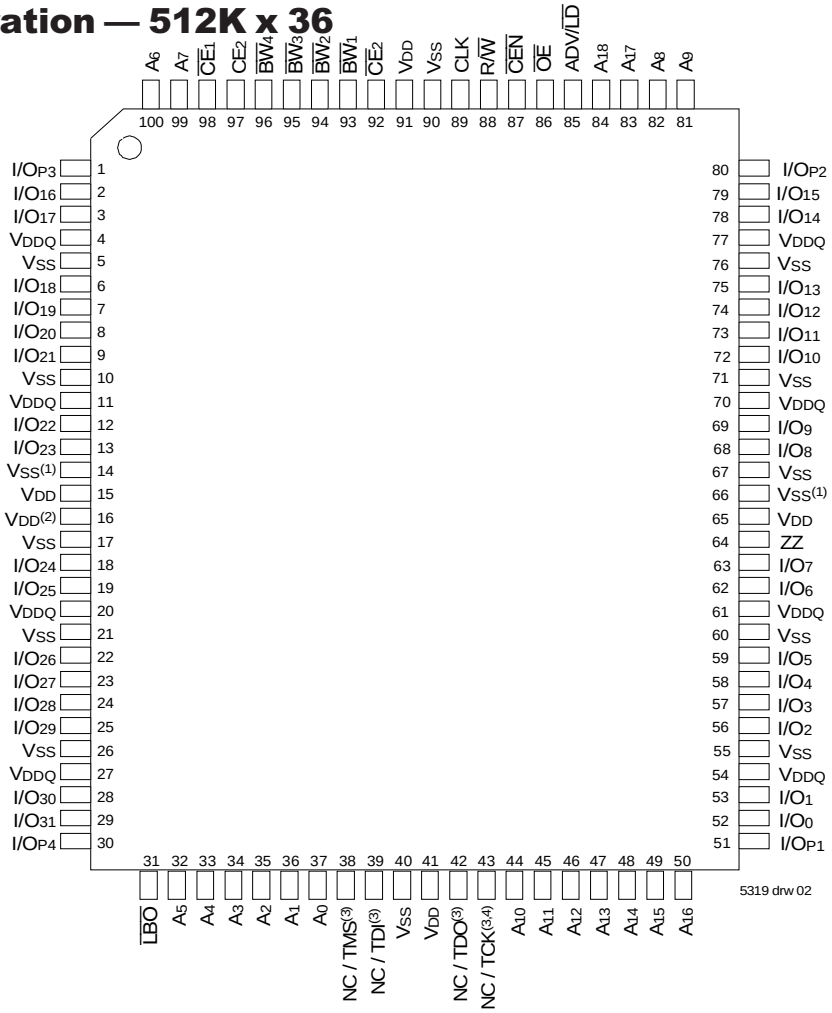


Top View
100 TQFP

NOTES:
1. Pins 14 and 66 do not have to be connected directly to VSS as long as the input voltage is ≤ VIL.
2. Pin 16 does not have to be connected directly to VDD as long as the input voltage is ≥ VIH.
3. Pins 38, 39 and 43 will be pulled internally to VDD if not actively driven. To disable the TAP controller without interfering with normal operation, several settings are possible. Pins 38, 39 and 43 could be tied to VDD or VSS and pin 42 should be left unconnected. Or all JTAG inputs (TMS, TDI and TCK) pins 38, 39 and 43 could be left unconnected "NC" and the JTAG circuit will remain disabled from power up.
4. Pin 43 is reserved for the 36M address. JTAG is not offered in the 100-pin TQFP package for the 36M ZBT device.

© 2019 Renesas Electronics Corporation

Pin Configuration — 1M x 18

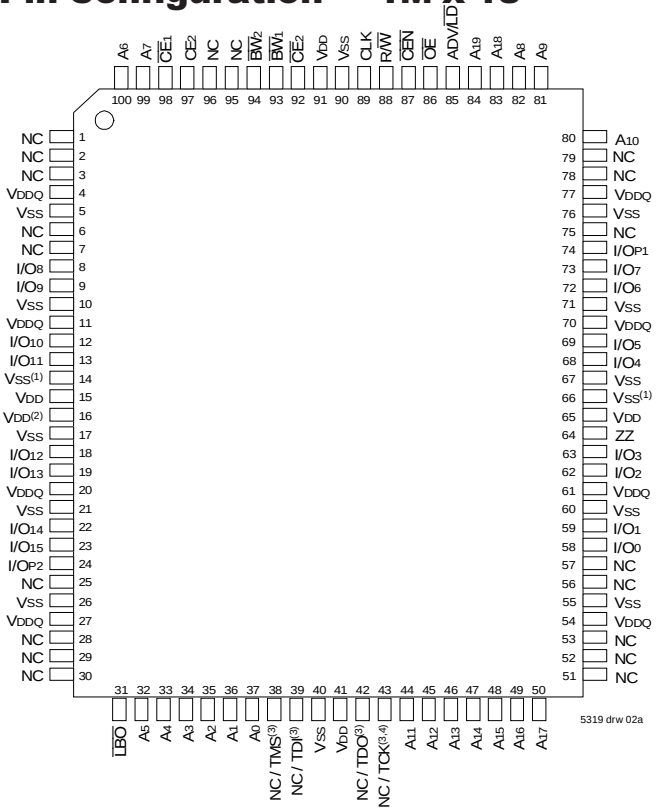

Top View
100 TQFP

NOTES:
1. Pins 14 and 66 do not have to be connected directly to V_{SS} as long as the input voltage is $\leq V_{IL}$.
2. Pin 16 does not have to be connected directly to V_{DD} as long as the input voltage is $\geq V_{IH}$.
3. Pins 38, 39 and 43 will be pulled internally to V_{DD} if not actively driven. To disable the TAP controller without interfering with normal operation, several settings are possible. Pins 38, 39 and 43 could be tied to V_{DD} or V_{SS} and pin 42 should be left unconnected. Or all JTAG inputs (TMS, TDI and TCK) pins38, 39 and 43 could be left unconnected "NC" and the JTAG circuit will remain disabled from power up.
4. Pin 43 is reserved for the 36M address. JTAG is not offered in the 100-pin TQFP package for the 36M ZBT device.

TQFP Capacitance

(T_A = +25°C, f = 1.0MHz)

Symbol	Parameter(1)	Conditions	Max.	Unit
C_{IN}	Input Capacitance	V_{IN} = 3dV	5	pF
$C_{I/O}$	I/O Capacitance	V_{OUT} = 3dV	7	pF

5319 tbl 07

BGA Capacitance

(T_A = +25°C, f = 1.0MHz)

Symbol	Parameter(1)	Conditions	Max.	Unit
C_{IN}	Input Capacitance	V_{IN} = 3dV	7	pF
$C_{I/O}$	I/O Capacitance	V_{OUT} = 3dV	7	pF

5319 tbl 07a

NOTE:
1. This parameter is guaranteed by device characterization, but not production tested.

Absolute Maximum Ratings(1)

Symbol	Rating	Commercial	Industrial	Unit
V_{TERM}(2)	Terminal Voltage with Respect to GND	-0.5 to +3.6	-0.5 to +3.6	V
V_{TERM}(3,6)	Terminal Voltage with Respect to GND	-0.5 to V_{DD}	-0.5 to V_{DD}	V
V_{TERM}(4,6)	Terminal Voltage with Respect to GND	-0.5 to V_{DD} +0.5	-0.5 to V_{DD} +0.5	V
V_{TERM}(5,6)	Terminal Voltage with Respect to GND	-0.5 to V_{DDQ} +0.5	-0.5 to V_{DDQ} +0.5	V
T_A(7)	Operating Ambient Temperature	0 to +70	-40 to +85	°C
T_{BIAS}	Temperature Under Bias	-55 to +125	-55 to +125	°C
T_{STG}	Storage Temperature	-55 to +125	-55 to +125	°C
P_T	Power Dissipation	2.0	2.0	W
I_{OUT}	DC Output Current	50	50	mA

5319 tbl 06

NOTES:
1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. V_{DD} terminals only.
3. V_{DDQ} terminals only.
4. Input terminals only.
5. I/O terminals only.
6. This is a steady-state DC parameter that applies after the power supply has reached its nominal operating value. Power sequencing is not necessary; however, the voltage on any input or I/O pin cannot exceed V_{DDQ} during power supply ramp up.
7. During production testing, the case temperature equals T_A.

fBGA Capacitance

(T_A = +25°C, f = 1.0MHz)

Symbol	Parameter(1)	Conditions	Max.	Unit
C_{IN}	Input Capacitance	V_{IN} = 3dV	7	pF
$C_{I/O}$	I/O Capacitance	V_{OUT} = 3dV	7	pF

5319 tbl 07b

© 2019 Renesas Electronics Corporation

Pin Configuration — 512K x 36, 119 BGA(1,2,3,4)

	1	2	3	4	5	6	7
A	VDDQ	A_6	A_4	A_{18}	A_8	A_{16}	VDDQ
B	NC	CE_2	A_3	ADV/$\overline{LD}$	A_9	$\overline{CE}_2$	NC
C	NC	A_7	A_2	VDD	A_{12}	A_{15}	NC
D	I/O_{16}	I/O_{P3}	VSS	NC	VSS	I/O_{P2}	I/O_{15}
E	I/O_{17}	I/O_{18}	VSS	$\overline{CE}_1$	VSS	I/O_{13}	I/O_{14}
F	VDDQ	I/O_{19}	VSS	$\overline{OE}$	VSS	I/O_{12}	VDDQ
G	I/O_{20}	I/O_{21}	$\overline{BW}_3$	A_{17}	$\overline{BW}_2$	I/O_{11}	I/O_{10}
H	I/O_{22}	I/O_{23}	VSS	R/$\overline{W}$	VSS	I/O_9	I/O_8
J	VDDQ	VDD	VDD(2)	VDD	VSS(1)	VDD	VDDQ
K	I/O_{24}	I/O_{26}	VSS	CLK	VSS	I/O_6	I/O_7
L	I/O_{25}	I/O_{27}	$\overline{BW}_4$	NC	$\overline{BW}_1$	I/O_4	I/O_5
M	VDDQ	I/O_{28}	VSS	$\overline{CEN}$	VSS	I/O_3	VDDQ
N	I/O_{29}	I/O_{30}	VSS	A_1	VSS	I/O_2	I/O_1
P	I/O_{31}	I/O_{P4}	VSS	A_0	VSS	I/O_{P1}	I/O_0
R	NC	A_5	$\overline{LBO}$	VDD	VSS(1)	A_{13}	NC
T	NC	NC	A_{10}	A_{11}	A_{14}	NC(4)	ZZ
U	VDDQ	NC/TMS(3)	NC/TDI(3)	NC/TCK(3)	NC/TDO(3)	NC/$\overline{TRST}$(3,5)	VDDQ

5319 tbl 25

Top View

Pin Configurations — 1M x 18, 119 BGA(1,2,3,4)

	1	2	3	4	5	6	7
A	VDDQ	A_6	A_4	A_{19}	A_8	A_{16}	VDDQ
B	NC	CE_2	A_3	ADV/$\overline{LD}$	A_9	$\overline{CE}_2$	NC
C	NC	A_7	A_2	VDD	A_{13}	A_{17}	NC
D	I/O_8	NC	VSS	NC	VSS	I/O_{P1}	NC
E	NC	I/O_9	VSS	$\overline{CE}_1$	VSS	NC	I/O_7
F	VDDQ	NC	VSS	$\overline{OE}$	VSS	I/O_6	VDDQ
G	NC	I/O_{10}	$\overline{BW}_2$	A_{18}	VSS	NC	I/O_5
H	I/O_{11}	NC	VSS	R/$\overline{W}$	VSS	I/O_4	NC
J	VDDQ	VDD	VDD(2)	VDD	VSS(1)	VDD	VDDQ
K	NC	I/O_{12}	VSS	CLK	VSS	NC	I/O_3
L	I/O13	NC	VSS	NC	$\overline{BW}1$	I/O_2	NC
M	VDDQ	I/O_{14}	VSS	$\overline{CEN}$	VSS	NC	VDDQ
N	I/O_{15}	NC	VSS	A_1	VSS	I/O_1	NC
P	NC	I/O_{P2}	VSS	A_0	VSS	NC	I/O_0
R	NC	A_5	$\overline{LBO}$	VDD	VSS(1)	A_{12}	NC
T	NC	A_{10}	A_{15}	NC(4)	A_{14}	A_{11}	ZZ
U	VDDQ	NC/TMS(3)	NC/TDI(3)	NC/TCK(3)	NC/TDO(3)	NC/$\overline{TRST}$(3,5)	VDDQ

5319 tbl 25a

Top View

NOTES:

1. Pins R5 and J5 do not have to be connected directly to VSS as long as the input voltage is ≤ VIL.
2. Pin J3 does not have to be connected directly to VDD as long as the input voltage is ≥ VIH.
3. U2, U3, U4 and U6 will be pulled internally to VDD if not actively driven. To disable the TAP controller without interfering with normal operation, several settings are possible. U2, U3, U4 and U6 could be tied to VDD or VSS and U5 should be left unconnected. Or all JTAG inputs(TMS, TDI, and TCK and $\overline{TRST}$) U2, U3, U4 and U6 could be left unconnected "NC" and the JTAG circuit will remain disabled from power up.
4. The 36M address will be ball T6 (for the 512K x 36 device) and ball T4 (for the 1M x 18 device).
5. $\overline{TRST}$ is offered as an optional JTAG reset if required in the application. If not needed, can be left floating and will internally be pulled to VDD.

© 2019 Renesas Electronics Corporation

Synchronous Truth Table[1]

$\overline{CEN}$	R/$\overline{W}$	$\overline{CE_1}$, $\overline{CE_2}$[5]	ADV/$\overline{LD}$	$\overline{BW}$x	ADDRESS USED	PREVIOUS CYCLE	CURRENT CYCLE	I/O (One cycle later)
L	L	L	L	Valid	External	X	LOAD WRITE	D[7]
L	H	L	L	X	External	X	LOAD READ	Q[7]
L	X	X	H	Valid	Internal	LOAD WRITE / BURST WRITE	BURST WRITE (Advance burst counter)[2]	D[7]
L	X	X	H	X	Internal	LOAD READ / BURST READ	BURST READ (Advance burst counter)[2]	Q[7]
L	X	H	L	X	X	X	DESELECT or STOP[3]	HIZ
L	X	X	H	X	X	DESELECT / NOOP	NOOP	HIZ
H	X	X	X	X	X	X	SUSPEND[4]	Previous Value

5319 tbl 08

NOTES:
1. L = V_{IL}, H = V_{IH}, X = Don't Care.
2. When ADV/$\overline{LD}$ signal is sampled high, the internal burst counter is incremented. The R/$\overline{W}$ signal is ignored when the counter is advanced. Therefore the nature of the burst cycle (Read or Write) is determined by the status of the R/$\overline{W}$ signal when the first address is loaded at the beginning of the burst cycle.
3. Deselect cycle is initiated when either ($\overline{CE_1}$, or $\overline{CE_2}$ is sampled high or CE_2 is sampled low) and ADV/$\overline{LD}$ is sampled low at rising edge of clock. The data bus will tri-state one cycle after deselect is initiated.
4. When $\overline{CEN}$ is sampled high at the rising edge of clock, that clock edge is blocked from propogating through the part. The state of all the internal registers and the I/Os remains unchanged.
5. To select the chip requires $\overline{CE_1}$ = L, $\overline{CE_2}$ = L and CE_2 = H on these chip enable pins. The chip is deselected if any one of the chip enables is false.
6. Device Outputs are ensured to be in High-Z during device power-up.
7. Q - data read from the device, D - data written to the device.

Partial Truth Table for Writes[1]

OPERATION	R/$\overline{W}$	$\overline{BW_1}$	$\overline{BW_2}$	$\overline{BW_3}$[3]	$\overline{BW_4}$[3]
READ	H	X	X	X	X
WRITE ALL BYTES	L	L	L	L	L
WRITE BYTE 1 (I/O[0:7], I/O_{P1})[2]	L	L	H	H	H
WRITE BYTE 2 (I/O[8:15], I/O_{P2})[2]	L	H	L	H	H
WRITE BYTE 3 (I/O[16:23], I/O_{P3})[2,3]	L	H	H	L	H
WRITE BYTE 4 (I/O[24:31], I/O_{P4})[2,3]	L	H	H	H	L
NO WRITE	L	H	H	H	H

5319 tbl 09

NOTES:
1. L = V_{IL}, H = V_{IH}, X = Don't Care.
2. Multiple bytes may be selected during the same cycle.
3. N/A for x18 configuration.

Interleaved Burst Sequence Table ($\overline{LBO}$=V_{DD})

	Sequence 1		Sequence 2		Sequence 3		Sequence 4	
	A1	A0	A1	A0	A1	A0	A1	A0
First Address	0	0	0	1	1	0	1	1
Second Address	0	1	0	0	1	1	1	0
Third Address	1	0	1	1	0	0	0	1
Fourth Address[1]	1	1	1	0	0	1	0	0

5319 tbl 10

NOTE:
1. Upon completion of the Burst sequence the counter wraps around to its initial state and continues counting.

© 2019 Renesas Electronics Corporation


Linear Burst Sequence Table ($\overline{LBO}$=Vss)

	Sequence 1		Sequence 2		Sequence 3		Sequence 4	
	A1	A0	A1	A0	A1	A0	A1	A0
First Address	0	0	0	1	1	0	1	1
Second Address	0	1	1	0	1	1	0	0
Third Address	1	0	1	1	0	0	0	1
Fourth Address(1)	1	1	0	0	0	1	1	0

5319 tbl 11

NOTE:
1. Upon completion of the Burst sequence the counter wraps around to its initial state and continues counting.

Functional Timing Diagram(1)

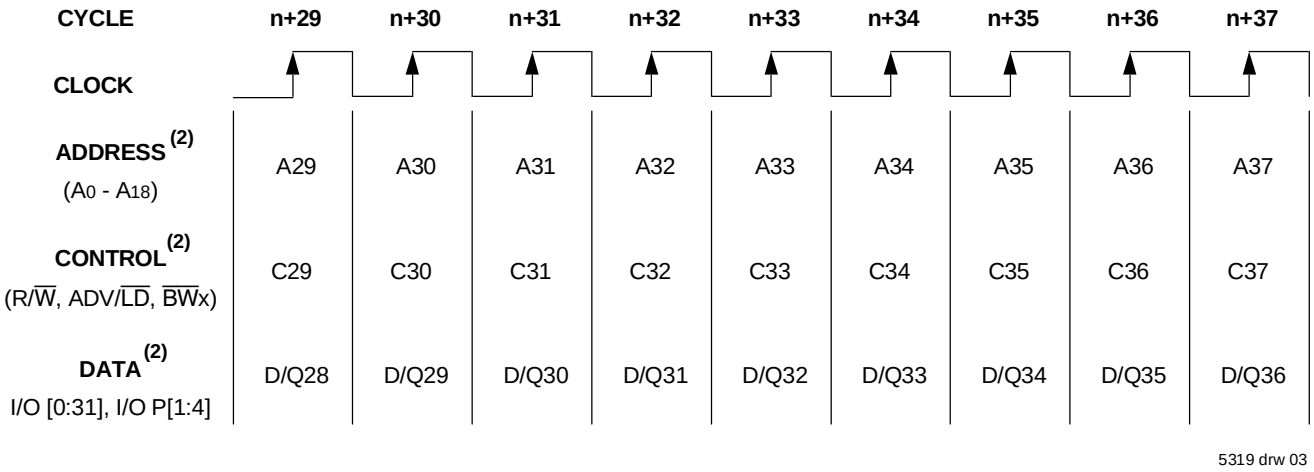

5319 drw 03

NOTES:
1. This assumes $\overline{CEN}$, $\overline{CE}_1$, CE_2 and $\overline{CE}_2$ are all true.
2. All Address, Control and Data_In are only required to meet set-up and hold time with respect to the rising edge of clock. Data_Out is valid after a clock-to-data delay from the rising edge of clock.

© 2019 Renesas Electronics Corporation

Device Operation - Showing Mixed Load, Burst, Deselect and NOOP Cycles(2)

Cycle	Address	R/$\overline{W}$	ADV/$\overline{LD}$	$\overline{CE_1}$(1)	$\overline{CEN}$	$\overline{BW}$x	$\overline{OE}$	I/O	Comments
n	A_0	H	L	L	L	X	X	D_1	Load read
n+1	X	X	H	X	L	X	L	Q_0	Burst read
n+2	A_1	H	L	L	L	X	L	Q_{0+1}	Load read
n+3	X	X	L	H	L	X	L	Q_1	Deselect or STOP
n+4	X	X	H	X	L	X	X	Z	NOOP
n+5	A_2	H	L	L	L	X	X	Z	Load read
n+6	X	X	H	X	L	X	L	Q_2	Burst read
n+7	X	X	L	H	L	X	L	Q_{2+1}	Deselect or STOP
n+8	A_3	L	L	L	L	L	X	Z	Load write
n+9	X	X	H	X	L	L	X	D_3	Burst write
n+10	A_4	L	L	L	L	L	X	D_{3+1}	Load write
n+11	X	X	L	H	L	X	X	D_4	Deselect or STOP
n+12	X	X	H	X	L	X	X	Z	NOOP
n+13	A_5	L	L	L	L	L	X	Z	Load write
n+14	A_6	H	L	L	L	X	X	D_5	Load read
n+15	A_7	L	L	L	L	L	L	Q_6	Load write
n+16	X	X	H	X	L	L	X	D_7	Burst write
n+17	A_8	H	L	L	L	X	X	D_{7+1}	Load read
n+18	X	X	H	X	L	X	L	Q_8	Burst read
n+19	A_9	L	L	L	L	L	L	Q_{8+1}	Load write

5319 tbl 12

NOTES:
1. $\overline{CE_2}$ timing transition is identical to $\overline{CE_1}$ signal. CE_2 timing transition is identical but inverted to the $\overline{CE_1}$ and $\overline{CE_2}$ signals.
2. H = High; L = Low; X = Don't Care; Z = High Impedence.

© 2019 Renesas Electronics Corporation

Read Operation(1)

Cycle	Address	R/$\overline{W}$	ADV/$\overline{LD}$	$\overline{CE_1}$(2)	$\overline{CEN}$	$\overline{BW}$x	$\overline{OE}$	I/O	Comments
n	A_0	H	L	L	L	X	X	X	Address and Control meet setup
n+1	X	X	X	X	X	X	L	Q_0	Contents of Address A_0 Read Out

5319 tbl 13

NOTES:
1. H = High; L = Low; X = Don't Care; Z = High Impedance.
2. $\overline{CE_2}$ timing transition is identical to $\overline{CE_1}$ signal. CE_2 timing transition is identical but inverted to the $\overline{CE_1}$ and $\overline{CE_2}$ signals.

Burst Read Operation(1)

Cycle	Address	R/$\overline{W}$	ADV/$\overline{LD}$	$\overline{CE_1}$(2)	$\overline{CEN}$	$\overline{BW}$x	$\overline{OE}$	I/O	Comments
n	A_0	H	L	L	L	X	X	X	Address and Control meet setup
n+1	X	X	H	X	L	X	L	Q_0	Address A_0 Read Out, Inc. Count
n+2	X	X	H	X	L	X	L	Q_{0+1}	Address A_{0+1} Read Out, Inc. Count
n+3	X	X	H	X	L	X	L	Q_{0+2}	Address A_{0+2} Read Out, Inc. Count
n+4	X	X	H	X	L	X	L	Q_{0+3}	Address A_{0+3} Read Out, Load A_1
n+5	A_1	H	L	L	L	X	L	Q_0	Address A_0 Read Out, Inc. Count
n+6	X	X	H	X	L	X	L	Q_1	Address A_1 Read Out, Inc. Count
n+7	A_2	H	L	L	L	X	L	Q_{1+1}	Address A_{1+1} Read Out, Load A_2

5319 tbl 14

NOTES:
1. H = High; L = Low; X = Don't Care; Z = High Impedance.
2. $\overline{CE_2}$ timing transition is identical to $\overline{CE_1}$ signal. CE_2 timing transition is identical but inverted to the $\overline{CE_1}$ and $\overline{CE_2}$ signals.

Write Operation(1)

Cycle	Address	R/$\overline{W}$	ADV/$\overline{LD}$	$\overline{CE_1}$(2)	$\overline{CEN}$	$\overline{BW}$x	$\overline{OE}$	I/O	Comments
n	A_0	L	L	L	L	L	X	X	Address and Control meet setup
n+1	X	X	X	X	L	X	X	D_0	Write to Address A_0

5319 tbl 15

NOTES:
1. H = High; L = Low; X = Don't Care; Z = High Impedance.
2. $\overline{CE_2}$ timing transition is identical to $\overline{CE_1}$ signal. CE_2 timing transition is identical but inverted to the $\overline{CE_1}$ and $\overline{CE_2}$ signals.

Burst Write Operation(1)

Cycle	Address	R/$\overline{W}$	ADV/$\overline{LD}$	$\overline{CE_1}$(2)	$\overline{CEN}$	$\overline{BW}$x	$\overline{OE}$	I/O	Comments
n	A_0	L	L	L	L	L	X	X	Address and Control meet setup
n+1	X	X	H	X	L	L	X	D_0	Address A_0 Write, Inc. Count
n+2	X	X	H	X	L	L	X	D_{0+1}	Address A_{0+1} Write, Inc. Count
n+3	X	X	H	X	L	L	X	D_{0+2}	Address A_{0+2} Write, Inc. Count
n+4	X	X	H	X	L	L	X	D_{0+3}	Address A_{0+3} Write, Load A_1
n+5	A_1	L	L	L	L	L	X	D_0	Address A_0 Write, Inc. Count
n+6	X	X	H	X	L	L	X	D_1	Address A_1 Write, Inc. Count
n+7	A_2	L	L	L	L	L	X	D_{1+1}	Address A_{1+1} Write, Load A_2

5319 tbl 16

NOTES:
1. H = High; L = Low; X = Don't Care; Z = High Impedance.
2. $\overline{CE_2}$ timing transition is identical to $\overline{CE_1}$ signal. CE_2 timing transition is identical but inverted to the $\overline{CE_1}$ and $\overline{CE_2}$ signals.

© 2019 Renesas Electronics Corporation

Read Operation with Clock Enable Used(1)

Cycle	Address	R/$\overline{W}$	ADV/$\overline{LD}$	$\overline{CE_1}$(2)	$\overline{CEN}$	$\overline{BW}$x	$\overline{OE}$	I/O	Comments
n	A_0	H	L	L	L	X	X	X	Address A_0 and Control meet setup
n+1	X	X	X	X	H	X	X	X	Clock n+1 Ignored
n+2	A_1	H	L	L	L	X	L	Q_0	Address A_0 Read out, Load A_1
n+3	X	X	X	X	H	X	L	Q_0	Clock Ignored. Data Q_0 is on the bus.
n+4	X	X	X	X	H	X	L	Q_0	Clock Ignored. Data Q_0 is on the bus.
n+5	A_2	H	L	L	L	X	L	Q_1	Address A_1 Read out, Load A_2
n+6	A_3	H	L	L	L	X	L	Q_2	Address A_2 Read out, Load A_3
n+7	A_4	H	L	L	L	X	L	Q_3	Address A_3 Read out, Load A_4

5319 tbl 17

NOTES:
1. H = High; L = Low; X = Don't Care; Z = High Impedance.
2. $\overline{CE_2}$ timing transition is identical to $\overline{CE_1}$ signal. CE_2 timing transition is identical but inverted to the $\overline{CE_1}$ and $\overline{CE_2}$ signals.

Write Operation with Clock Enable Used(1)

Cycle	Address	R/$\overline{W}$	ADV/$\overline{LD}$	$\overline{CE_1}$(2)	$\overline{CEN}$	$\overline{BW}$x	$\overline{OE}$	I/O	Comments
n	A_0	L	L	L	L	L	X	X	Address A_0 and Control meet setup.
n+1	X	X	X	X	H	X	X	X	Clock n+1 Ignored.
n+2	A_1	L	L	L	L	L	X	D_0	Write data D_0, Load A_1.
n+3	X	X	X	X	H	X	X	X	Clock Ignored.
n+4	X	X	X	X	H	X	X	X	Clock Ignored.
n+5	A_2	L	L	L	L	L	X	D_1	Write Data D_1, Load A_2
n+6	A_3	L	L	L	L	L	X	D_2	Write Data D_2, Load A_3
n+7	A_4	L	L	L	L	L	X	D_3	Write Data D_3, Load A_4

5319 tbl 18

NOTES:
1. H = High; L = Low; X = Don't Care; Z = High Impedance.
2. $\overline{CE_2}$ timing transition is identical to $\overline{CE_1}$ signal. CE_2 timing transition is identical but inverted to the $\overline{CE_1}$ and $\overline{CE_2}$ signals.

© 2019 Renesas Electronics Corporation

Read Operation with Chip Enable Used(1)

Cycle	Address	R/$\overline{W}$	ADV/$\overline{LD}$	$\overline{CE}_1$(2)	$\overline{CEN}$	$\overline{BW}$x	$\overline{OE}$	I/O(3)	Comments
n	X	X	L	H	L	X	X	?	Deselected.
n+1	X	X	L	H	L	X	X	Z	Deselected.
n+2	A_0	H	L	L	L	X	X	Z	Address A_0 and Control meet setup.
n+3	X	X	L	H	L	X	L	Q_0	Address A_0 read out, Deselected.
n+4	A_1	H	L	L	L	X	X	Z	Address A_1 and Control meet setup.
n+5	X	X	L	H	L	X	L	Q_1	Address A_1 read out, Deselected.
n+6	X	X	L	H	L	X	X	Z	Deselected.
n+7	A_2	H	L	L	L	X	X	Z	Address A_2 and Control meet setup.
n+8	X	X	L	H	L	X	L	Q_2	Address A_2 read out, Deselected.
n+9	X	X	L	H	L	X	X	Z	Deselected.

5319 tbl 19

NOTES:
1. H = High; L = Low; X = Don't Care; ? = Don't Know; Z = High Impedance.
2. $\overline{CE}_2$ timing transition is identical to $\overline{CE}_1$ signal. CE_2 timing transition is identical but inverted to the $\overline{CE}_1$ and $\overline{CE}_2$ signals.
3. Device outputs are ensured to be in High-Z during device power-up.

Write Operation with Chip Enable Used(1)

Cycle	Address	R/$\overline{W}$	ADV/$\overline{LD}$	$\overline{CE}$(2)	$\overline{CEN}$	$\overline{BW}$x	$\overline{OE}$	I/O	Comments
n	X	X	L	H	L	X	X	?	Deselected.
n+1	X	X	L	H	L	X	X	Z	Deselected.
n+2	A_0	L	L	L	L	L	X	Z	Address A_0 and Control meet setup
n+3	X	X	L	H	L	X	X	D_0	Data D_0 Write In, Deselected.
n+4	A_1	L	L	L	L	L	X	Z	Address A_1 and Control meet setup
n+5	X	X	L	H	L	X	X	D_1	Data D_1 Write In, Deselected.
n+6	X	X	L	H	L	X	X	Z	Deselected.
n+7	A_2	L	L	L	L	L	X	Z	Address A_2 and Control meet setup
n+8	X	X	L	H	L	X	X	D_2	Data D_2 Write In, Deselected.
n+9	X	X	L	H	L	X	X	Z	Deselected.

5319 tbl 20

NOTES:
1. H = High; L = Low; X = Don't Care; ? = Don't Know; Z = High Impedance.
2. $\overline{CE}$ = L is defined as $\overline{CE}_1$ = L, $\overline{CE}_2$ = L and CE2 = H. $\overline{CE}$ = H is defined as $\overline{CE}_1$ = H, $\overline{CE}_2$ = H or CE_2 = L.

© 2019 Renesas Electronics Corporation

DC Electrical Characteristics Over the Operating Temperature and Supply Voltage Range (V_{DD} = 2.5V±5%)

Symbol	Parameter	Test Conditions	Min.	Max.	Unit
$\|I_{LI}\|$	Input Leakage Current	V_{DD} = Max., V_{IN} = 0V to V_{DD}	—	5	µA
$\|I_{LI}\|$	$\overline{LBO}$, JTAG and ZZ Input Leakage Current(1)	V_{DD} = Max., V_{IN} = 0V to V_{DD}	—	30	µA
$\|I_{LO}\|$	Output Leakage Current	V_{OUT} = 0V to V_{CC}	—	5	µA
V_{OL}	Output Low Voltage	I_{OL} = +6mA, V_{DD} = Min.	—	0.4	V
V_{OH}	Output High Voltage	I_{OH} = -6mA, V_{DD} = Min.	2.0	—	V

NOTE: 5319 tbl 21

1. The $\overline{LBO}$, TMS, TDI, TCK and $\overline{TRST}$ pins will be internally pulled to V_{DD} and the ZZ pin will be internally pulled to V_{SS} if they are not actively driven in the application.

DC Electrical Characteristics Over the Operating Temperature and Supply Voltage Range(1) (V_{DD} = 2.5V±5%)

Symbol	Parameter	Test Conditions	7.5ns		8ns		8.5ns		Unit
			Com'l	Ind	Com'l	Ind	Com'l	Ind	
I_{DD}	Operating Power Supply Current	Device Selected, Outputs Open, ADV/$\overline{LD}$ = X, V_{DD} = Max., $V_{IN} \geq V_{IH}$ or $\leq V_{IL}$, f = f_{MAX}(2)	275	295	250	270	225	245	mA
I_{SB1}	CMOS Standby Power Supply Current	Device Deselected, Outputs Open, V_{DD} = Max., $V_{IN} \geq V_{HD}$ or $\leq V_{LD}$, f = 0(2,3)	40	60	40	60	40	60	mA
I_{SB2}	Clock Running Power Supply Current	Device Deselected, Outputs Open, V_{DD} = Max., $V_{IN} \geq V_{HD}$ or $\leq V_{LD}$, f = f_{MAX}(2,3)	105	125	100	120	95	115	mA
I_{SB3}	Idle Power Supply Current	Device Selected, Outputs Open, $\overline{CEN} \geq V_{IH}$, V_{DD} = Max., $V_{IN} \geq V_{HD}$ or $\leq V_{LD}$, f = f_{MAX}(2,3)	60	80	60	80	60	80	mA
I_{ZZ}	Full Sleep Mode Supply Current	Device Selected, Outputs Open, $\overline{CEN} \leq V_{IH}$, V_{DD} = Max., ZZ $\geq V_{HD}$ $V_{IN} \geq V_{HD}$ or $\leq V_{LD}$, f = f_{MAX}(2,3)	40	60	40	60	40	60	mA

NOTES: 5319 tbl 22

1. All values are maximum guaranteed values.
2. At f = f_{MAX}, inputs are cycling at the maximum frequency of read cycles of 1/t_{CYC}; f=0 means no input lines are changing.
3. For I/Os $V_{HD} = V_{DDQ} - 0.2V$, V_{LD} = 0.2V. For other inputs $V_{HD} = V_{DD} - 0.2V$, V_{LD} = 0.2V.

AC Test Load

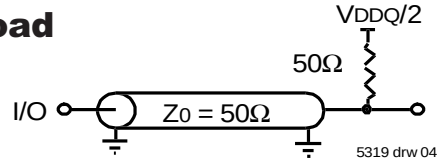


Figure 1. AC Test Load

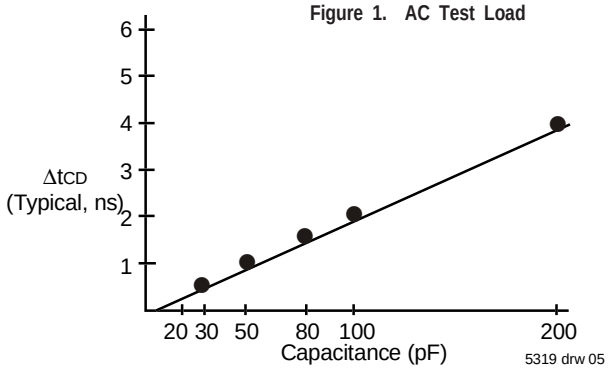


Figure 2. Lumped Capacitive Load, Typical Derating

AC Test Conditions

Input Pulse Levels	0 to 2.5V
Input Rise/Fall Times	2ns
Input Timing Reference Levels	(V_{DDQ}/2)
Output Reference Levels	(V_{DDQ}/2)
Output Load	Figure 1

5319 tbl 23

© 2019 Renesas Electronics Corporation

AC Electrical Characteristics

(V_{DD} = 2.5V±5%, Commercial and Industrial Temperature Ranges)

Symbol	Parameter	7.5ns		8ns		8.5ns		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
t_{CYC}	Clock Cycle Time	10	—	10.5	—	11	—	ns
t_{CH}(1)	Clock High Pulse Width	2.5	—	2.7	—	3.0	—	ns
t_{CL}(1)	Clock Low Pulse Width	2.5	—	2.7	—	3.0	—	ns
Output Parameters								
t_{CD}	Clock High to Valid Data	—	7.5	—	8	—	8.5	ns
t_{CDC}	Clock High to Data Change	2	—	2	—	2	—	ns
t_{CLZ}(2,3,4)	Clock High to Output Active	3	—	3	—	3	—	ns
t_{CHZ}(2,3,4)	Clock High to Data High-Z	—	5	—	5	—	5	ns
t_{OE}	Output Enable Access Time	—	5	—	5	—	5	ns
t_{OLZ}(2,3)	Output Enable Low to Data Active	0	—	0	—	0	—	ns
t_{OHZ}(2,3)	Output Enable High to Data High-Z	—	5	—	5	—	5	ns
Set Up Times								
t_{SE}	Clock Enable Setup Time	2.0	—	2.0	—	2.0	—	ns
t_{SA}	Address Setup Time	2.0	—	2.0	—	2.0	—	ns
t_{SD}	Data In Setup Time	2.0	—	2.0	—	2.0	—	ns
t_{SW}	Read/Write (R/$\overline{W}$) Setup Time	2.0	—	2.0	—	2.0	—	ns
t_{SADV}	Advance/Load (ADV/$\overline{LD}$) Setup Time	2.0	—	2.0	—	2.0	—	ns
t_{SC}	Chip Enable/Select Setup Time	2.0	—	2.0	—	2.0	—	ns
t_{SB}	Byte Write Enable ($\overline{BW}$x) Setup Time	2.0	—	2.0	—	2.0	—	ns
Hold Times								
t_{HE}	Clock Enable Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HA}	Address Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HD}	Data In Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HW}	Read/Write (R/$\overline{W}$) Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HADV}	Advance/Load (ADV/$\overline{LD}$) Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HC}	Chip Enable/Select Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HB}	Byte Write Enable ($\overline{BW}$x) Hold Time	0.5	—	0.5	—	0.5	—	ns


5319 tbl 24

NOTES:

1. Measured as HIGH above 0.6V_{DDQ} and LOW below 0.4V_{DDQ}.
2. Transition is measured ±200mV from steady-state.
3. These parameters are guaranteed with the AC load (Figure 1) by device characterization. They are not production tested.
4. To avoid bus contention, the output buffers are designed such that t_{CHZ} (device turn-off) is about 1ns faster than t_{CLZ} (device turn-on) at a given temperature and voltage. The specs as shown do not imply bus contention because t_{CLZ} is a Min. parameter that is worse case at totally different test conditions (0 deg. C, 2.625V) than t_{CHZ}, which is a Max. parameter (worse case at 70 deg. C, 2.375V).

© 2019 Renesas Electronics Corporation


Timing Waveform of Read Cycle(1,2,3,4)

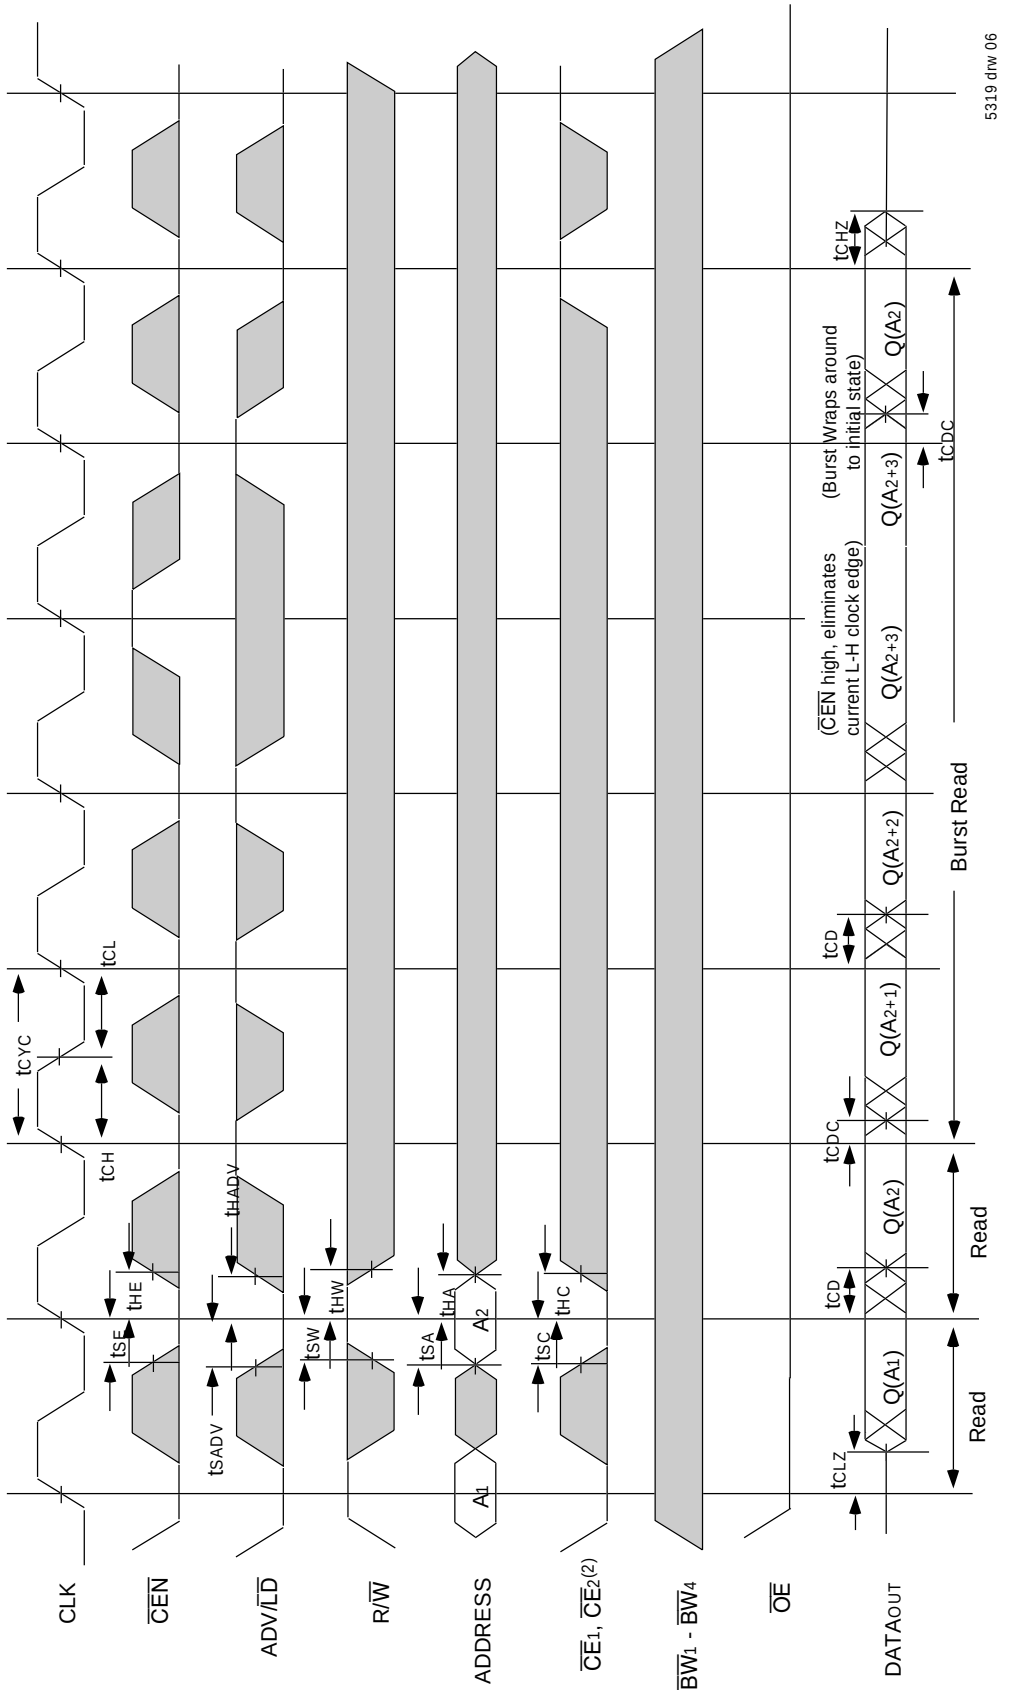

NOTES:
1. Q (A1) represents the first output from the external address A1. Q (A2) represents the first output from the external address A2; Q (A2+1) represents the next output data in the burst sequence of the base address A2, etc. where address bits A0 and A1 are advancing for the four word burst in the sequence defined by the state of the LBO input.
2. CE2 timing transitions are identical but inverted to the CE1 and CE2 signals. For example, when CE1 and CE2 are LOW on this waveform, CE2 is HIGH.
3. Burst ends when new address and control are loaded into the SRAM by sampling ADV/LD LOW.
4. R/W is don't care when the SRAM is bursting (ADV/LD sampled HIGH). The nature of the burst access (Read or Write) is fixed by the state of the R/W signal when new address and control are loaded into the SRAM.

© 2019 Renesas Electronics Corporation

Timing Waveform of Write Cycles(1,2,3,4,5)

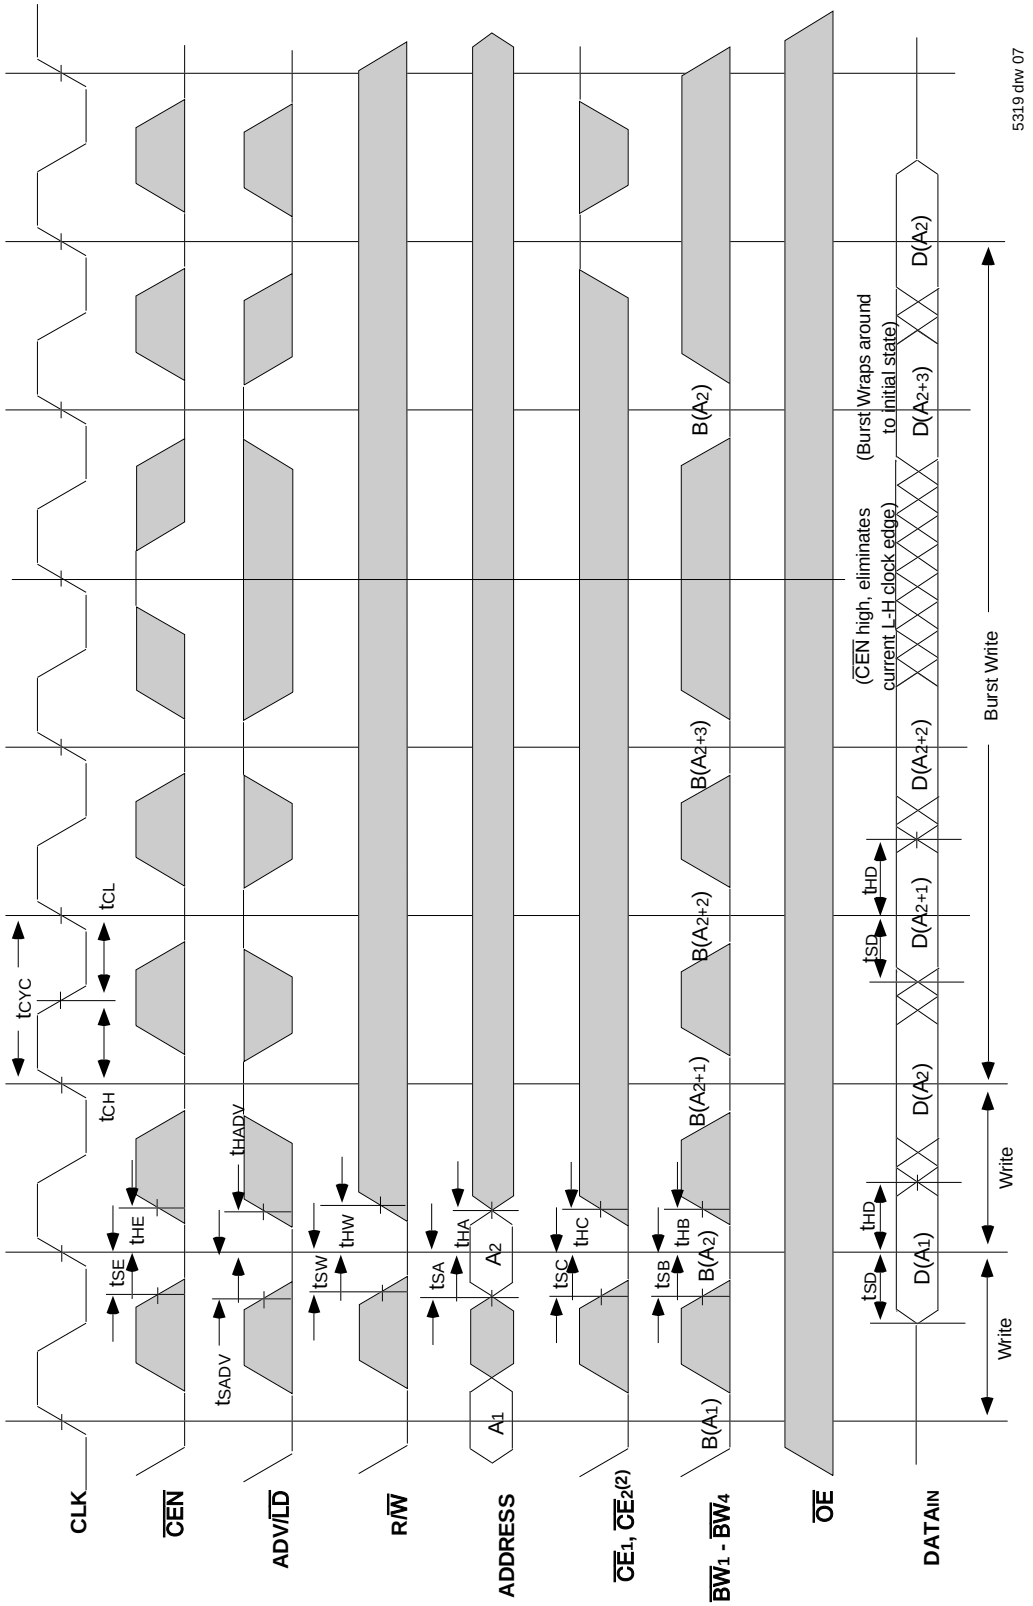


NOTES:

1. D (A_1) represents the first input to the external address A_1. D (A_2) represents the first input to the external address A_2; D (A_{2+1}) represents the next input data in the burst sequence of the base address A_2, etc. where address bits A_0 and A_1 are advancing for the four word burst in the sequence defined by the state of the $\overline{LBO}$ input.
2. CE_2 timing transitions are identical but inverted to the $\overline{CE}_1$ and $\overline{CE}_2$ signals. For example, when $\overline{CE}_1$ and $\overline{CE}_2$ are LOW on this waveform, CE_2 is HIGH.
3. Burst ends when new address and control are loaded into the SRAM by sampling ADV/$\overline{LD}$ LOW.
4. R/$\overline{W}$ is don't care when the SRAM is bursting (ADV/$\overline{LD}$ sampled HIGH). The nature of the burst access (Read or Write) is fixed by the state of the R/$\overline{W}$ signal when new address and control are loaded into the SRAM.
5. Individual Byte Write signals ($\overline{BWx}$) must be valid on all write and burst-write cycles. A write cycle is initiated when R/$\overline{W}$ signal is sampled LOW. The byte write information comes in one cycle before the actual data is presented to the SRAM.

© 2019 Renesas Electronics Corporation


Timing Waveform of Combined Read and Write Cycles(1,2,3)

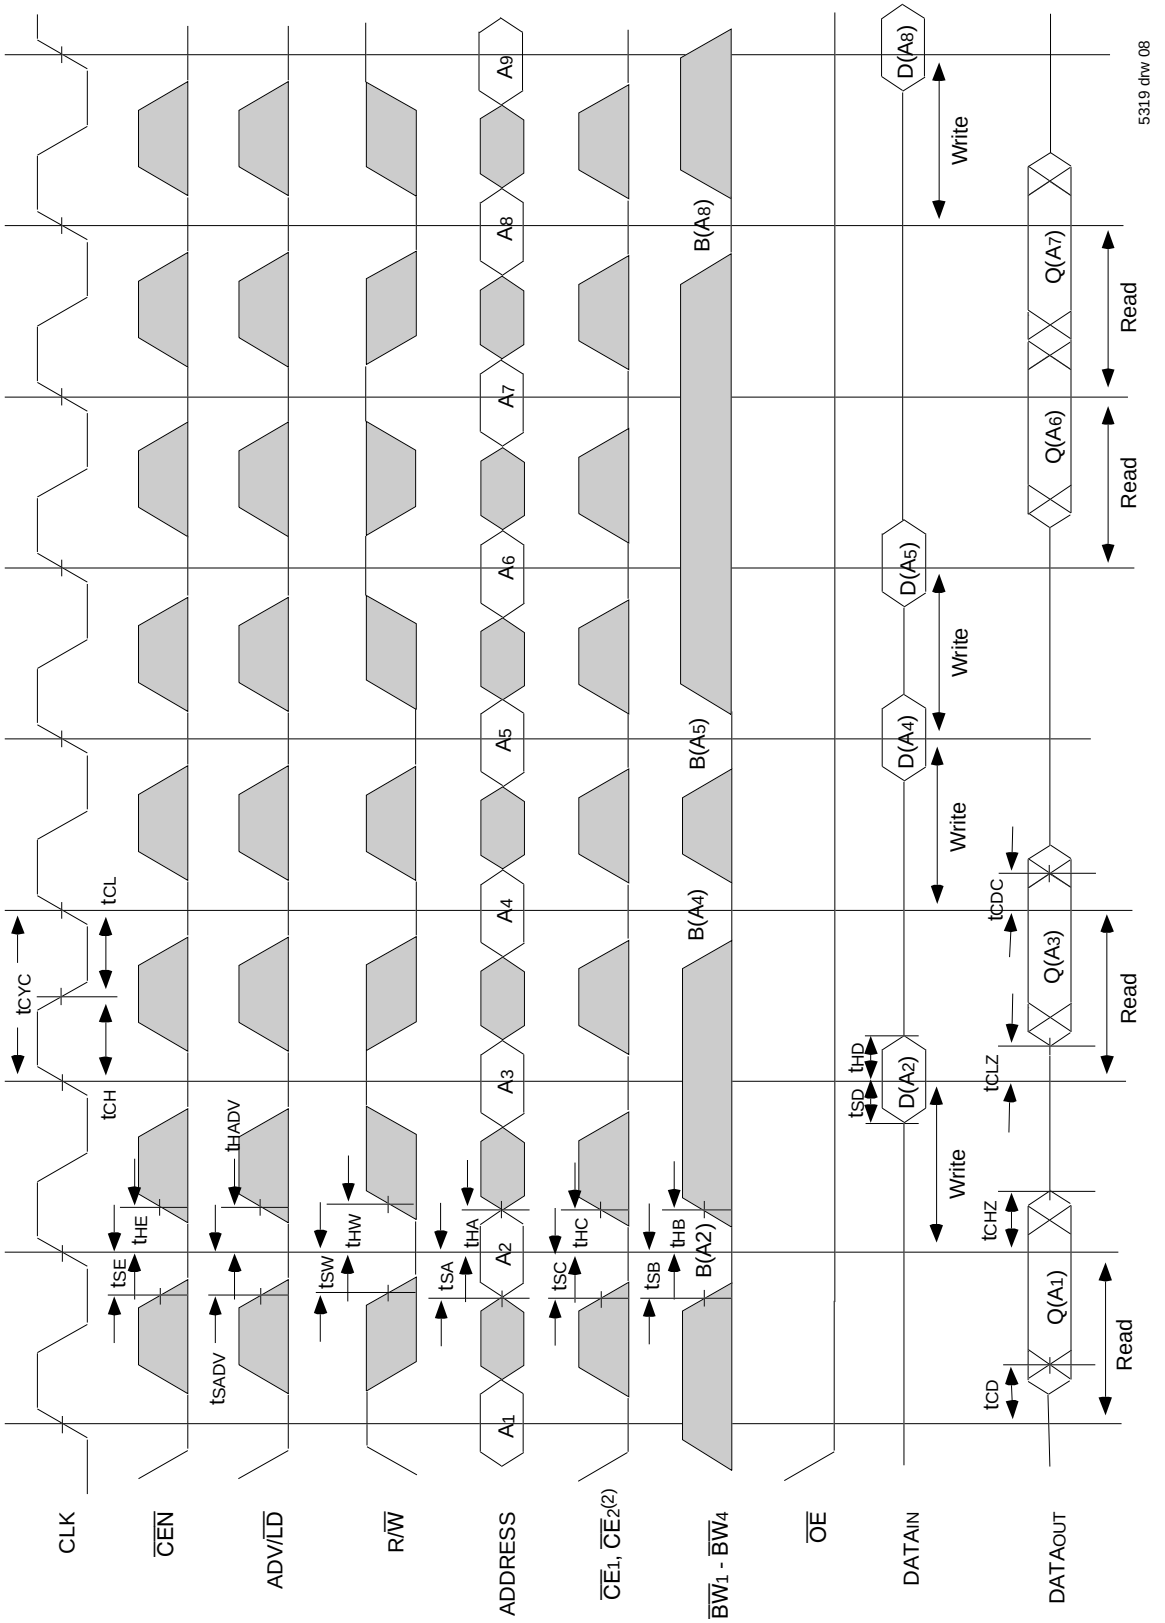

NOTES:
1. Q (A_1) represents the first output from the external address A_1. D (A_2) represents the input data to the SRAM corresponding to address A_2.
2. CE_2 timing transitions are identical but inverted to the $\overline{CE}_1$ and $\overline{CE}_2$ signals. For example, when $\overline{CE}_1$ and $\overline{CE}_2$ are LOW on this waveform, CE_2 is HIGH.
3. Individual Byte Write signals ($\overline{BW}x$) must be valid on all write and burst-write cycles. A write cycle is initiated when R/$\overline{W}$ signal is sampled LOW. The byte write information comes in one cycle before the actual data is presented to the SRAM.

© 2019 Renesas Electronics Corporation


Timing Waveform of $\overline{CEN}$ Operation(1,2,3,4)

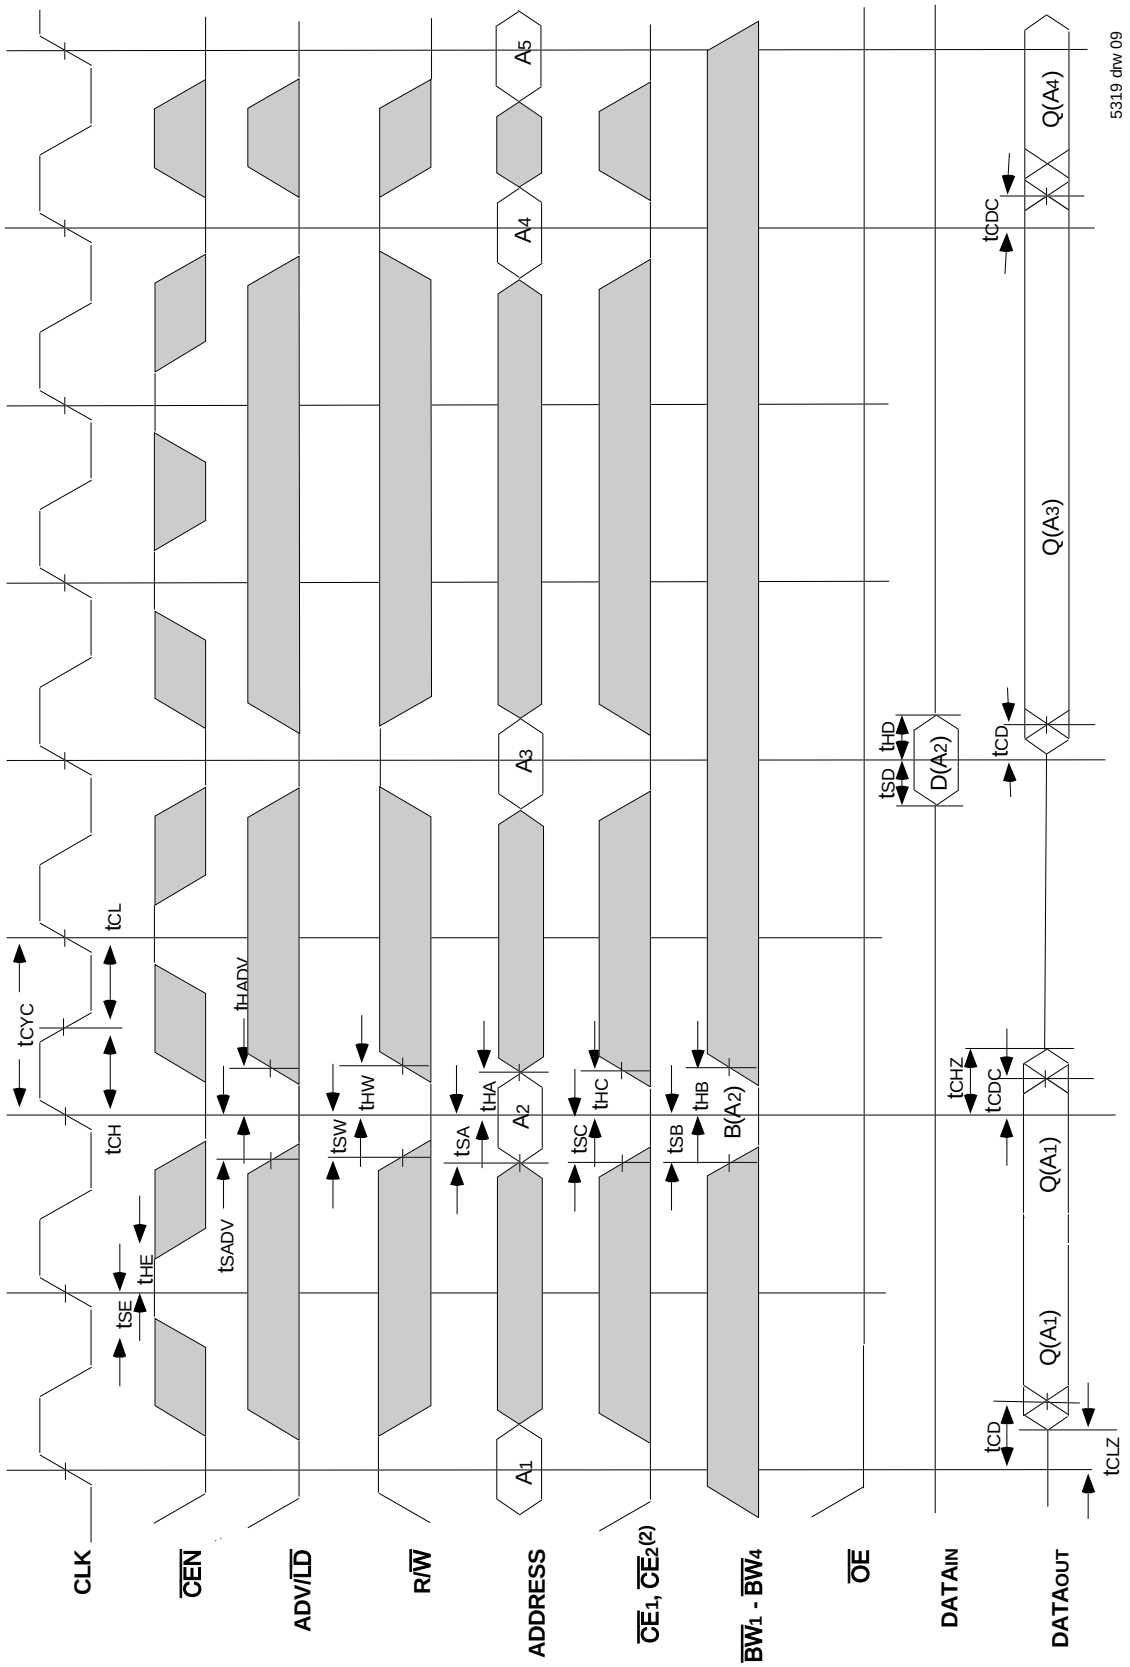

NOTES:
1. Q (A_1) represents the first output from the external address A_1. D (A_2) represents the input data to the SRAM corresponding to address A_2.
2. CE_2 timing transitions are identical but inverted to the $\overline{CE}_1$ and $\overline{CE}_2$ signals. For example, when $\overline{CE}_1$ and $\overline{CE}_2$ are LOW on this waveform, CE_2 is HIGH.
3. $\overline{CEN}$ when sampled high on the rising edge of clock will block that L-H transition of the clock from propogating into the SRAM. The part will behave as if the L-H clock transition did not occur. All internal registers in the SRAM will retain their previous state.
4. Individual Byte Write signals ($\overline{BW}x$) must be valid on all write and burst-write cycles. A write cycle is initiated when $R/\overline{W}$ signal is sampled LOW. The byte write information comes in one cycle before the actual data is presented to the SRAM.

© 2019 Renesas Electronics Corporation

Timing Waveform of $\overline{CS}$ Operation(1,2,3,4)

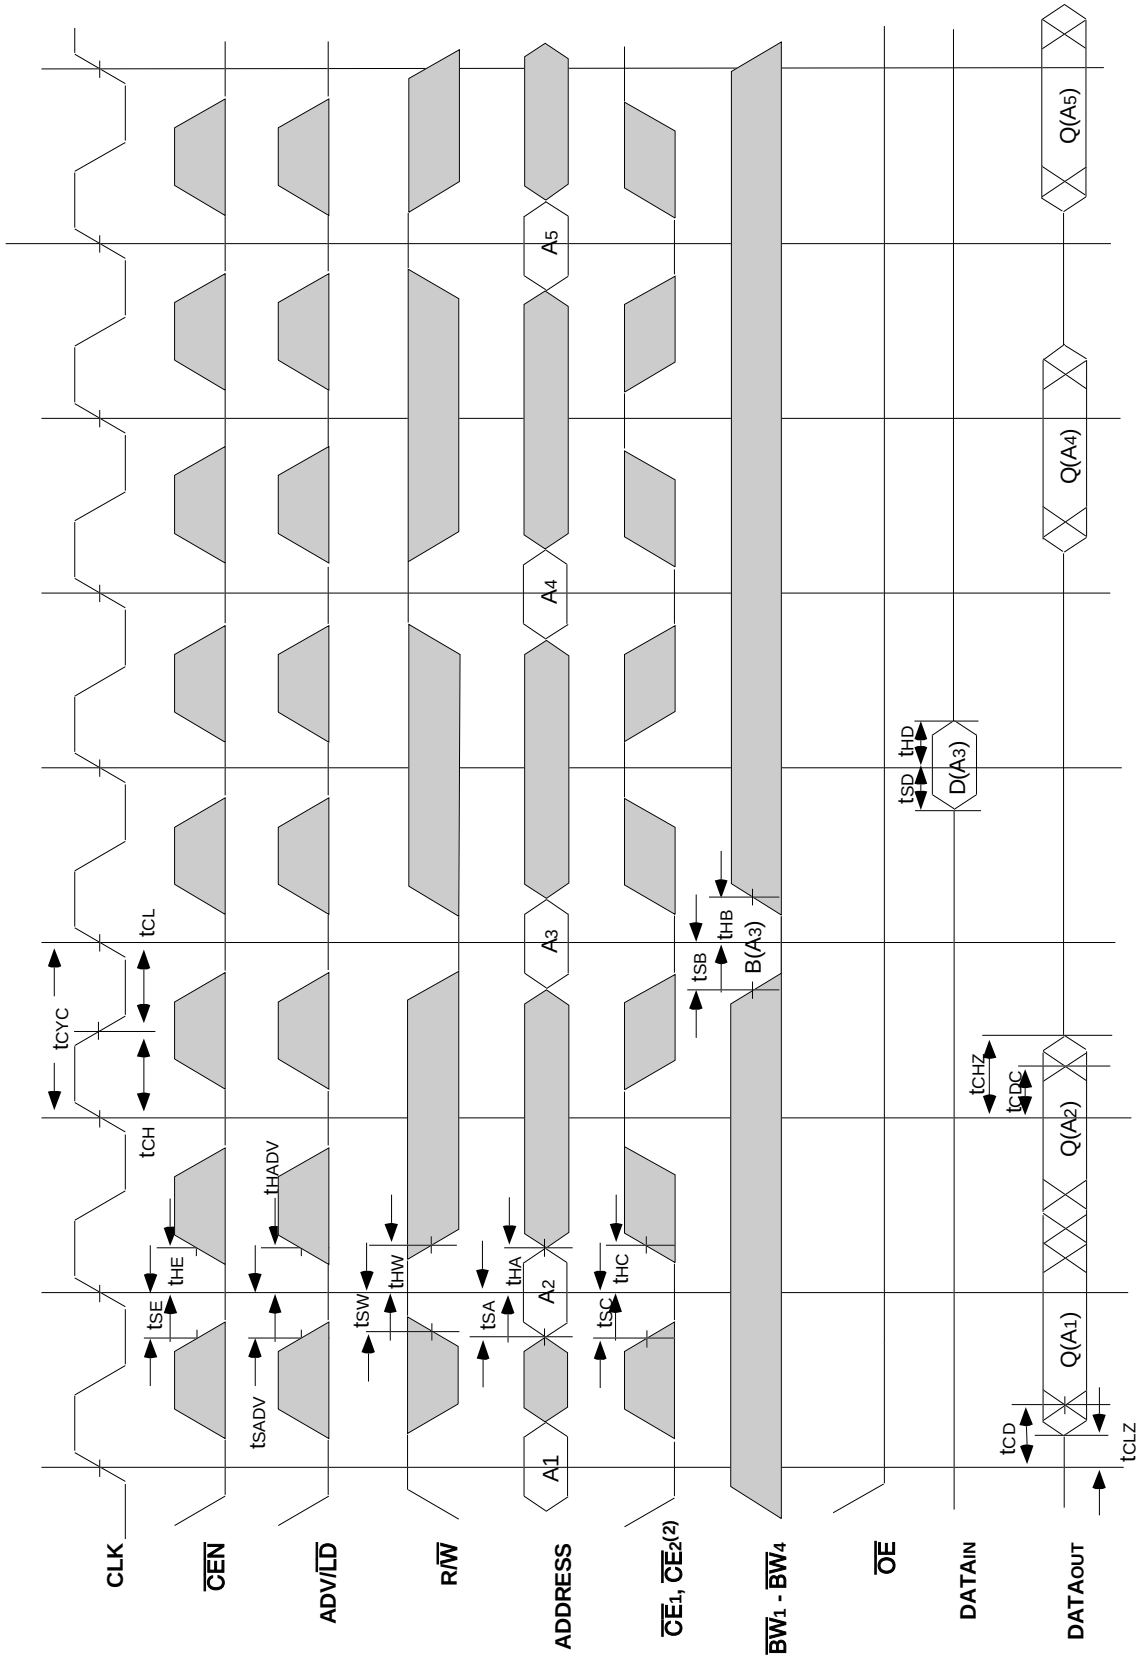


NOTES:

1. Q (A1) represents the first output from the external address A1. D (A3) represents the input data to the SRAM corresponding to address A3 etc.
2. CE2 timing transitions are identical but inverted to the $\overline{CE}_1$ and $\overline{CE}_2$ signals. For example, when $\overline{CE}_1$ and $\overline{CE}_2$ are LOW on this waveform, CE2 is HIGH.
3. When either one of the Chip enables ($\overline{CE}_1$, CE2, $\overline{CE}_2$) is sampled inactive at the rising clock edge, a deselect cycle is initiated. The data-bus tri-states one cycle after the initiation of the deselect cycle. This allows for any pending data transfers (reads or writes) to be completed.
4. Individual Byte Write signals ($\overline{BW}x$) must be valid on all write and burst-write cycles. A write cycle is initiated when R/$\overline{W}$ signal is sampled LOW. The byte write information comes in one cycle before the actual data is presented to the SRAM.

© 2019 Renesas Electronics Corporation

JTAG Interface Specification

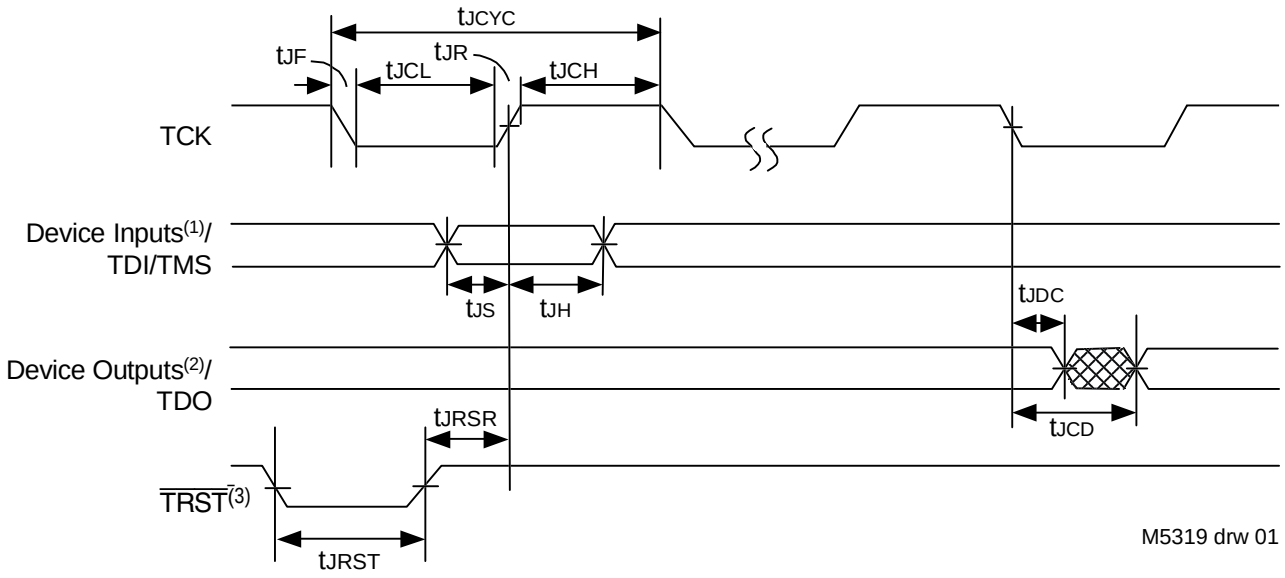

NOTES:
1. Device inputs = All device inputs except TDI, TMS and $\overline{\text{TRST}}$.
2. Device outputs = All device outputs except TDO.
3. During power up, $\overline{\text{TRST}}$ could be driven low or not be used since the JTAG circuit resets automatically. $\overline{\text{TRST}}$ is an optional JTAG reset.

JTAG AC Electrical Characteristics(1,2,3,4)

Symbol	Parameter	Min.	Max.	Units
t_{JCYC}	JTAG Clock Input Period	100	—	ns
t_{JCH}	JTAG Clock HIGH	40	—	ns
t_{JCL}	JTAG Clock Low	40	—	ns
t_{JR}	JTAG Clock Rise Time	—	5(1)	ns
t_{JF}	JTAG Clock Fall Time	—	5(1)	ns
t_{JRST}	JTAG Reset	50	—	ns
t_{JRSR}	JTAG Reset Recovery	50	—	ns
t_{JCD}	JTAG Data Output	—	20	ns
t_{JDC}	JTAG Data Output Hold	0	—	ns
t_{JS}	JTAG Setup	25	—	ns
t_{JH}	JTAG Hold	25	—	ns

5319 tbl 01

NOTES:
1. Guaranteed by design.
2. AC Test Load (Fig. 1) on external output signals.
3. Refer to AC Test Conditions stated earlier in this document.
4. JTAG operations occur at one speed (10MHz). The base device may run at any speed specified in this datasheet.

Scan Register Sizes

Register Name	Bit Size
Instruction (IR)	4
Bypass (BYR)	1
JTAG Identification (JIDR)	32
Boundary Scan (BSR)	Note (1)

5319 tbl 03

NOTE:
1. The Boundary Scan Descriptive Language (BSDL) file for this device is available by contacting your local IDT sales representative.

© 2019 Renesas Electronics Corporation

JTAG Identification Register Definitions

Instruction Field	Value	Description
Revision Number (31:28)	0x2	Reserved for version number.
IDT Device ID (27:12)	0x221, 0x223	Defines IDT part number 71T75702 and 71T75902, respectively.
IDT JEDEC ID (11:1)	0x33	Allows unique identification of device vendor as IDT.
ID Register Indicator Bit (Bit 0)	1	Indicates the presence of an ID register.

I5319 tbl 02

Available JTAG Instructions


Instruction	Description	OPCODE
EXTEST	Forces contents of the boundary scan cells onto the device outputs[1]. Places the boundary scan register (BSR) between TDI and TDO.	0000
SAMPLE/PRELOAD	Places the boundary scan register (BSR) between TDI and TDO. SAMPLE allows data from device inputs[2] and outputs[1] to be captured in the boundary scan cells and shifted serially through TDO. PRELOAD allows data to be input serially into the boundary scan cells via the TDI.	0001
DEVICE_ID	Loads the JTAG ID register (JIDR) with the vendor ID code and places the register between TDI and TDO.	0010
HIGHZ	Places the bypass register (BYR) between TDI and TDO. Forces all device output drivers to a High-Z state.	0011
RESERVED	Several combinations are reserved. Do not use codes other than those identified for EXTEST, SAMPLE/PRELOAD, DEVICE_ID, HIGHZ, CLAMP, VALIDATE and BYPASS instructions.	0100
RESERVED		0101
RESERVED		0110
RESERVED		0111
CLAMP	Uses BYR. Forces contents of the boundary scan cells onto the device outputs. Places the bypass register (BYR) between TDI and TDO.	1000
RESERVED	Same as above.	1001
RESERVED		1010
RESERVED		1011
RESERVED		1100
VALIDATE	Automatically loaded into the instruction register whenever the TAP controller passes through the CAPTURE-IR state. The lower two bits '01' are mandated by the IEEE std. 1149.1 specification.	1101
RESERVED	Same as above.	1110
BYPASS	The BYPASS instruction is used to truncate the boundary scan register as a single bit in length.	1111

I5319tbl 04

NOTES:
1. Device outputs = All device outputs except TDO.
2. Device inputs = All device inputs except TDI, TMS, and $\overline{TRST}$.

© 2019 Renesas Electronics Corporation

100 Pin Thin Quad Plastic Flatpack (TQFP) Package Diagram Outline

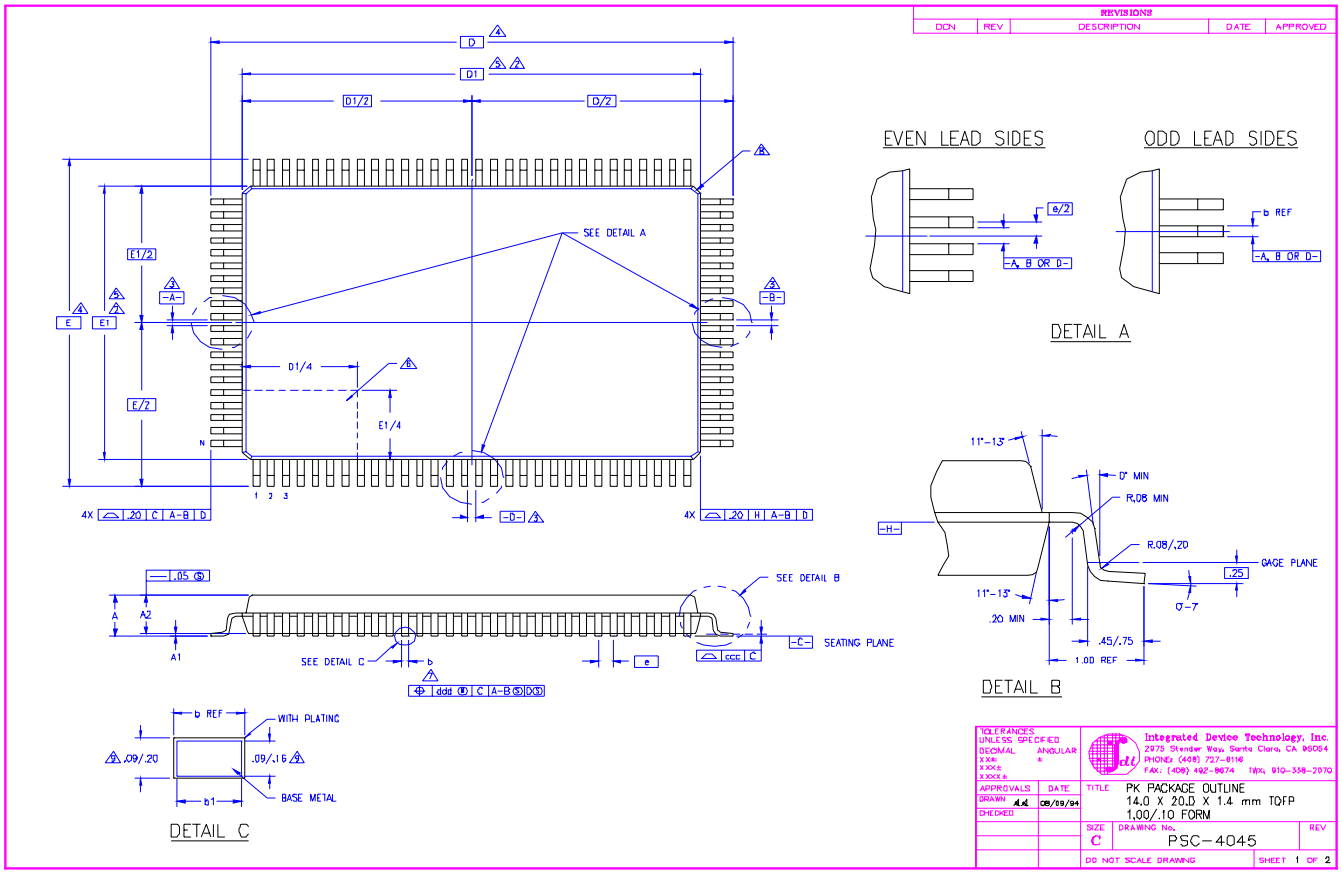

SYMBOL	JEDEC VARIATION DJ MIN	DJ NOM	DJ MAX	NOTE
A	–	–	1.60	
A1	.05	.10	.15	
A2	1.35	1.40	1.45	
D		22.00 BSC		4
D1		20.00 BSC		5,2
E		16.00 BSC		4
E1		14.00 BSC		5,2
N		100		
ND		30		
NE		20		
e		.65 BSC		
b	.22	.32	.38	7
b1	.22	.30	.33	
ccc	–	–	.10	
ddd	–	–	.13	

NOTES:

1 ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M–1982

2 TOP PACKAGE MAY BE SMALLER THAN BOTTOM PACKAGE BY .15 mm

3 DATUMS A–B AND –D– TO BE DETERMINED AT DATUM PLANE –H–

4 DIMENSIONS D AND E ARE TO BE DETERMINED AT SEATING PLANE –C–

5 DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION IS .25 mm PER SIDE. D1 AND E1 ARE MAXIMUM BODY SIZE DIMENSIONS INCLUDING MOLD MISMATCH

6 DETAILS OF PIN 1 IDENTIFIER IS OPTIONAL BUT MUST BE LOCATED WITHIN THE ZONE INDICATED

7 DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION IS .08 mm IN EXCESS OF THE b DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT.


8 EXACT SHAPE OF EACH CORNER IS OPTIONAL

9 THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .10 AND .25 mm FROM THE LEAD TIP

10 ALL DIMENSIONS ARE IN MILLIMETERS

11 THIS OUTLINE CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MO–136, VARIATION DJ AND BX

LAND PATTERN DIMENSIONS

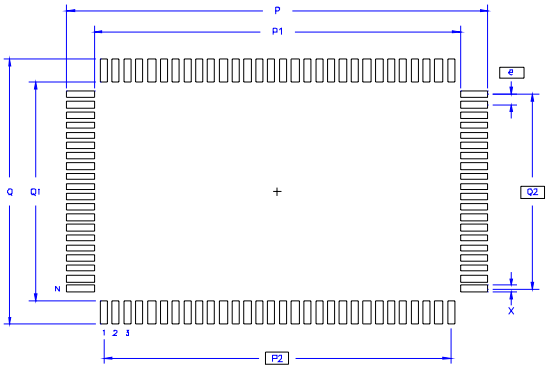


	MIN	MAX
P	22.80	23.00
P1	19.80	20.00
P2	18.85 BSC	
Q	16.80	17.00
Q1	13.80	14.00
Q2	12.35 BSC	
X	.30	.50
e	.65 BSC	
N	100	

REVISIONS
DCN REV DESCRIPTION DATE APPROVED
Integrated Device Technology, Inc.
2975 Stender Way, Santa Clara, CA 95054
PHONE: (408) 727-6116
FAX: (408) 492-8674
TWX: 910-338-2070
TITLE PK PACKAGE OUTLINE
14.0 X 20.0 X 1.4 mm TQFP
1.00/.10 FORM
SIZE C
DRAWING No. PSC-4045
REV
DO NOT SCALE DRAWING
SHEET 2 OF 2

© 2019 Renesas Electronics Corporation


119 Ball Grid Array (BGA) Package Diagram Outline

REVISIONS				
DCN	REV	DESCRIPTION	DATE	APPROVED
60626	00	INITIAL RELEASE	10/15/97	T. VU
	01	SWITCH E & D DIMENSIONS	04/25/00	T. VU
	02	CHANGE PACKAGE THICKNESS	06/05/00	T. VU
	OBS	ACTIVE/INACTIVE	08/29/03	T. VU
	03	REVIVE FROM OBSOLETE	10/2/03	T. VU

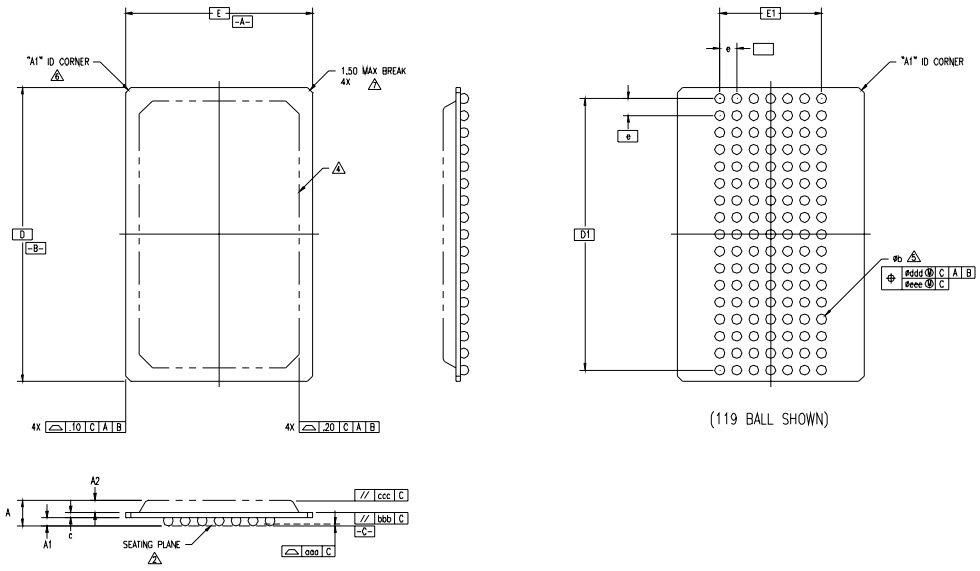

(119 BALL SHOWN)

TOLERANCES UNLESS SPECIFIED		Integrated Device Technology, Inc. 2975 Stender Way, Santa Clara, CA 95054 PHONE: (408) 727-6116 FAX: (408) 492-8674 TWX: 910-338-2070	
DECIMAL ANGULAR			
XX± ±			
XXX±			
XXXX±			
APPROVALS	DATE	TITLE	BG PACKAGE OUTLINE 14.0 X 22.0 mm BODY PBGA
DRAWN JTJ	10/15/97		
CHECKED		SIZE C	DRAWING No. PSC-4063 REV 03
		DO NOT SCALE DRAWING	SHEET 1 OF 2



(119 BALL)

SYMBOL	JEDEC VARIATION AA			NOTE
	MIN	NOM	MAX	
A	–	2.15	2.36	
A1	.50	.60	.70	
A2	–	–	1.20	
D	22.00 BSC			
D1	20.32 BSC			
E	14.00 BSC			
E1	7.62 BSC			
MD	17			3
ME	7			3
N	119			3
e	1.27 BSC			
b	.60	.75	.90	5
c	.51	.56	.61	
aaa	–	–	.15	
bbb	–	–	.25	
ccc	–	–	.35	
ddd	–	–	.30	
eee	–	–	.10	

REVISIONS				
DCN	REV	DESCRIPTION	DATE	APPROVED
60626	00	INITIAL RELEASE	10/15/97	T. VU
	01	SWITCH E & D DIMENSIONS	04/25/00	T. VU
	02	CHANGE PACKAGE THICKNESS	06/05/00	T. VU
	OBS	ACTIVE/INACTIVE	8/29/03	T. VU
	03	REVIVE FROM OBSOLETE	10/2/03	T. VU


NOTES:

1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
2. SEATING PLANE AND PRIMARY DATUM -C- ARE DEFINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS
3. "MD" IS THE BALL MATRIX SIZE IN THE "D" DIRECTION
   "ME" IS THE BALL MATRIX SIZE IN THE "E" DIRECTION
   "N" IS THE MAXIMUM ALLOWABLE NUMBER OF SOLDER BALLS
4. PACKAGE MAY EXTEND TO EDGE PERIPHERY AND MAY CONSIST OF MOLDING COMPOUND, EPOXY, METAL, CERAMIC OR OTHER MATERIAL
5. DIMENSION "b" IS MEASURED AT THE MAXIMUM SOLDER BALL DIAMETER, PARALLEL TO PRIMARY DATUM -C-
6. "A1" ID CORNER MUST BE IDENTIFIED. IDENTIFICATION MAY BE BY MEANS OF CHAMFER, METALLIZED OR INK MARK, INDENTATION OR OTHER FEATURE OF THE PACKAGE BODY. MARK MUST BE VISIBLE FROM TOP SURFACE
7. ACTUAL SHAPE OF THIS FEATURE IS OPTIONAL
8. ALL DIMENSIONS ARE IN MILLIMETERS
9. THIS DRAWING CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MS-028, VARIATION AA

TOLERANCES UNLESS SPECIFIED		Integrated Device Technology, Inc. 2975 Stender Way, Santa Clara, CA 95054 PHONE: (408) 727-6116 FAX: (408) 492-8674 TWX: 910-338-2070	
DECIMAL ANGULAR			
XX± ±			
XXX±			
XXXX±			
APPROVALS	DATE	TITLE	BG PACKAGE OUTLINE 14.0 X 22.0 mm BODY PBGA
DRAWN JTJ	10/15/97		
CHECKED		SIZE C	DRAWING No. PSC-4063 REV 03
		DO NOT SCALE DRAWING	SHEET 2 OF 2

© 2019 Renesas Electronics Corporation


Timing Waveform of $\overline{OE}$ Operation(1)

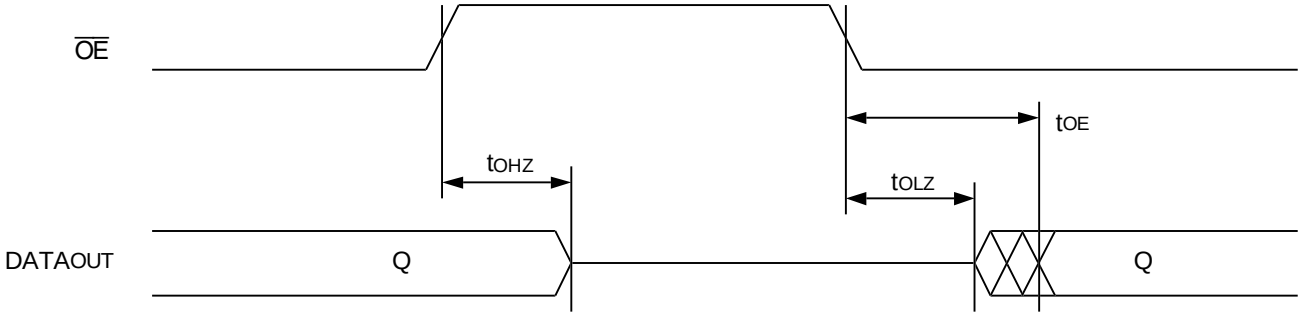

5319 drw 11

NOTE:
1. A read operation is assumed to be in progress.

Ordering Information

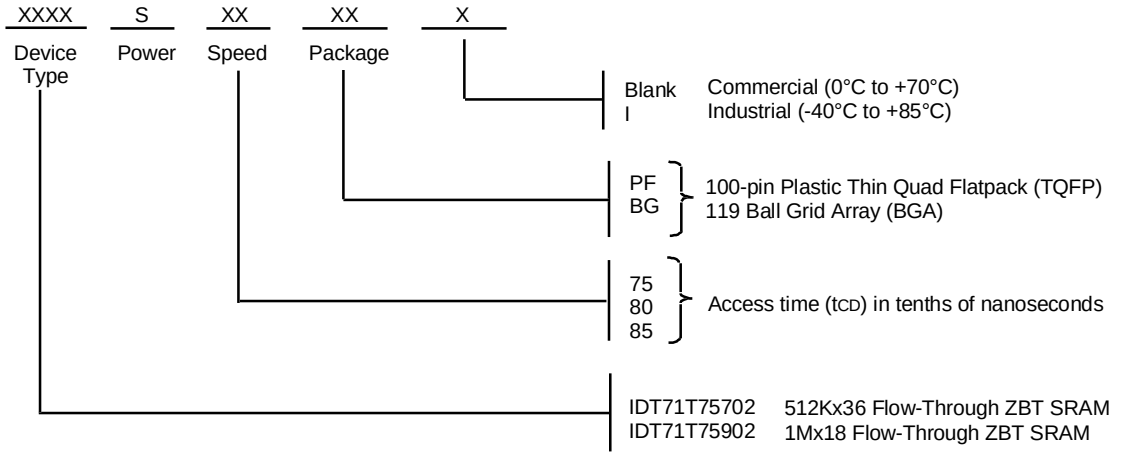

5319 drw 12

© 2019 Renesas Electronics Corporation

Datasheet Document History

Rev	Date	Pages	Description
0	05/25/00		Created Advance Information Datasheet
1	08/24/01	p. 1, 25	Removed reference of BQ165 package
		p. 8	Removed page of the 165 BGA pin configuration
		p. 24	Removed page of the 165 BGA package diagram outline
2	10/16/01	p. 7	Corrected 3.3V to 2.5V in Note 3
3	12/21/01	p. 5-7	Added clarification to JTAG pins, allow for NC. Added 36M address pin locations
4	05/29/02	p. 21	Corrected 100-pin TQFP package drawing
5	06/07/02	p. 1-4,7,14,21,22	Added complete JTAG functionality.
		p. 2,14	Added notes for ZZ pin internal pulldown and ZZ leakage current.
		p. 14	Updated ISB3 power supply current from 40 to 60mA for all speeds.
6	11/19/02	p.1-26	Changed datasheet from Advanced information to final release.
7	05/23/03	p.5,6,14,15,25	Added I-temp to the datasheet.
		p.6	Updated 165 BGA table.
8	02/29/04	p.1	Updated logo with new design.
		p.5,6	Clarified ambient and case operating temperatures. Updated recommended operating temperature and supply voltage table and removed note 1.
		p.7	Updated I/O pin number order for the 119 BGA.
9	02/20/09	p.25	Removed "IDT" from orderable parts number
10	07/28/08:		PDN SR-08-03R2 issued. See IDT.com for PDN specifics
	05/13/15:		71T75702 Datasheet changed to Obsolete Status

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

© 2020 Renesas Electronics Corporation. All rights reserved.