



光谱图

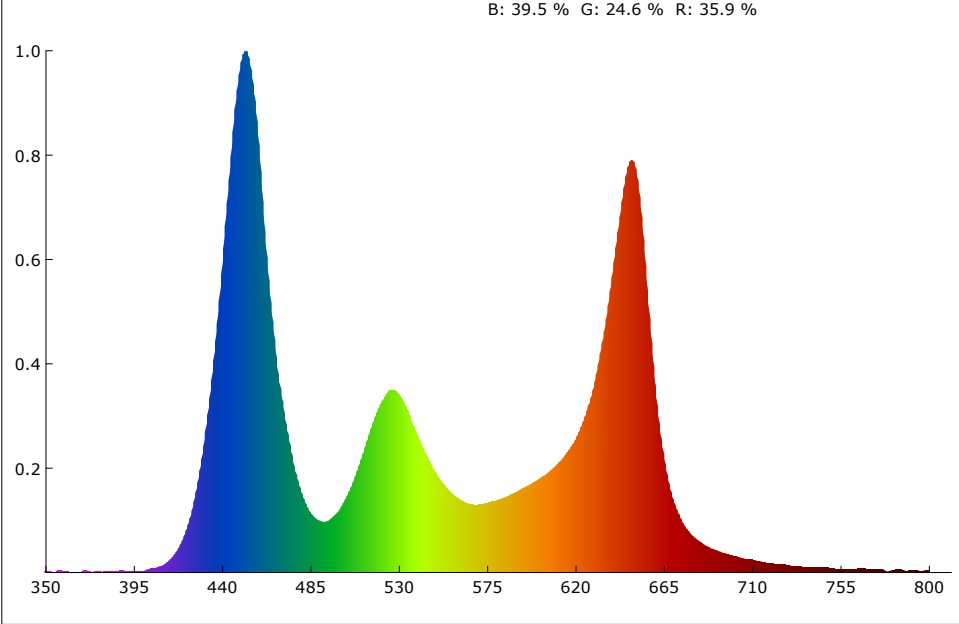

SDCM

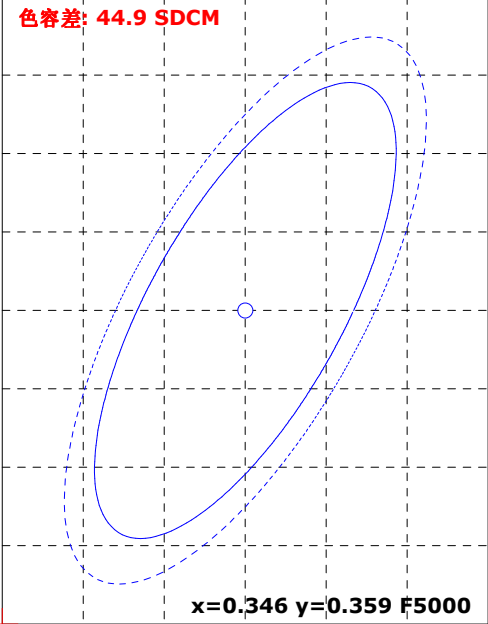

颜色参数:

坐标x: 0.2879 坐标y: 0.2284 坐标u: 0.2230 坐标v: 0.2653 坐标u': 0.2230 坐标v': 0.3979
红色比: 35.9 % 绿色比: 24.6 % 蓝色比: 39.5 % 光通量红色比: 23.4 % 光通量绿色比: 69.7 % 光通量蓝色比: 6.8 %

显色指数: 38.9 AvgR: 28.0
R1: 21.3 R2: 67.6 R3: 49.0 R4: 20.8 R5: 38.5 R6: 71.6 R7: 60.5 R8: -17.8
R9: -99.0 R10: 48.2 R11: 7.1 R12: 64.8 R13: 30.6 R14: 65.4 R15: -8.4


色温: 18539 K 光通量: 4071.626 lm 峰值波长: 452.3 nm 色容差: 44.9
明暗视觉比: 2.9 中心波长: 451.9 nm 主波长: 0.0 nm 质心波长: 546.2 nm
半宽度: 27.0 nm 色偏差: -0.04087 色纯度: 0.0 % 色质指数: 80.1
LER(TM-30): 195.4 辐射功率: 20839.1 mw 色域指数(Rg): 126.8 逼真度(Rf): 57.1
红光辐射功率: 7370.7 mw 近红辐射功率: 269.0 mw 远红辐射功率: 24.8 mw

电参数:







光效: 9.9 Lm/W 能效: 10.7 能效等级: G
电压: 218.2 V 电流: 2.544 A 功率: 413.200 W 功率因素: 0.744

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:05/30/14
备注:

Rf: 57.1 CCT: 18539K u': 0.2230
Rg: 126.8 LER: 195.4 Duv: -0.04087 v': 0.3979

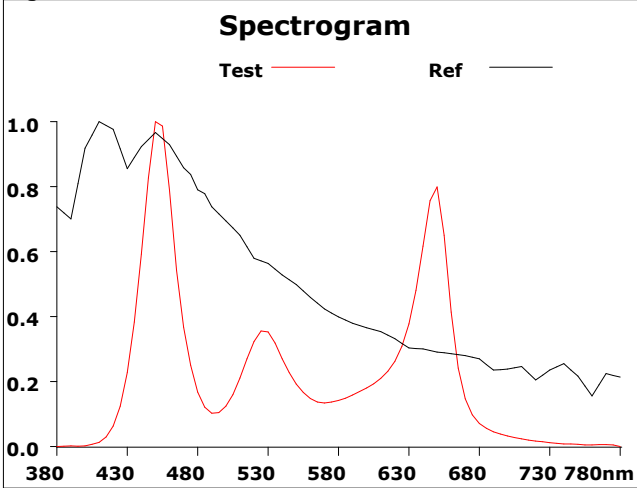

500			
Hue Bin	Rf	Chroma	Hue
1	26.0	37.6%	6.2%
2	53.7	18.1%	-4.3%
3	58.6	16.0%	-14.1%
4	76.2	5.6%	-1.7%
5	76.3	0.8%	3.9%
6	66.6	10.1%	15.8%
7	61.5	4.6%	10.5%
8	62.9	15.4%	15.4%
9	72.3	10.3%	9.3%
10	77.2	2.4%	16.2%
11	55.0	2.0%	19.4%
12	46.0	-9.3%	42.7%
13	30.5	-2.8%	42.5%
14	23.3	10.2%	46.8%
15	21.8	43.2%	51.5%
16	38.8	22.7%	17.0%

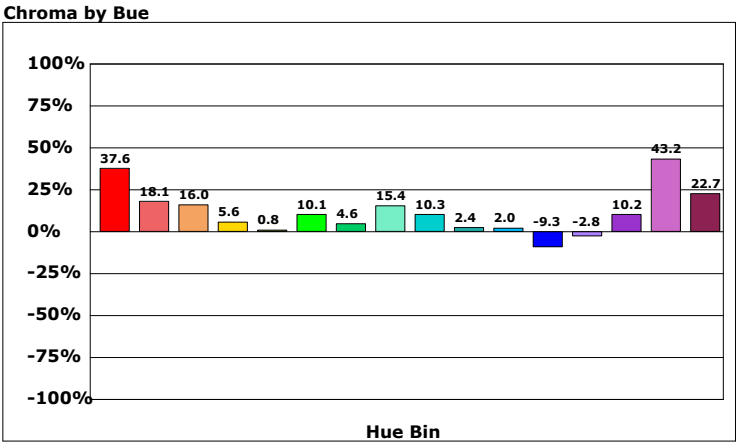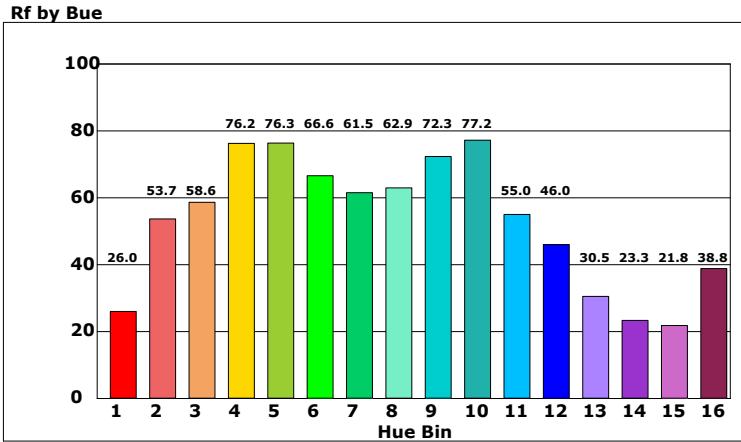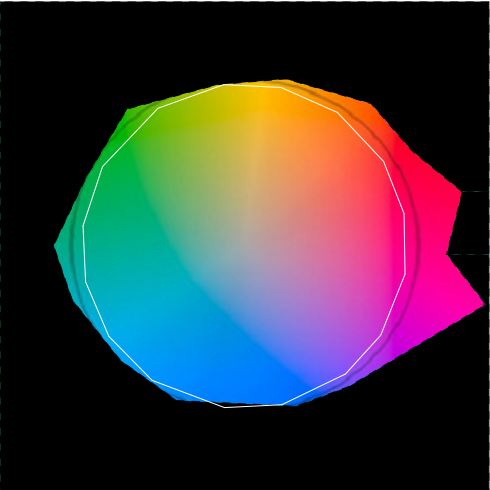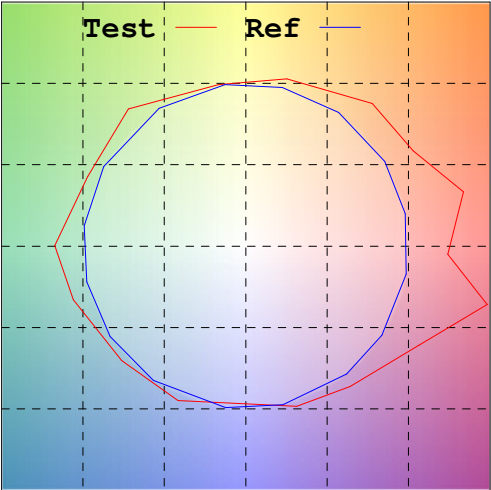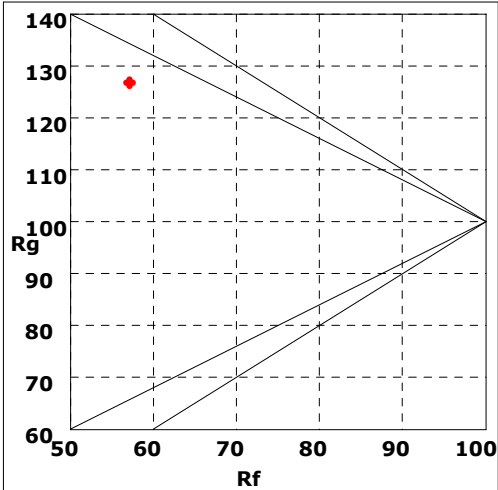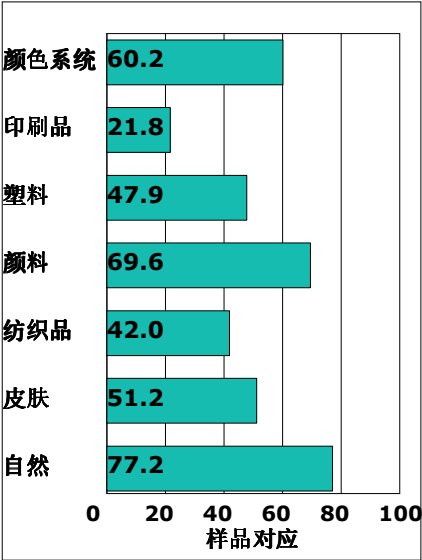

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:05/30/14

