



光谱图

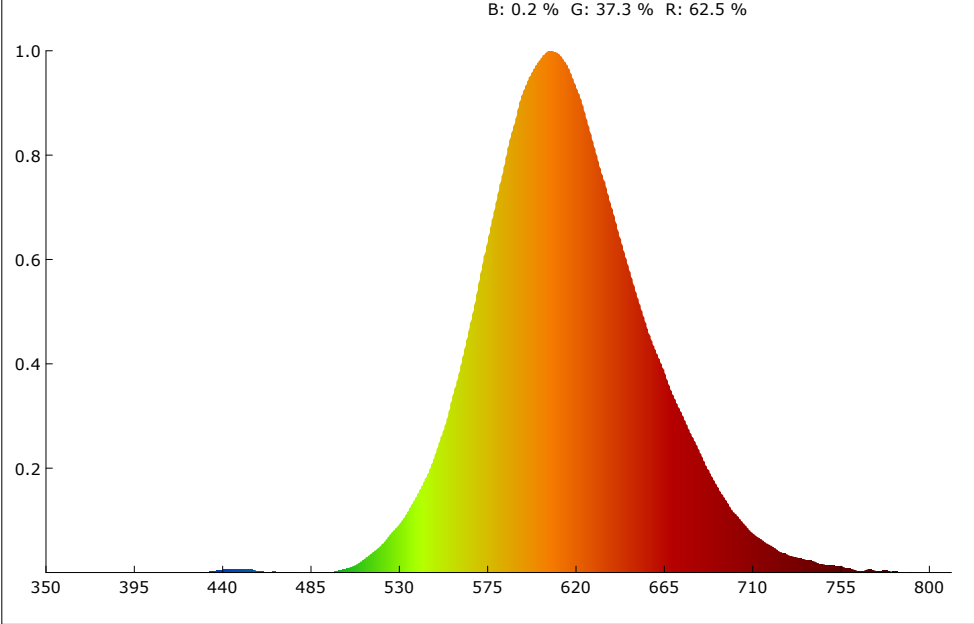

SDCM

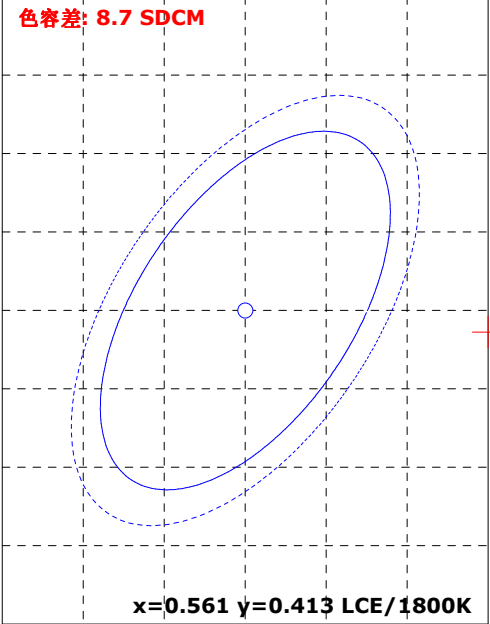

颜色参数:

坐标x: 0.5762 坐标y: 0.4186 坐标u: 0.3354 坐标v: 0.3655 坐标u': 0.3354 坐标v': 0.5483
红色比: 62.5 % 绿色比: 37.3 % 蓝色比: 0.2 % 光通量红色比: 34.3 % 光通量绿色比: 65.6 % 光通量蓝色比: 0.0 %

显色指数: 51.9 AvgR: 40.5
R1: 45.0 R2: 73.6 R3: 88.3 R4: 33.0 R5: 38.7 R6: 63.2 R7: 62.9 R8: 10.8
R9: -72.4 R10: 47.4 R11: 13.9 R12: 23.8 R13: 47.8 R14: 94.1 R15: 37.9


色温: 1682 K 光通量: 1359.192 lm 峰值波长: 608.7 nm 色容差: 8.7
明暗视觉比: 0.4 中心波长: 610.8 nm 主波长: 590.8 nm 质心波长: 615.1 nm
半宽度: 85.4 nm 色偏差: 0.00501 色纯度: 98.6 % 色质指数: 27.9
LER(TM-30): 326.2 辐射功率: 4166.4 mw 色域指数(Rg): 41.5 逼真度(Rf): 42.1
红光辐射功率: 2532.0 mw 近红辐射功率: 114.3 mw 远红辐射功率: 1.0 mw

电参数:






光效: 13.1 Lm/W 能效: 14.3 能效等级: G
电压: 219.4 V 电流: 0.724 A 功率: 103.800 W 功率因素: 0.653

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:05/30/14
备注:

Rf: 42.1 CCT: 1682K u': 0.3354
Rg: 41.5 LER: 326.2 Duv: 0.00501 v': 0.5483

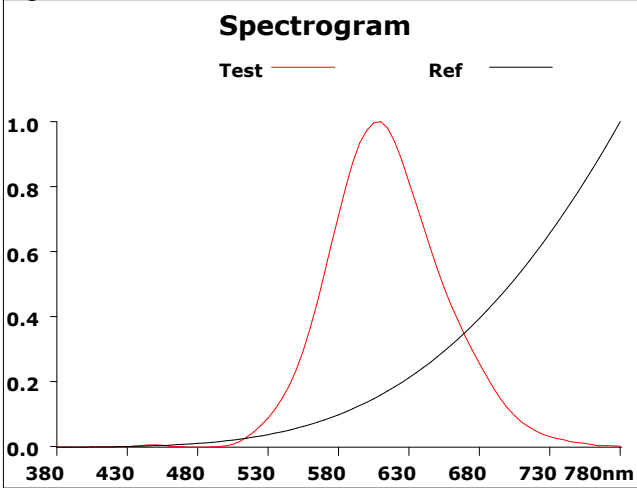

500			
Hue Bin	Rf	Chroma	Hue
1	39.0	-25.9%	-12.3%
2	28.5	-33.7%	-17.0%
3	7.0	-48.0%	-15.4%
4	38.3	-52.2%	-4.7%
5	60.5	-48.8%	9.0%
6	46.0	-34.4%	20.6%
7	41.0	-30.8%	12.3%
8	54.5	-31.2%	-0.1%
9	42.6	-24.6%	-11.9%
10	37.8	-35.5%	-9.2%
11	32.0	-36.0%	2.9%
12	28.3	-36.1%	14.9%
13	51.6	-37.6%	11.9%
14	57.4	-35.6%	-0.2%
15	62.4	-22.3%	3.2%
16	56.1	-24.3%	-3.8%

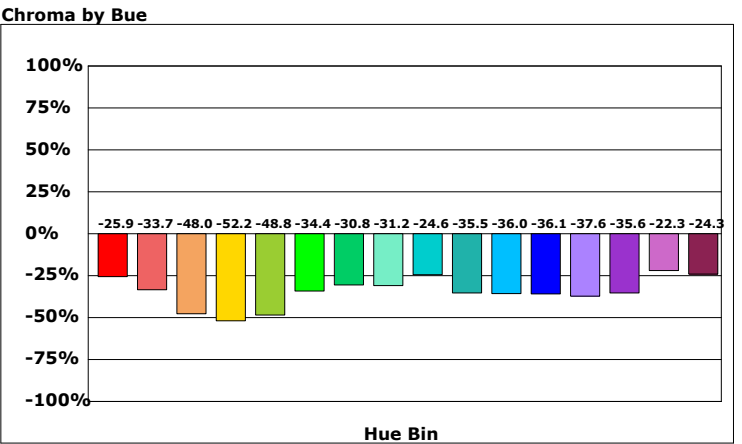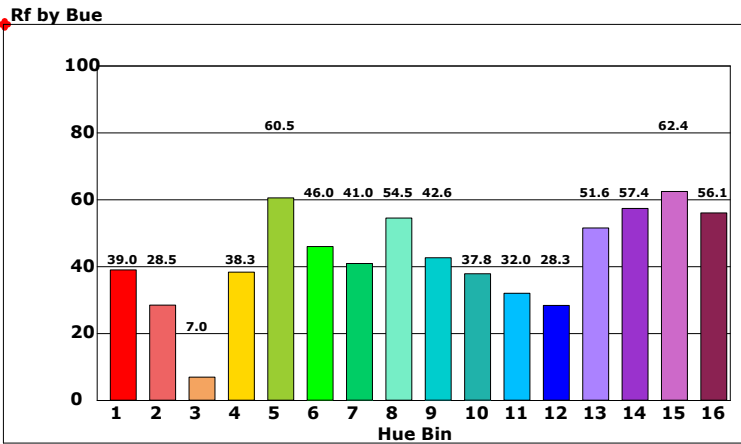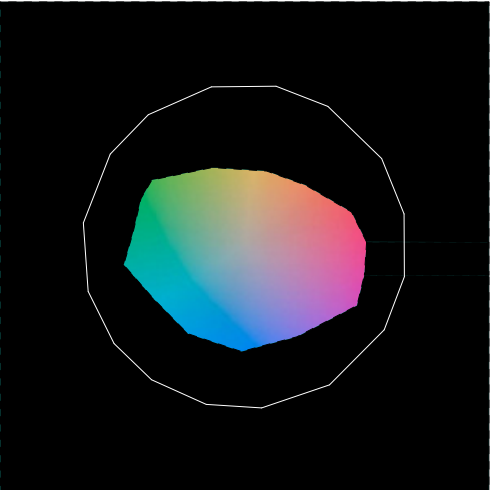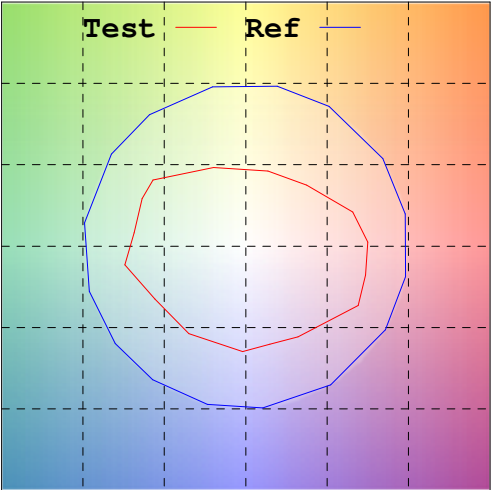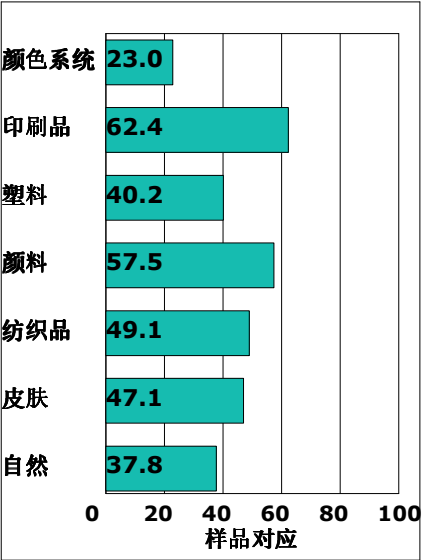

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:05/30/14

