



光谱图

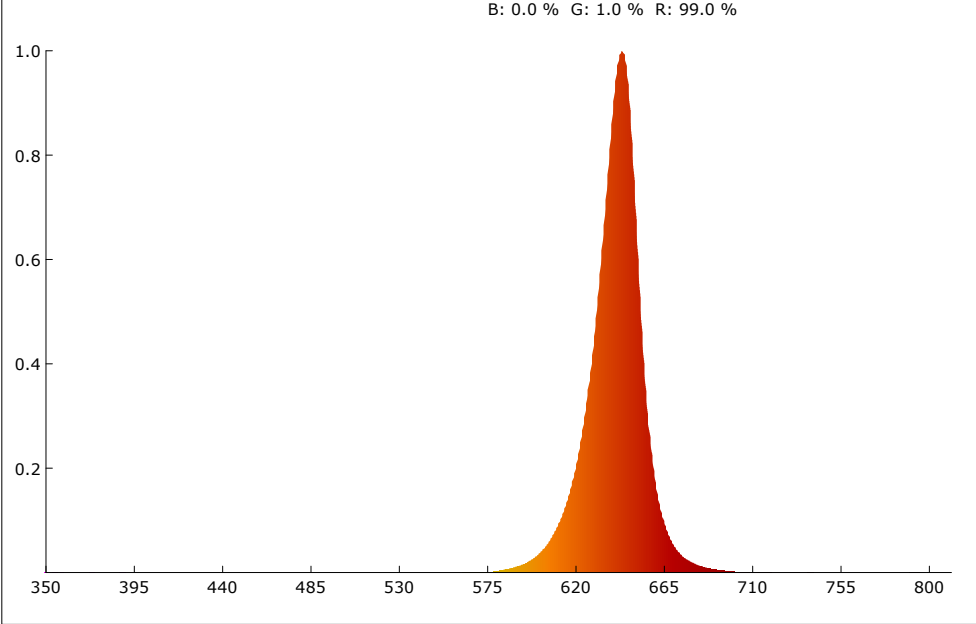

SDCM

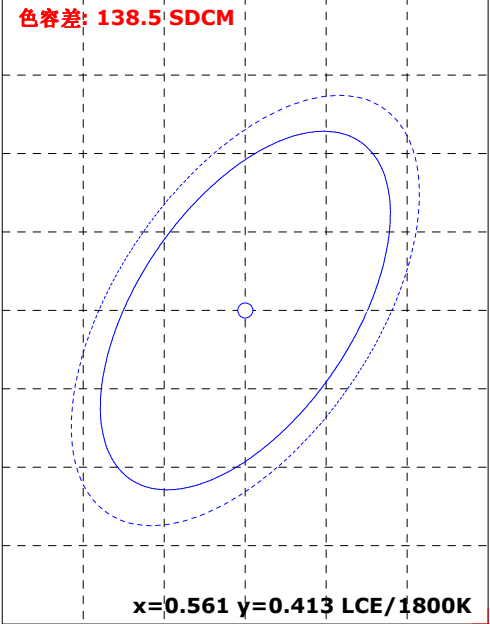

颜色参数:

坐标x: 0.7049 坐标y: 0.2948 坐标u: 0.5499 坐标v: 0.3449 坐标u': 0.5499 坐标v': 0.5174
红色比: 99.0 % 绿色比: 1.0 % 蓝色比: 0.0 % 光通量红色比: 95.6 % 光通量绿色比: 4.4 % 光通量蓝色比: 0.0 %

显色指数: 22.2 AvgR: 19.2
R1: 5.4 R2: 72.4 R3: 44.8 R4: -13.4 R5: 12.8 R6: 86.0 R7: 17.5 R8: -47.5
R9: -99.0 R10: 66.3 R11: -5.4 R12: 81.2 R13: 25.1 R14: 66.4 R15: -24.0


色温: 1000 K 光通量: 903.147 lm 峰值波长: 643.9 nm 色容差: 138.5
明暗视觉比: 0.0 中心波长: 642.1 nm 主波长: 628.0 nm 质心波长: 640.5 nm
半宽度: 22.2 nm 色偏差: -0.04087 色纯度: 99.9 % 色质指数: -nan(ind)
LER(TM-30): 130.5 辐射功率: 6918.7 mw 色域指数(Rg): 16.9 逼真度(Rf): 28.2
红光辐射功率: 6828.1 mw 近红辐射功率: 11.5 mw 远红辐射功率: 2.3 mw

电参数:





光效: 8.7 Lm/W 能效: 9.5 能效等级: G
电压: 219.3 V 电流: 0.726 A 功率: 103.700 W 功率因素: 0.651

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:05/30/14
备注:


Rf: 28.2 CCT: 1000K u': 0.5499
Rg: 16.9 LER: 130.5 Du: 0.04087 v': 0.5174

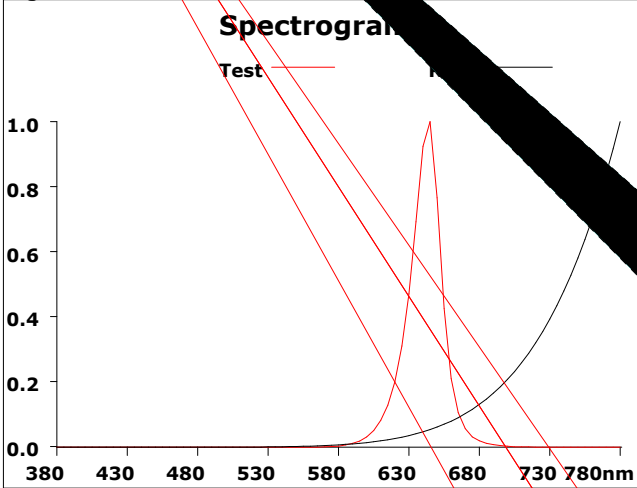

500			
Hue Bin	Rf	Chroma	Hue
1	20.7	-55.3%	0.3%
2	57.1	-66.6%	-4.9%
3	72.8	-77.4%	21.7%
4	100.0	nan%	-nan(ind)%
5	81.7	-58.3%	34.6%
6	100.0	nan%	-nan(ind)%
7	59.8	0.9%	34.0%
	20.6	-42.8%	-6.7%
	2.4	-59.6%	-4.2%
	3.1	-91.6%	14.4%
11	46.0	-82.7%	28.2%
12		-78.5%	-119.9%
13		-102.9%	-50.9%
14	24.2	-51.2%	23.1%
15	28.0	-41.0%	18.0%
16	36.4	-7.3%	

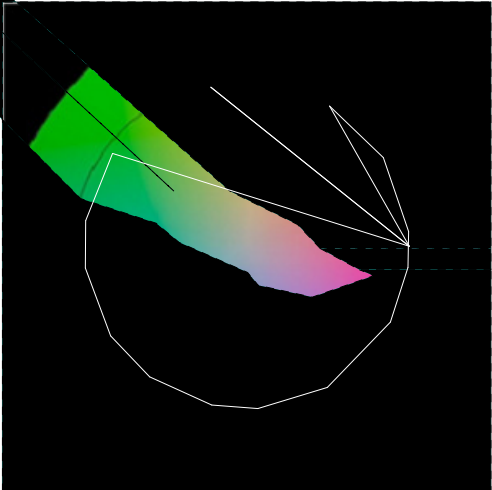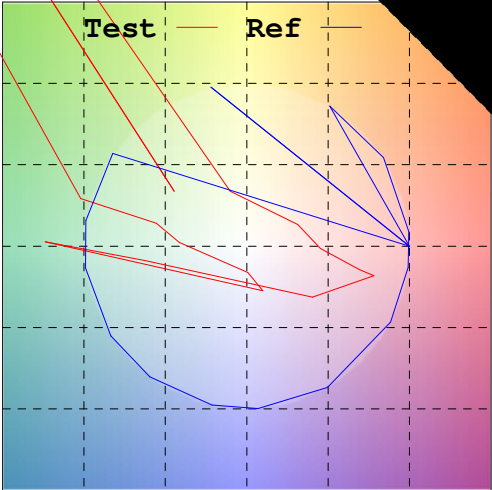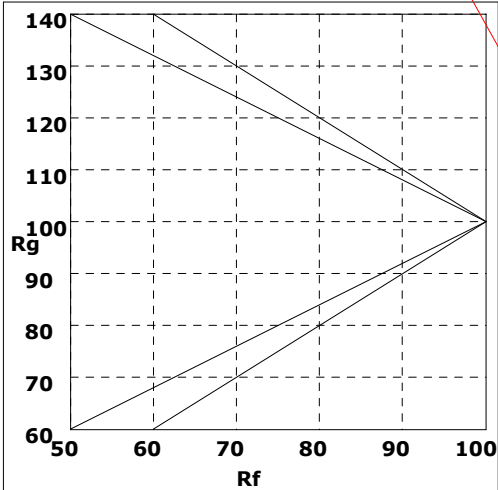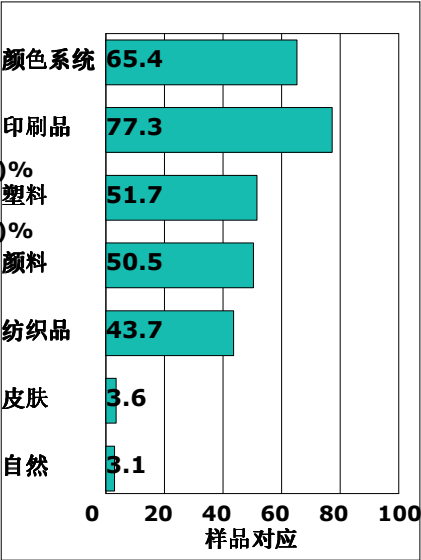

Rf by Bue

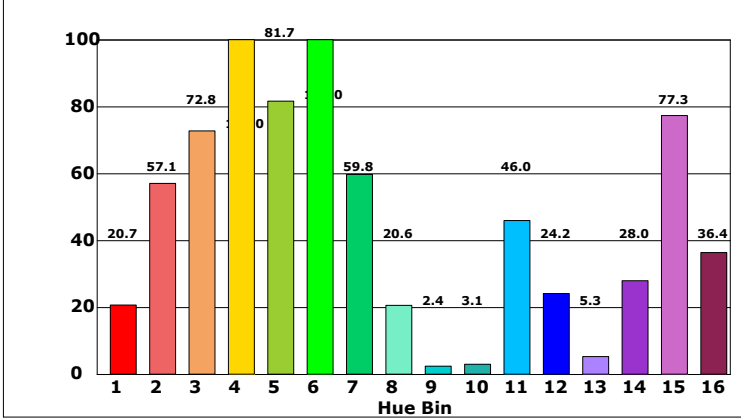

Chroma by Bue



ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173