



光谱图

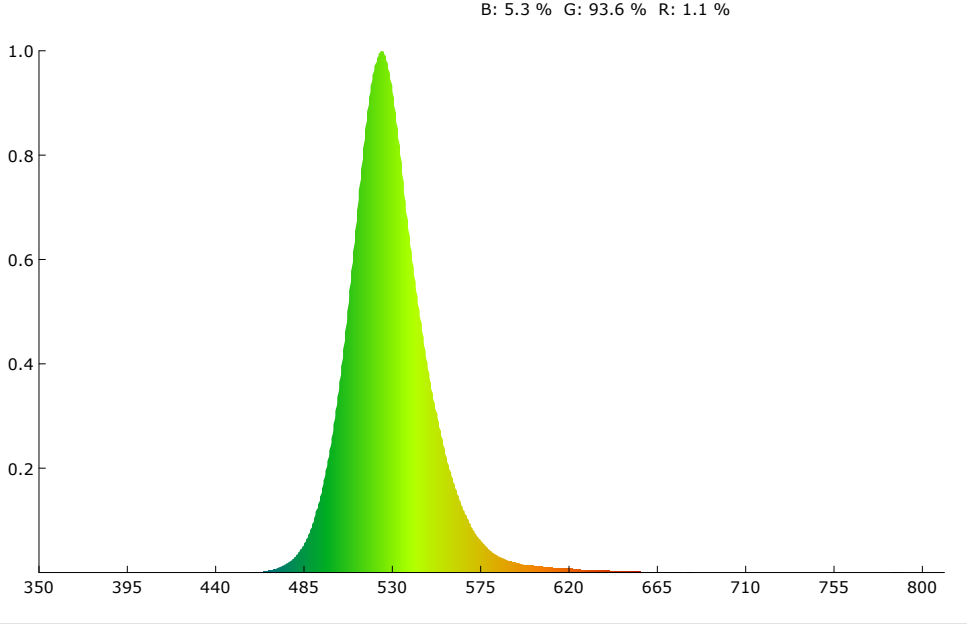

SDCM

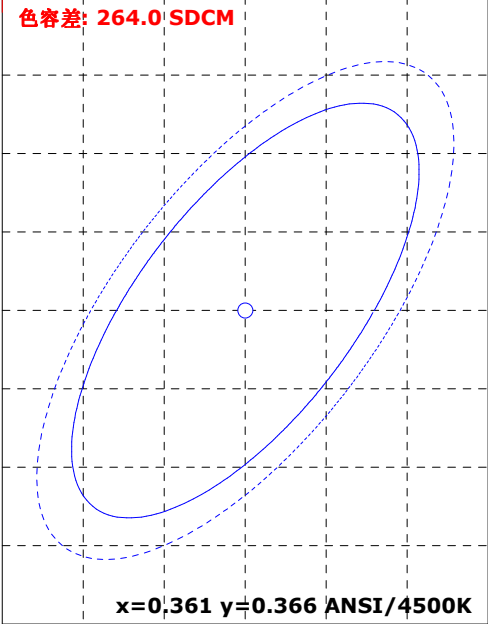

颜色参数:

坐标x: 0.1942 坐标y: 0.7225 坐标u: 0.0689 坐标v: 0.3843 坐标u': 0.0689 坐标v': 0.5764
红色比: 1.1 % 绿色比: 93.6 % 蓝色比: 5.3 % 光通量红色比: 0.5 % 光通量绿色比: 99.1 % 光通量蓝色比: 0.4 %

显色指数: -23.1 AvgR: -36.0
R1: -33.2 R2: -8.0 R3: -20.3 R4: -67.8 R5: -9.9 R6: -10.3 R7: -4.3 R8: -31.5
R9: -99.0 R10: -99.0 R11: -97.8 R12: -27.2 R13: -38.8 R14: 39.8 R15: -33.3


色温: 7464 K 光通量: 1968.180 lm 峰值波长: 525.5 nm 色容差: 264.0
明暗视觉比: 2.5 中心波长: 525.9 nm 主波长: 531.6 nm 质心波长: 529.4 nm
半宽度: 36.2 nm 色偏差: 0.15047 色纯度: 83.7 % 色质指数: 0.4
LER(TM-30): 513.6 辐射功率: 3831.9 mw 色域指数(Rg): 8.5 逼真度(Rf): 1.0
红光辐射功率: 41.4 mw 近红辐射功率: 0.5 mw 远红辐射功率: 0.7 mw

电参数:

光效: 18.8 Lm/W 能效: 20.5 能效等级: G
电压: 219.6 V 电流: 0.730 A 功率: 104.600 W 功率因素: 0.651

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:05/30/14
备注:

Rf: 1.0 CCT: 7464K u': 0.0689
Rg: 8.5 LER: 513.6 Duv: 0.15047 v': 0.5764

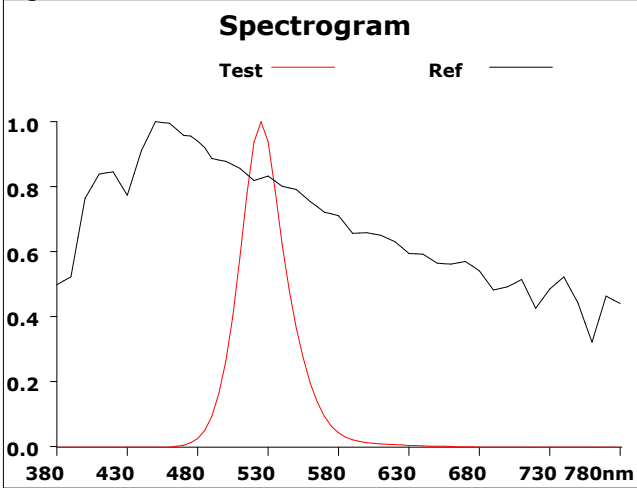

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-80.4%	2.6%
2	0.0	-67.6%	4.3%
3	0.3	-74.1%	-4.5%
4	2.8	-60.5%	-7.5%
5	0.9	-74.9%	-0.5%
6	0.4	-83.7%	5.1%
7	0.3	-77.2%	17.2%
8	0.0	-77.3%	16.8%
9	7.9	-63.6%	34.8%
10	15.5	-47.7%	21.7%
11	3.7	-46.9%	3.6%
12	24.7	-45.5%	-19.5%
13	27.2	-53.1%	-25.2%
14	0.4	-66.6%	-31.9%
15	2.0	-78.2%	-33.8%
16	0.0	-77.5%	-10.9%

