



MINI FRESNEL 100C

RGBL LED fresnel manual zoom

Mini Fresnel 100C is a portable LED fresnel and powered by 250W RGBL LED. Featuring 25°-60° zoom, even color mixing, It deliver a smooth, soft flat field of light. Barn door included for the shape of the light


Key features:

- RGBL flat and even color mixing
- Super compact, easy for set up
- 25° - 60° manual zoom
- Smooth dimming, flicker free
- DMX and RDM controls
- Light weight, super compact size
- Powercon in and out connection


Application:

- Broadcast, HD studio
- Theatre, church
- Film shooting
- Museum
- Exhibition lighting

Accessories:



Barn door




Gel frame




Photometric

R(lx)	2880	690	294	167	155
G(lx)	7460	1780	774	457	322
B(lx)	1730	447	195	111	79.1
L(lx)	9670	2320	996	590	439
Full on(lx)	6080	1470	639	371	260

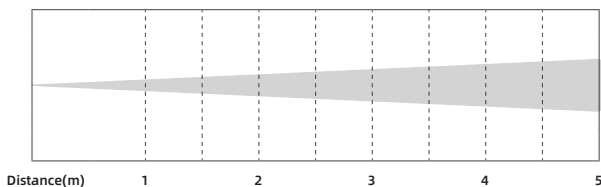

Minimum Spot - 25°

R(lx)	1140	270	116	70.4	60.4
G(lx)	3150	730	324	189	139
B(lx)	785	186	80.7	47.9	33.2
L(lx)	3870	882	399	234	176
Full on(lx)	2460	577	257	149	107

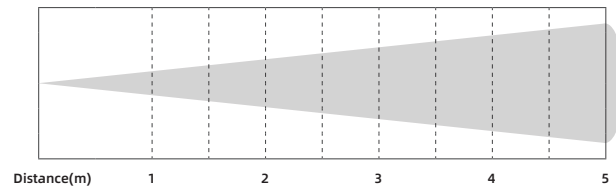

Maximum Spot - 60°

Technical Data

Power supply: AC100-240V, 50/60Hz

Light source: 250W RGBL

Zoom range: 25° - 60° manual zoom

Power connection: PowerCON in & out

Signal connection: 3-pin XLR in & out

Control channels: ARC.1(3CH), AR1.D(4CH),
ARC.2(4CH), AR2.D(5CH),
AR2.S(6CH), HSV(3CH), STAG(11CH)

Control mode: DMX and RDM controls

Dimmer speed: 4 grade

Housing: Colour black, Aluminum

Size: 212 x 165 x 262mm(8.4 x 6.5 x 10.3in)

N.W.: 2.3kg(barn door included)

G.W.: 2.8kg

Accessories(incl.): Power cable, barn door, gel frame, safety rope

Accessories(opt.): Clamp

Environment: IP20

